

Table of Contents

Table of Contents	1
Air Title V Operating Permit (AOP) - Renewal	2
(Submission #: HQ3-Z3BW-JP0XT, version 1)	2
Details	2
Form Input	2
Form Instructions	2
Section A - Permit Information	2
Section B (Part 1) - Facility Information	3
Section B (Part 2) - Additional Location Information	4
Section C - Nature of Business	4
Section D - Process Equipment Information (1 of 1)	4
Emission Unit -	4
Section F - Facility-Wide Applicable Regulations and Potential to Emit (PTE)	5
Section G - Compliance Schedule	5
Section H - Flexible Permits	6
Section I - Compliance Assurance Monitoring (CAM)	6
Section K - Redline Permit Upload	6
Section L - General Document Upload	6
Attachments	6
Status History	6
Agreements and Signature(s)	8

Air Title V Operating Permit (AOP) - Renewal

version 2.5

(Submission #: HQ3-Z3BW-JP0XT, version 1)

Details

Submission ID HQ3-Z3BW-JP0XT

Status In Process

Form Input

Form Instructions

In accordance with 33.1-15-14-04.c. of the North Dakota Air Pollution Control Rules, a Title V permit renewal application must be submitted to the Department at least six months, but no more than eighteen months, prior to the expiration date. Permit renewal applications are incomplete unless all information requested in SFN 52824 is supplied. The current Title V permit will be the baseline reference for a renewal. The requirements (40 CFR 70.5(c) & NDAC 33.1-15-14-06.4.c) to include a citation and description of all applicable requirements and a description of or reference to any applicable test method for determining compliance with each applicable requirement may be met by accomplishing either or both of the following: 1) provide an annotated (red-lined) copy of the current permit indicating all changes needed to reflect the current facility configuration, applicable requirements and test methods; 2) provide a narrative that conveys all changes needed to the current permit to reflect the current facility configuration, all applicable requirements and test methods.

FOR ACID RAIN UNITS ONLY ♦ Submit with the Title V permit renewal application all Acid Rain renewal applications (the Acid Rain Permit Application, the Phase II NOx Compliance Plan, and if applicable, the Phase II NOx Averaging Plan).

When completing the online application, if uploaded files are provided in each section (when indicated), do not include those same files in the General Document Upload/File Upload section. If uploading the application files in the General Document Upload/File Upload section, only fill out the required (asterisked) sections of the online application.

Section A - Permit Information

Permit Number

AOP-28379

Permit Version

5

Issue Date

02/06/2020

Expiration Date

01/06/2025

Permittee

Company Name

Cargill Corn Milling

Address

18049 County Road 8 East

Wahpeton, ND 58075

United States

Responsible Official**Prefix**

NONE PROVIDED

First Name Last Name

Josh Fritz

Title

NONE PROVIDED

Phone Type Number Extension

Business 7016711641

Email

joshua_fritz@cargill.com

Address

18049 County Road 8 East

Wahpeton, ND 58075

United States

Contact Person for Air Pollution Matters**Prefix**

NONE PROVIDED

First Name Last Name

Stephaine Haken

Title

NONE PROVIDED

Phone Type Number Extension

Business 7016711742

Email

s_haken@cargill.com

Address

18049 County Road 8 East

Wahpeton, ND 58075

United States

Section B (Part 1) - Facility Information**Facility Name**

Cargill Corn Milling

Have you added, removed, or made any modifications to equipment since your last operating permit issuance?

No

Is this source subject to Title IV Acid Rain regulations?

No

Is this a portable source?

No

Facility Location

18049 County Road 8 East

Wahpeton, ND 58075

United States

County

Richland

Facility Location:

46.3443580000000,-96.64058100000000

18049 County Road 8 East, Wahpeton, ND

Section B (Part 2) - Additional Location Information

Legal Description of Facility Site

Qtr Qtr	Qtr	Section	Township	Range
SE	SW	7	133N	47W

Land area at facility site (indicate whether measurement is in acres or sq. ft.)

NONE PROVIDED

MSL elevation at facility

NONE PROVIDED

Section C - Nature of Business

General Nature of Business

Describe Nature of Business	NAICS Code	SIC Code
Wet Corn Milling	311221-Wet Corn Milling	2046-Wet Corn Milling

Actual Start of Construction Date

NONE PROVIDED

Actual End of Construction Date

NONE PROVIDED

Facility Startup Date

NONE PROVIDED

Section D - Process Equipment Information (1 of 1)

Emission Unit -

Emission Unit ID

NONE PROVIDED

Emission Unit Description

NONE PROVIDED

Emission Point ID

NONE PROVIDED

Emission Point Description

NONE PROVIDED

Emission Process Description

NONE PROVIDED

Emission Unit Status

NONE PROVIDED

Applicable PTCs

PTC Number

Applicable Federal Air Programs

Program Code

Applicable State Regulations

Regulation

Emission Unit form

Download the emission unit form linked here, complete it, and upload it to this application using the attachment control below.

When completing the online application, if uploaded files are provided in each section (when indicated), do not include those same files in the General Document Upload/File Upload section. If uploading the application files in the General Document Upload/File Upload section, only fill out the required (asterisked) sections of the online application.

[EMISSION UNIT FOR TITLE V PERMIT TO OPERATE \(SFN61006\)](#)

Attach Emission Unit Form

NONE PROVIDED
Comment
NONE PROVIDED

Section F - Facility-Wide Applicable Regulations and Potential to Emit (PTE)

Applicable Federal Air Programs

Program Code

Applicable State Regulations

Regulation

Potential to Emit (PTE)

Pollutant	Tons Per Year Without Fugitives	Tons Per Year With Fugitives
NOx	NONE PROVIDED	NONE PROVIDED
CO	NONE PROVIDED	NONE PROVIDED
VOCs	NONE PROVIDED	NONE PROVIDED
SO2	NONE PROVIDED	NONE PROVIDED
PM	NONE PROVIDED	NONE PROVIDED
PM10	NONE PROVIDED	NONE PROVIDED
PM2.5	NONE PROVIDED	NONE PROVIDED
Total HAPs	NONE PROVIDED	NONE PROVIDED

Emission Calculations Document Upload

Using the attachment control below, upload emission calculations documents.

When completing the online application, if uploaded files are provided in each section (when indicated), do not include those same files in the General Document Upload/File Upload section. If uploading the application files in the General Document Upload/File Upload section, only fill out the required (asterisked) sections of the online application.

Attach Emission Calculations Documents

NONE PROVIDED
Comment
NONE PROVIDED

Section G - Compliance Schedule

Will your facility be in compliance with all applicable requirements effective at the time of permit issuance?

Yes

Will your facility be in compliance with all applicable requirements effective after the time of permit issuance?

Yes

Section H - Flexible Permits

Are you requesting a flexible permit?

No

Section I - Compliance Assurance Monitoring (CAM)

To determine if your facility is subject to CAM, review the information provided at the following link.

[Compliance Assurance Monitoring \(CAM\) Guidance](#)

Is the facility identified in this application in compliance with applicable monitoring and compliance certification requirements?

Yes, the facility IS in compliance with applicable monitoring and compliance certification requirements.

Section K - Redline Permit Upload

Use the attachment control below to upload a redline version of your existing permit document, showing any changes.

When completing the online application, if uploaded files are provided in each section (when indicated), do not include those same files in the General Document Upload/File Upload section. If uploading the application files in the General Document Upload/File Upload section, only fill out the required (asterisked) sections of the online application.

Attach redline version of permit here

[CargillCornRenewalApp.pdf - 05/28/2024 08:46 AM](#)

Comment

NONE PROVIDED

Section L - General Document Upload

File Upload

Use the attachment control below to upload any other information necessary for application review, such as plot plans, process diagrams, maps, etc.

When completing the online application, if uploaded files are provided in each section (when indicated), do not include those same files in the General Document Upload/File Upload section. If uploading the application files in the General Document Upload/File Upload section, only fill out the required (asterisked) sections of the online application.

Attachments

NONE PROVIDED

Comment

NONE PROVIDED

Additional Forms

NONE PROVIDED

Attachments

Date	Attachment Name	Context	User
5/28/2024 8:46 AM	CargillCornRenewalApp.pdf	Attachment	Schneider, K.

Status History

	User	Processing Status
5/28/2024 8:35:01 AM	Schneider, Kyla K.	Draft
5/28/2024 8:48:12 AM	Schneider, Kyla K.	Submitting
5/28/2024 8:48:20 AM	Schneider, Kyla K.	Submitted
5/28/2024 8:48:22 AM	Schneider, Kyla K.	In Process

Agreements and Signature(s)

SUBMISSION AGREEMENTS

- I am the owner of the account used to perform the electronic submission and signature.
- I have the authority to submit the data on behalf of the facility I am representing.
- I agree that providing the account credentials to sign the submission document constitutes an electronic signature equivalent to my written signature.
- I have reviewed the electronic form being submitted in its entirety, and agree to the validity and accuracy of the information contained within it to the best of my knowledge.

I certify under penalty of law that the enclosed documents and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I also certify that the source(s) identified in this application is/are in compliance with all applicable requirements except those requirements for which a compliance schedule has been submitted in the Compliance Schedule Form or Compliance Schedule Section of the application. I understand that failure to comply with any term of a compliance schedule is considered to be a violation of regulation NDAC 33.1-15-14-06.1.e. The source will continue to comply with the current applicable requirements with which it is in compliance. The source will meet, on a timely basis, any applicable requirement, which becomes effective during the permit term. The source is properly implementing any required risk management plan in accordance with section 112(r) of the federal clean air act, if appropriate.

I certify, as the Responsible Official, that I have read and understood the above requirements and conditions applicable to my source/facility and that the information and attachments provided in this application are true, accurate, and complete to the best of my knowledge." Further, I agree to comply with the provisions of Chapter 23.1-06 of the North Dakota Century Code and all rules and regulations of the Department, or revisions thereof. I also understand a permit is nontransferable and, if granted a permit, I will promptly notify the Department upon sale or legal transfer of this permitted establishment.

Note: This certification must be signed by a "responsible official" as defined in NDAC 33.1-15-14-06.1.

Signing was skipped by Schneider, Kyla K. on 05/28/2024



May 21st, 2024

Air Program (8P-AR)
Office of Partnerships & Regulatory Assistance
US EPA Region 8
1595 Wynkoop Street
Denver, CO 80202-1129

Re: Renewal of Title V Permit to Operate

To Whom it May Concern:

The Cargill, Incorporated (Cargill) Starches, Sweeteners, and Texturizers facility located at 18049 County Road 8 East in Wahpeton, North Dakota is currently operating under a Title V Permit to Operate #T5-G98001 issued by the North Dakota Department of Environmental Quality (NDDEQ) on February 6, 2020 which is set to expire on January 6, 2025. Cargill is required to submit a renewal application no earlier than eighteen months prior to the expiration date but no later than six months. This application satisfies the requirement to submit no later than July 6, 2024.

If you have any questions, please do not hesitate to call me at (701) 671-1641.

Sincerely,

A handwritten signature in black ink that reads "Josh Fritz".

Josh Fritz
Facility Manager

Enc.



TITLE V PERMIT TO OPERATE - RENEWAL APPLICATION
 NORTH DAKOTA DEPARTMENT OF ENVIRONMENTAL QUALITY
 DIVISION OF AIR QUALITY
 SFN 52824 (9-2021)

In accordance with 33.1-15-14-04.c. of the North Dakota Air Pollution Control Rules, a Title V permit renewal application must be submitted to the Department at least six months, but no more than eighteen months, prior to the expiration date. Permit renewal applications are incomplete unless all information requested herein is supplied. The current Title V permit will be the baseline reference for this renewal. The requirements (40 CFR 70.5(c) & NDAC 33.1-15-14-06.4.c) to include a citation and description of all applicable requirements and a description of or reference to any applicable test method for determining compliance with each applicable requirement may be met by accomplishing either or both of the following: 1) enclose an annotated (red-lined) copy of the current permit indicating all changes needed to reflect the current facility configuration, applicable requirements and test methods; 2) enclose a narrative that conveys all changes needed to the current permit to reflect the current facility configuration, all applicable requirements and test methods.

FOR ACID RAIN UNITS ONLY – Submit with the Title V permit renewal application all Acid Rain renewal applications (the Acid Rain Permit Application, the Phase II NO_x Compliance Plan, and if applicable, the Phase II NO_x Averaging Plan).

PART 1. GENERAL APPLICATION INFORMATION

Owner's Name	Cargill, Inc.		
Facility Name	Cargill, Inc. (Wahpeton, ND)		
Name of Person Completing Application	Josh Fritz	Phone	701-671-1641
Title	Facility Manager	Email	joshua_fritz@cargill.com
Current Operating Permit Number	T5-G98001		
Expiration Date of Current Operating Permit	01	/	06 / 2025

PART 2. COMPLIANCE CERTIFICATION

A. Schedule for Submission of Compliance Certifications During the Term of the Permit

Frequency of Submittal	Date Beginning (month/day/year)
Annual	02/15/2025


B. Statement of Compliance with Compliance Assurance Monitoring (CAM) and Compliance Certification Requirements

The facility identified in this application is in compliance with applicable monitoring and compliance certification requirements.	
<input checked="" type="checkbox"/>	Yes
<input type="checkbox"/>	No - Describe below which requirements are not being met:
<input type="checkbox"/>	CAM not applicable

C. Certification of Compliance with all Applicable Requirements

This certification must be signed by a "responsible official" as defined in NDAC 33.1-15-14-06.1. Forms without a signed certification will be returned as incomplete.

Except for requirements identified in Compliance Schedule and Plan (Section G) of Title V Permit to Operate application forms for which compliance is not achieved, I hereby certify that, based on information and belief formed after reasonable inquiry, the air contaminant source identified in this form is in compliance with all applicable requirements.

Signed 	Date 5/21/24
Typed Name Josh Fritz	

PART 3. STATUS OF SOURCE

Has there been any change to the source since the most recent initial or renewal permit application, minor permit modification, significant modification or administrative permit amendment?

No Yes


If yes, complete and submit appropriate sections of Title V Permit to Operate application forms.

PART 4. CERTIFICATION OF TRUTH, ACCURACY AND COMPLETENESS

Note: This certification must be signed by a "responsible official" as defined in NDAC 33.1-15-14-06.1. Applications without a signed certification will be returned as incomplete.

I certify under penalty of law that, based on information and belief formed after reasonable inquiry, the statements and information contained in this application are true, accurate and complete.

Name (typed) Josh Fritz

(Signed)  Date 5 / 24 / 24

Telephone Number 701-671-1641

Send original renewal application to:

North Dakota Department of Environmental Quality
 Division of Air Quality
 4201 Normandy Street, 2nd Floor
 Bismarck, ND 58503-1324
 (701)328-5188

Send copy of renewal application to:


Air Program (8P-AR)
 Office of Partnerships & Regulatory Assistance
 US EPA Region 8
 1595 Wynkoop Street
 Denver, CO 80202-1129

AIR POLLUTION CONTROL TITLE V PERMIT TO OPERATE

Permittee: Name: Cargill Corn Milling Address: 18049 County Road 8 E Wahpeton, ND 58075	Permit Number: T5-G98001 Source Name: Cargill Corn Milling
Source Location: 18049 County Road 8 E NW ¼, SE ¼, Sec. 7, T133N, R47W Wahpeton, ND Richland County, North Dakota	Source Type: Corn Wet Milling
Expiration Date: January 6, 2025	

Pursuant to Chapter 23.1-06 of the North Dakota Century Code (NDCC), and the Air Pollution Control Rules of the State of North Dakota, Article 33.1-15 of the North Dakota Administrative Code (NDAC), and in reliance on statements and representations heretofore made by the permittee (i.e., owner) designated above, a Title V Permit to Operate is hereby issued authorizing such permittee to operate the emissions units at the location designated above. This Title V Permit to Operate is subject to all applicable rules and orders now or hereafter in effect of the North Dakota Department of Environmental Quality (Department) and to any conditions specified on the following pages. All conditions are enforceable by EPA and citizens under the Clean Air Act unless otherwise noted.

Renewal No. 4: 2/6/20
 Revision No. 0: _____



 James L. Semerad
 Director
 Division of Air Quality

Cargill Corn Milling
Title V Permit to Operate
Table of Contents

<u>Condition</u>	<u>Page No.</u>
1. Emission Unit Identification	3
2. Fuel Restrictions	5
3. Applicable Standards and Miscellaneous Requirements	5
4. Emission Unit Limits	6
5. Monitoring Requirements and Conditions	15
6. Recordkeeping Requirements	22
7. Reporting	25
8. Facility Wide Operating Conditions	26
9. General Conditions	33
10. State Enforceable Only Conditions (not Federally enforceable)	39
Attachment A - NO _x Alternative Monitoring Plan	
Attachment B - Compliance Assurance Monitoring (CAM) Plan CEP1, FEP26, FEP80, MEP12, MEP13 and FEP18	

1. **Emission Unit Identification:**

The emission units regulated by this permit are as follows:

Emission Unit Description	Emission Unit (EU)	Emission Point (EP)	Air Pollution Control Equipment
Grain unloading	CEP1	CEP1	Baghouse
Corn silos	CEP2 ^A	CEP2	Baghouse
Grain unloading (corn cleaner)	MEP10 ^A	MEP10	Baghouse
Corn silo (fines)	FEP11 ^A	FEP11	Vent Filter
Steep tanks	MEP12	MEP12	Caustic Scrubber
Millhouse tanks	MEP13	MEP13	Caustic Scrubber
Feedhouse tanks	FEP18	FEP18	Caustic Scrubber
23 x 10 ⁶ Btu/hr thermal oxidizer (stack)	FEP20	FEP20	None
		DS1 ^A & DS2 ^A (see Note)	None
Gluten dryer	FEP21	FEP21	Scrubber
Grain cleanings transfer	FEP22 ^A	FEP22	Baghouse
Fiber pellet cooler	FEP26	FEP26	Cyclone
Germ handling	FEP27 ^A	FEP27	Baghouse
Gluten handling	FEP28 ^A	FEP28	Baghouse
Germ storage bin	FEP29 ^A	FEP29	Vent Filter
Gluten meal system	FEP30 ^A	FEP30	Vent Filter
Feed loading	FEP32 ^A	FEP32	Dust Control System
Feed loading	FEP75 ^A	FEP75	Dust Control System
Dextrose precoat make-up tank	REP38 ^A	REP38	Baghouse
Check precoat make-up tank	REP39 ^A	REP39	Baghouse
Carbon regeneration furnace	REP41	REP41	Caustic Scrubber & Afterburner
245 x 10 ⁶ Btu/hr main boiler fired on natural gas (constructed post 6/19/84; see Cond. 2.A)	UEP53	UEP53	None
308 hp (nominal) diesel engine-driven emergency generator (Pre-2006)	UEP78 ^{A, B}	UEP78	None
Diesel-fired emergency fire pump engine, 125 hp (manf. August 1999)	UEP87 ^{A, B}	UEP87	None
Wastewater flare	WEP56	WEP56	None
Filter aid silo	IEP58 ^A	IEP58	Baghouse
Lime storage silo	IEP61 ^A	IEP61	Baghouse
Soda ash storage silo	WEP71 ^A	WEP71	Baghouse

Emission Unit Description	Emission Unit (EU)	Emission Point (EP)	Air Pollution Control Equipment
Germ dryer cooler	FEP77	FEP77	Cyclone
Fiber bin and pellet bin	FEP80	FEP80	Baghouse
Fiber cooler	FEP81	FEP81	Cyclone
Corn fines/cracks transfer	FEP82 ^A	FEP82	Baghouse
Ground fiber bin	FEP83 ^A	FEP83	Vent Filter
8.1 x 10 ⁶ (nominal) Btu/hr natural gas-fired utility building heater (2017)	UEP84 ^A	UEP84	None
191.4 x 10 ⁶ Btu/hr standby boiler fired on natural gas (constructed 1977)	UEP85	UEP85	None
Corn cleaner and weigh belt vacuum system dust collector	IEP86 ^A	IEP86	Dust Control System
Two hydrochloric acid (HCl) storage tanks 23,691 gallons each	REP48 ^A	REP48	Scrubber
3,000-gallon chemical storage tank	REP49 ^A	REP49	Scrubber
Two 12.5% sodium hypochlorite storage tanks; 3,000 gallons (water plant) & 5,000 gallons (near cooling towers)	REP50 ^A & REP51 ^A	REP50 & REP51	None

^A Insignificant or fugitive emission sources (no specific emission limit).

^B The potential to emit for an emergency stationary reciprocating internal combustion engine (RICE) is based on operating no more hours per year than is allowed by the subpart (40 CFR 63, Subpart ZZZZ) for other than emergency situations. For engines to be considered emergency stationary RICE under the RICE rules, engine operations must comply with the operating hour limits as specified in the applicable subpart. There is no time limit on the use of emergency stationary RICE in emergency situations.

Note: DS1 (germ dryer dump stack) and DS2 [thermal oxidizer (TO) dump stack] are safety devices used in the process of purging burners prior to ignition.

A. Fugitive Emissions Sources:

- 1) Mill/feed cooling tower.
- 2) Refinery cooling tower.
- 3) Sulfur dioxide (leaks) valves and piping.
- 4) Wastewater plant (tanks, sequencing batch reactors and ponds).

2. Fuel Restrictions:

- A. The 245 x 10⁶ Btu/hr main boiler EU UEP53 shall be operated using only pipeline quality natural gas.
- B. The carbon regeneration furnace EU REP41, utility building heater EU UEP84 and the standby boiler EU UEP85 shall be operated using pipeline quality natural gas only.
- C. The wastewater flare EU WEP56 shall only be used to combust biogas (approximately 65% methane and 35% carbon dioxide with traces of H₂S and H₂O).
- D. The thermal oxidizer EU FEP20 shall be operated using only pipeline quality natural gas or biogas.
- E. The diesel engine-driven emergency generator EU UEP78 and emergency fire pump engine EU UEP87 shall be operated using only distillate oil.
- F. Pipeline quality natural gas shall contain no more than 2 grains of sulfur per 100 scf and distillate oil shall contain no more than 0.0015 percent sulfur by weight. This fuel restriction ensures compliance with NDAC 33.1-15-06-01.2.

Applicable Requirements: NDAC 33.1-15-14-02.9.f, NDAC 33.1-15-14-06.5.b(1) and NDAC 33.1-15-06-01.2

3. Applicable Standards and Miscellaneous Requirements:

- A. New Source Performance Standards (NSPS): The permittee shall comply with all applicable requirements of the following NDAC 33.1-15-12-02 and 40 CFR 60 subparts in addition to complying with Subpart A – General Provisions.
 - 1) Subpart Db – Standards of Performance for Industrial-Commercial-Institutional Steam Generating Units; main boiler (UEP53) and standby boiler (UEP85).
- Applicable Requirements: NDAC 33.1-15-12, Subparts A & Db
- B. Maximum Achievable Control Technology (MACT): The permittee shall comply with all applicable requirements of the following NDAC 33.1-15-22-03 and 40 CFR 63 subparts in addition to complying with Subpart A - General Provisions.
 - 1) Subpart ZZZZ – National Emission Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines (EU UEP78 and UEP87). The North Dakota Department of Environmental Quality has not adopted the area source provisions of this subpart. Send all required reports and documentation to EPA Region 8 at the following address:

U.S. EPA Region 8
1595 Wynkoop Street
Mail Code 8ENF-AT
Denver, CO 80202-1129

Applicable Requirements: 40 CFR 63, Subparts A & ZZZZ

- C. Dump Stack Operation: The dump stacks (DS1 and DS2) shall only be operated when necessary to purge the associated burners or during a malfunction at the facility that necessitates operation of the dump stacks. A record shall be maintained of each instance when a dump stack is operated. The record shall include the date and time of dump stack operation and the reason the dump stack was operated. Records shall be maintained for a period of 5 years.

Applicable Requirement: Permit to Construct (PTC)11030

- D. Like-Kind Engine Replacement: This permit allows the permittee to replace the existing engine(s) with a like-kind engine. Replacement is subject to the following conditions.
- 1) The Department must be notified within 10 days after change-out of the engine.
 - 2) The replacement engine shall operate in the same manner, provide no increase in throughput and have equal or less emissions than the engine it is replacing.
 - 3) The date of manufacture of the replacement engine must be included in the notification. The facility must comply with any applicable federal standards (e.g. NSPS, NESHAP, MACT) triggered by the replacement.
 - 4) The replacement engine is subject to the same state emission limits as the existing engine in addition to any NSPS or MACT emission limit that is applicable.

Applicable Requirement: NDAC 33.1-15-14-06.5.b(1)

4. **Emission Unit Limits:**

- A. The emissions of air contaminants and parameter limits from the emission units shall not exceed the following limits:

Emission Unit Description	EU	EP	Pollutant/Parameter	Emission/Parameter Limit ^A	NDAC Applicable Requirement
Grain unloading	CEP1	CEP1	PM	1.22 lb/hr	PTC 2/26/97
			PM ₁₀	0.586 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Corn silos	CEP2	CEP2	PM	0.309 lb/hr	PTC 2/26/97
			PM ₁₀	0.148 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Grain unloading (corn cleaner)	MEP10	MEP10	PM	0.189 lb/hr	PTC 2/26/97
			PM ₁₀	0.174 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Corn silo (fines tank)	FEP11	FEP11	PM	0.030 lb/hr	PTC 2/26/97
			PM ₁₀	0.014 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Steep tanks	MEP12	MEP12	SO ₂	0.101 lb/hr	PTC 2/26/97
			VOC	16.65 lb/hr	PTC09009
			HAP	0.23 lb/hr	PTC09009
			Opacity	See Cond. 4.C	33.1-15-03
Millhouse tanks	MEP13	MEP13	SO ₂	0.096 lb/hr	PTC 2/26/97
			VOC	8.1 lb/hr	PTC09009
			HAP	0.25 lb/hr	PTC09009
			Opacity	See Cond. 4.C	33.1-15-03
Feedhouse tanks	FEP18	FEP18	SO ₂	0.096 lb/hr	PTC 2/26/97
			VOC	8.1 lb/hr	PTC09009 Amend. 1
			HAP	0.26 lb/hr	PTC09009 Amend. 1
			Opacity	See Cond. 4.C	33.1-15-03

Emission Unit Description	EU	EP	Pollutant/Parameter	Emission/Parameter Limit ^A	NDAC Applicable Requirement
Thermal oxidizer (stack) & gluten dryer	FEP20 & FEP21	FEP20 & FEP21	PM	2.60 lb/hr ^B	PTC00001
			PM ₁₀	2.60 lb/hr ^B	PTC00001
			SO ₂	20.0 lb/hr ^B & 40.03 lb/hr ^{B, C}	PTC00001
			NO _x	9.32 lb/hr ^B	PTC00001
			CO	28.0 lb/hr ^B	PTC00001
			Opacity (each stack)	See Cond. 4.C	33.1-15-03
			Thermal oxidizer temperature	≥ 1425 ¹³⁵⁰ °F (3-hr avg.)	PTC13046 & 8/22/13 Compliance Stack Test
			Scrubber flow	≥ 100 gpm (3-hr avg.)	PTC09009
			Scrubber pH	≥ 3 (daily avg.)	PTC09009
			Scrubber pressure drop	≥ 4 in H ₂ O (daily avg.)	PTC09009
			Gluten Dryer VOC	13.0 lb/hr ^B	PTC13046
			Gluten Dryer HAP	1.67 lb/hr ^B	PTC13046
Grain cleanings transfer	FEP22	FEP22	PM	0.063 lb/hr	PTC 2/26/97
			PM ₁₀	0.058 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03

Emission Unit Description	EU	EP	Pollutant/Parameter	Emission/Parameter Limit ^A	NDAC Applicable Requirement
Fiber pellet cooler	FEP26	FEP26	PM	9.00 lb/hr	PTC 2/26/97
			PM ₁₀	6.93 lb/hr	PTC 2/26/97
			VOC	3.89 lb/hr	PTC09009
			HAP	0.97 lb/hr	PTC09009
			Opacity	See Cond. 4.C	33.1-15-03
Germ handling	FEP27	FEP27	PM	0.192 lb/hr	PTC 2/26/97
			PM ₁₀	0.177 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Gluten handling	FEP28	FEP28	PM	0.111 lb/hr	PTC 2/26/97
			PM ₁₀	0.102 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Germ storage bin	FEP29	FEP29	PM	0.009 lb/hr	PTC 2/26/97
			PM ₁₀	0.008 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Gluten meal system	FEP30	FEP30	PM	0.009 lb/hr	PTC 2/26/97
			PM ₁₀	0.008 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Feed loading	FEP32	FEP32	PM	0.309 lb/hr	PTC 2/26/97
			PM ₁₀	0.284 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03

Emission Unit Description	EU	EP	Pollutant/Parameter	Emission/Parameter Limit ^A	NDAC Applicable Requirement
Feed loading	FEP75	FEP75	PM	0.309 lb/hr	PTC 2/26/97
			PM ₁₀	0.284 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Dextrose precoat make-up tank	REP38	REP38	PM	0.078 lb/hr	PTC 2/26/97
			PM ₁₀	0.078 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Check precoat make-up tank	REP39	REP39	PM	0.078 lb/hr	PTC 2/26/97
			PM ₁₀	0.078 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Carbon regeneration furnace	REP41	REP41	PM	1.05 lb/hr	PTC 2/26/97
			PM ₁₀	1.05 lb/hr	PTC 2/26/97
			SO ₂	2.0 lb/hr	PTC00001
			NO _x	10.0 lb/hr	PTC00001
			CO	15.0 lb/hr	PTC00001
			VOC	2.03 lb/hr	PTC09009
			HAP	0.45 lb/hr	PTC09009
			Temperature	≥ 1446 F (3-hour avg.)	PTC09009
Opacity	See Cond. 4.C	33.1-15-03			

Emission Unit Description	EU	EP	Pollutant/Parameter	Emission/Parameter Limit ^A	NDAC Applicable Requirement
245 x 10 ⁶ Btu/hr main boiler	UEP53	UEP53	PM	0.39 lb/10 ⁶ Btu & 1.23 lb/hr	33.1-15-05 & PTC00001
			PM ₁₀	1.23 lb/hr	PTC 2/26/97
			SO ₂	3 lb/10 ⁶ Btu & 0.49 lb/hr	33.1-15-06 & PTC 6/2/95
			NO _x	17.15 lb/hr & 0.2 lb/10 ⁶ Btu (30-day rolling avg)	PTC 2/26/97 & 33.1-15-12, Subpart Db
			CO	8.0 lb/hr (24-hour rolling avg) & 24.0 lb/hr	PTC00001
			VOC	1.32 lb/hr	PTC09009
			HAP	0.45 lb/hr	PTC09009
			Opacity	See Cond. 4.C	33.1-15-03
Wastewater flare	WEP56	WEP56	Fuel Flow	See Cond. 4.B	PTC 2/26/97
			PM	0.121 lb/hr	PTC 2/26/97
			PM ₁₀	0.121 lb/hr	PTC 2/26/97
			SO ₂	20.03 lb/hr	PTC 2/26/97
			NO _x	0.685 lb/hr	PTC 2/26/97
			CO	3.73 lb/hr	PTC 6/2/95
Filter aid silo	IEP58	IEP58	Opacity	See Cond. 4.E	33.1-15-03
			PM	0.064 lb/hr	PTC 2/26/97
			PM ₁₀	0.064 lb/hr	PTC 2/26/97
Lime storage silo	IEP61	IEP61	Opacity	See Cond. 4.C	33.1-15-03
			PM	0.161 lb/hr	PTC 2/26/97
			PM ₁₀	0.156 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03

Emission Unit Description	EU	EP	Pollutant/Parameter	Emission/Parameter Limit ^A	NDAC Applicable Requirement
Soda ash storage silo	WEP71	WEP71	PM	0.161 lb/hr	PTC 2/26/97
			PM ₁₀	0.156 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Germ dryer cooler	FEP77	FEP77	PM	1.50 lb/hr	PTC 2/26/97
			PM ₁₀	1.50 lb/hr	PTC 2/26/97
			VOC	1.67 lb/hr	PTC09009
			HAP	0.42 lb/hr	PTC09009
			Opacity	See Cond. 4.C	33.1-15-03
Fiber bin and pellet bin	FEP80	FEP80	PM	1.03 lb/hr	PTC 2/26/97
			PM ₁₀	0.948 lb/hr	PTC 2/26/97
			VOC	1.51 lb/hr	PTC09009
			HAP	0.38 lb/hr	PTC09009
			Opacity	See Cond. 4.C	33.1-15-03
Germ Fiber cooler	FEP81	FEP81	PM	0.771 lb/hr	PTC 2/26/97
			PM ₁₀	0.594 lb/hr	PTC 2/26/97
			VOC	0.4 lb/hr	PTC09009
			HAP	0.1 lb/hr	PTC09009
			Opacity	See Cond. 4.C	33.1-15-03

Emission Unit Description	EU	EP	Pollutant/Parameter	Emission/Parameter Limit ^A	NDAC Applicable Requirement
Corn fines/cracks transfer	FEP82	FEP82	PM	0.103 lb/hr	PTC 2/26/97
			PM ¹⁰	0.095 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Ground fiber bin	FEP83	FEP83	PM	0.009 lb/hr	PTC 2/26/97
			PM ¹⁰	0.008 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03
Diesel engine-driven emergency generator	UEP78	UEP78	NO _x	9.55 lb/hr	33.1-15-14-06.5.b(1)
			CO	2.06 lb/hr	33.1-15-14-06.5.b(1)
			Opacity	See Cond. 4.C	33.1-15-03
			Hours of Operation	See Condition 1, Footnote B	40 CFR 63, Subpart ZZZZ
Diesel-fired emergency fire pump engine	UEP87	UEP87	Opacity	See Cond. 4.C	33.1-15-03
			Hours of Operation	See Condition 1, Footnote B	40 CFR 63, Subpart ZZZZ
8.1 x 10 ⁶ Btu/hr (nominal) utility building heater	UEP84	UEP84	PM	0.021 lb/hr	PTC 2/26/97
			PM ₁₀	0.021 lb/hr	PTC 2/26/97
			SO ₂	0.004 lb/hr	PTC 2/26/97
			NO _x	0.300 lb/hr	PTC 2/26/97
			CO	0.143 lb/hr	PTC 2/26/97
			Opacity	See Cond. 4.C	33.1-15-03

Emission Unit Description	EU	EP	Pollutant/Parameter	Emission/Parameter Limit ^A	NDAC Applicable Requirement
191.4 x 10 ⁶ Btu/hr standby boiler	UEP85	UEP85	PM	0.57 lb/hr	PTC 2/26/97
			PM ₁₀	0.57 lb/hr	PTC 2/26/97
			SO ₂	0.11 lb/hr	PTC 2/26/97
			NO _x	53.6 lb/hr	PTC00001
			CO	7.66 lb/hr	PTC 2/26/97
			VOC	1.03 lb/hr	PTC09009
			HAP	0.35 lb/hr	PTC09009
			Opacity	See Cond. 4.C	33.1-15-03
			Hours of Operation	1,800 hours (12-month rolling total)	PTC 2/26/97
3,000-gallon chemical storage tank	REP49	REP49	Fuel Flow	See Cond. 4.B	PTC 2/26/97
			SO ₂	0.250 lb/hr	PTC 2/26/97

A Compliance requirement based on a 1-hr average unless otherwise noted

B FEP20 & FEP21 combined.

C When biogas from the wastewater flare (WEP56) is being routed as fuel to the thermal oxidizer.

- B. The total heat input for the 191.4 x 10⁶ Btu/hr standby boiler EU UEP85 and the 245 x 10⁶ Btu/hr boiler EU UEP53, as determined by the fuel flow to each boiler shall not exceed 245 x 10⁶ Btu/hr combined.

Applicable Requirement: PTC 2/26/97

- C. All emission units - Twenty percent opacity (six-minute average), except that a maximum of forty percent (six-minute average) is permissible for not more than one six-minute period per hour. This standard applies at all times.

Applicable Requirement: NDAC 33.1-15-03-02

- D. EU UEP53 (245 x 10⁶ Btu/hr Boiler) - In addition to the opacity limit specified in Condition 4.C, twenty percent (six-minute average), except that a maximum of twenty-seven percent (six-minute average) is permissible for not more than one six-minute period per hour. This standard does not apply during startup, shutdown and malfunction.

Applicable Requirements: NDAC 33.1-15-12, Subparts A and Db

- E. EU WEP56 (Wastewater Flare) - Twenty percent opacity (six-minute average), except that a maximum of sixty percent opacity is permissible for not more than one six-minute period per hour. This standard applies at all times.

Applicable Requirement: NDAC 33.1-15-03-03.1

- F. Air Toxics Emission Limits (State Enforceable Only):

Emission Limit Description	EU	EP	Pollutant	Emission Limit	NDAC Applicable Requirement
Two hydrochloric acid (HCl) storage tanks 23,691 gallons each	REP48	REP48	HCl	0.005 lb/hr total (1-hr avg)	PTC 6/2/95
3,000-gallon chemical storage tank	REP49	REP49	HCl	0.005 lb/hr (1-hr avg)	PTC 5/29/96

5. Monitoring Requirements and Conditions:

- A. Requirements:

Emission Unit Description	EU	Pollutant/Parameter	Monitoring Requirement (Method)	Condition Number	NDAC Applicable Requirement
Grain unloading	CEP1	PM/PM ₁₀ /Opacity	CAM	5.B.14	33.1-15-14-06.10
Steep tanks	MEP12	SO ₂	CAM	5.B.14	33.1-15-14-06.10
Millhouse tanks	MEP13	SO ₂	CAM	5.B.14	33.1-15-14-06.10
Feedhouse tanks	FEP18	SO ₂	CAM	5.B.14	33.1-15-14-06.10
Thermal oxidizer	FEP20	PM/PM ₁₀ /Opacity	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		SO ₂	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		NO _x	Emissions Test	5.B.7	33.1-15-14-06.5.a(3)(a)
		CO	Emissions Test	5.B.7	33.1-15-14-06.5.a(3)(a)
		Temperature	Recordkeeping	5.B.15	PTC09009

Emission Unit Description	EU	Pollutant/Parameter	Monitoring Requirement (Method)	Condition Number	NDAC Applicable Requirement
Gluten dryer	FEP21	PM/PM ₁₀ /Opacity	Recordkeeping	5.B.9	PTC09009
		SO ₂	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		NO _x	Emissions Test	5.B.7	33.1-15-14-06.5.a(3)(a)
		HAP	Recordkeeping	5.B.15	PTC09009
		Scrubber flow, pH & scrubber pressure drop	Recordkeeping	5.B.15	PTC09009
		CO	Emissions Test	5.B.7	33.1-15-14-06.5.a(3)(a)
		VOC	Recordkeeping	5.B.15	33.1-15-14-06.5.a(3)(a)
Fiber pellet cooler	FEP26	PM/PM ₁₀ /Opacity	CAM	5.B.14	33.1-15-14-06.10
Carbon regeneration furnace	REP41	PM/PM ₁₀ /Opacity	O&M/Reagent Flow Observations	5.B.3 & 5.B.5	33.1-15-14-06.5.a(3)(a)
		SO ₂	O&M/pH Readings/ Reagent Flow Observations	5.B.3, 5.B.6 & 5.B.5	33.1-15-14-06.5.a(3)(a)
		NO _x	Emissions Test	5.B.7	33.1-15-14-06.5.a(3)(a)
		VOC	Recordkeeping	5.B.15	PTC09009
		Temperature	Recordkeeping	5.B.15	PTC09009
		HAP	Recordkeeping	5.B.15	PTC09009
		CO	Recordkeeping	5.B.15	PTC09009

Emission Unit Description	EU	Pollutant/Parameter	Monitoring Requirement (Method)	Condition Number	NDAC Applicable Requirement
245 x 10 ⁶ Btu/hr main boiler	UEP53	PM/PM ₁₀	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		SO ₂	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		NO _x	Alternative Monitoring Plan (PEMS), Emissions Test (RATA)	5.B.1, 5.B.2 & 5.B.7	33.1-15-14-06.5.a(3)(a) & 33.1-15-12, Subpart Db
		CO	Emissions Test	5.B.7	33.1-15-14-06.5.a(3)(a)
		Opacity	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a) & 33.1-15-12, Subpart Db
		O ₂	PEMS	5.B.1, 5.B.10 & 5.B.11	33.1-15-14-06.5.a(3)(a) & 33.1-15-12, Subpart Db
		Fuel Flow	Recordkeeping	5.B.12	PTC 6/2/95
Wastewater flare	WEP56	PM/PM ₁₀ / Opacity	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		SO ₂	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		NO _x	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		CO	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
Germ dryer cooler	FEP77	PM/PM ₁₀ / Opacity	O&M/Pressure Drop Readings	5.B.3 & 5.B.4	33.1-15-14-06.5.a(3)(a)
Diesel engine driven emergency generator	UEP78	Opacity	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		Hours of Operation	Recordkeeping	5.B.13	40 CFR 63, Subpart ZZZZ & 33.1-15-14-06.5.a(3)(a)
Diesel-fired emergency fire pump engine	UEP87	Opacity	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		Hours of Operation	Recordkeeping	5.B.13	40 CFR 63, Subpart ZZZZ & 33.1-15-14-06.5.a(3)(a)
Fiber bin and pellet bin	FEP80	PM/PM ₁₀ / Opacity	CAM	5.B.14	33.1-15-14-06.10
Germ Fiber cooler	FEP81	PM/PM ₁₀ / Opacity	O&M/Visible Emissions (VE) Observations	5.B.3 & 5.B.8	33.1-15-14-06.5.a(3)(a)

Emission Unit Description	EU	Pollutant/Parameter	Monitoring Requirement (Method)	Condition Number	NDAC Applicable Requirement
191.4 x 10 ⁶ Btu/hr standby boiler	UEP85	PM/PM ₁₀ /Opacity	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		SO ₂	Recordkeeping	5.B.9	33.1-15-14-06.5.a(3)(a)
		NO _x	Emissions Test	5.B.7	33.1-15-14-06.5.a(3)(a)
		CO	Emissions Test	5.B.7	33.1-15-14-06.5.a(3)(a)
		Fuel Flow	Recordkeeping	5.B.12	PTC 2/26/97
		Hours of Operation	Recordkeeping	5.B.13	33.1-15-14-06.5.a(3)(a)
3,000-gallon chemical storage tank	REP49	SO ₂	Recordkeeping	5.B.16	33.1-15-14-06.5.a(3)(a)

B. Monitoring Conditions

- 1) The monitoring shall be in accordance with the following applicable requirements of Chapter 33.1-15-12 of the North Dakota Air Pollution Control Rules:
 - a) NDAC 33.1-15-12-02, Subpart A, §60.13, Monitoring Requirements:
 - b) NDAC 33.1-15-12-02, Subpart Db, §60.47b, Emission Monitoring for Sulfur Dioxide.
 - c) NDAC 33.1-15-12-02, Subpart Db, §60.48b Emission Monitoring for Particulate Matter and Nitrogen Oxides.
- 2) PEMS: The NO_x lb/10⁶ Btu and NO_x lb/hr emission rate for the 245 x 10⁶ Btu/hr boiler (EU UEP53) shall be predicted using the NO_x alternative monitoring plan in Attachment A of this permit. The PEMS shall be certified to comply with the applicable requirements of 40 CFR 60, Appendix B, Performance Specification 16. A relative accuracy test audit (RATA) shall be conducted twice during the term of the permit on the nitrogen oxides PEMS in accordance with the applicable procedures in 40 CFR 60, Appendix B, Performance Specification 16. The first test shall be conducted within two years of issuance of the renewal permit and the second test shall be conducted no sooner than two years after the previous test.
- 3) The permittee shall maintain and operate air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. The manufacturer's recommended Operations and Maintenance (O&M) procedures, or a site-specific O&M procedure (developed from the manufacturer's recommended O&M

procedures), shall be followed to assure proper operation and maintenance of the equipment. The permittee shall have the O&M procedures available on site and provide the Department with a copy when requested.

- 4) Once per week in which the emission unit (EU FEP77) is operated, a pressure drop reading shall be taken and recorded. If the pressure drop reading is outside the pressure drop limits outlined in the Pressure Drop Limits table below, the permittee must investigate the problem within eight hours. Any problems that are discovered must be corrected as soon as possible. If correction of the problem is expected to take longer than 24 hours, the permittee shall follow procedures as outlined in Condition 8.G. Following corrective maintenance, a pressure drop reading shall be made.

Pressure Drop Limits

Emission Unit Description	EU	Pressure Drop Limits
Germ Dryer Cooler	FEP77	7.0 ± 4.0 inches W.C.

All investigations of malfunctions and pressure drops shall be recorded. The permittee shall comply with the visible emissions and particulate emission limits in Condition 4 (emission limits) and nothing in this condition shall be construed as authorizing otherwise.

- 5) For EU REP41 (carbon regeneration furnace), once per day an observation of the reagent flow switch and system shall be made and recorded to confirm reagent flow to the scrubber.

If a malfunction of flow is observed, the permittee must investigate the problem within eight hours. Any problems that are discovered must be corrected as soon as possible. If the correction of the malfunction is expected to take longer than 24 hours, the permittee shall follow procedures as outlined in Condition 8.G.

All investigations of malfunctions shall be recorded. The permittee shall comply with the visible emissions, particulate and SO₂ emissions limits in Condition 4 (emission and opacity limits) and nothing in this condition shall be construed as authorizing otherwise.

- 6) For EU REP41 (Carbon Regeneration Furnace), once per week, a pH level reading of the reagent shall be taken and recorded. If the pH level reading is five or less, the permittee must investigate the problem within eight hours. Any problems that are discovered must be corrected as soon as possible. If correction of the problem is expected to take longer than 24 hours, the permittee shall follow procedures as outlined in Condition 8.G. Following corrective maintenance, a pH level reading shall be taken.

All investigations of malfunctions and pH level readings shall be recorded. The permittee shall comply with the SO₂ emission limit in Condition 4 (emission limits) and nothing in this condition shall be construed as authorizing otherwise.

- 7) For EU FEP20, FEP21, REP41, UEP53 and UEP85: Twice during the term of the 5-year renewal permit, to provide a reasonable assurance of compliance, the permittee shall conduct an emissions test to measure NO_x and/or CO emissions as applicable, using EPA Reference Methods in 40 CFR 60, Appendix A or at a minimum a portable analyzer method approved by the Department. A test shall consist of three runs, with each run at least 20 minutes in length. The first test shall be conducted within two years of issuance of the renewal permit and the second test shall be conducted no sooner than two years after the previous test.

In addition, the manufacturer's recommended operations and maintenance (O&M) procedures, or a site-specific O&M procedure (developed from the manufacturer's recommended O&M procedures), shall be followed to assure proper operation and maintenance of the emission unit. The permittee shall have the O&M procedures available on-site and provide the Department with a copy when requested.

For EU UEP85 (standby boiler) an emissions test as outlined above shall be conducted when this unit has operated more than 500 hours in a calendar year.

- 8) For EU FEP81 (~~fiber~~^{germ} cooler cyclone), once per week in which the emission unit is operated a company representative (need not be certified) shall observe the emission point. If no visible emissions are observed, the date and time shall be recorded.

If visible emissions are observed, the permittee must investigate the problem within eight hours. Any problems that are discovered must be corrected as soon as possible. If the correction of the emissions is expected to take longer than 24 hours, the permittee shall follow procedures as outlined in Condition 8.G. Following corrective maintenance, a visible emissions observation shall be made.

All investigations of malfunctions and visible emissions shall be recorded. The permittee shall comply with the visible emissions and particulate emissions limits in Condition 4 (emission limits) and nothing in this condition shall be construed as authorizing otherwise.

- 9) For purposes of compliance monitoring, burning of fuel as outlined in Condition 2 shall be considered credible evidence of compliance with any applicable opacity, PM/PM₁₀ and SO₂ emission limit. However, results from tests conducted in accordance with the test methods in 40 CFR 50, 51, 60, 61, or 75 will take precedence over burning of gaseous fuel as outlined in Condition 2 for evidence of compliance or noncompliance with any applicable opacity, PM/PM₁₀, and SO₂ emission limit in the event of enforcement action. This condition also applies to NO_x and CO emissions for the wastewater flare (EU WEP56).
- 10) The Department may require additional performance audits of the PEMS equipment.
- 11) When NO_x emission data are not obtained because of predictive emissions monitoring system (O₂) breakdowns, repairs, calibration checks and zero and span adjustments, emission data will be obtained by using standby monitoring systems, Method 7, Method

7A, or other approved reference methods to provide emission data for a minimum of 75 percent of the operating hours in each steam generating units operating day, in at least 22 out of 30 successive steam generating unit operating days.

- 12) The flow (fuel input) to both the 245×10^6 Btu/hr main boiler (EU UEP53) and the 191.4×10^6 Btu/hr standby boiler (EU UEP85) shall be monitored by a flow meter and recorded daily to demonstrate compliance with Condition 4.B.
- 13) A log shall be kept of the total hours of operation on a calendar year basis for engines. Records shall be maintained to differentiate annual emergency vs. non-emergency/maintenance/etc. hours of operation.
- 14) Monitoring for the emission unit shall be conducted in accordance with the Compliance Assurance Monitoring (CAM) plan in Attachment B of this permit. The measured indicators for the emissions units subject to CAM are summarized as follows:

Summary of Indicators

Emission Unit (Description)	Control	Indicator	Indicator Range	Frequency
CEP 1 (Grain Unloading)	Baghouse (PM/PM ₁₀)	Pressure Drop	0.075 to 3.0 in H ₂ O	Once per 24-hour period
		Visible Emissions Observations	No Visible Emissions	Once per week
FEP80 (Fiber Bin and Pellet Bin)	Baghouse (PM/PM ₁₀)	Pressure Drop	0 to 10.0 in H ₂ O	Once per 24-hour period
		Visible Emissions Observations	No Visible Emissions	Once per week
FEP26 (Fiber Pellet Cooler)	Cyclone (PM/PM ₁₀)	Visible Emissions Observations	No Visible Emissions	Once per week
MEP12 (Steep Tanks)	Caustic Scrubber (SO ₂)	Level of pH	>5.5	Continuously
		Pressure Drop	1.5 to 15.0 in H ₂ O	Once per 24-hour period
MEP13 (Millhouse Tanks)	Caustic Scrubber (SO ₂)	Level of pH	>5.5	Continuously
		Pressure Drop	1.5 to 15.0 in H ₂ O	Once per 24-hour period
FEP18 (Feedhouse Tanks)	Caustic Scrubber (SO ₂)	Level of pH	>5.5	Continuously
		Pressure Drop	1.0 to 10.0 in H ₂ O	Once per 24-hour period

- 15) For EU REP41 (Carbon Regeneration Furnace) temperature, EU FEP20 (Thermal Oxidizer) temperature, and EU FEP21 (Gluten Dryer), scrubber flow must be recorded for 3-hour average. For EU FEP21 (Gluten Dryer) scrubber pH and pressure drop must be recorded for a daily average. If readings are out of specification, the permittee must investigate the problem within eight hours. Any problems that are discovered must be corrected as soon as possible. If correction of the problem is expected to take longer than 24 hours, the permittee shall follow procedures as outlined in Condition 8.G.
- 16) For EU REP49 (3,000-gallon chemical storage tank), once per week, an observation of the scrubber water flow shall be taken and recorded. Any problems that are discovered must be corrected as soon as possible. If correction of the problem is expected to take longer than 24 hours, the permittee shall follow procedures as outlined in Condition 8.G. Following corrective maintenance, a flow observation shall be taken.

All investigations of malfunctions and scrubber water flow shall be recorded. The permittee shall comply with the SO₂ emission limit in Condition 4 (emission limits) and nothing in this condition shall be construed as authorizing otherwise.

6. Recordkeeping Requirements:

- A. The permittee shall maintain compliance monitoring records as outlined in the Monitoring Records table that include the following information.
 - 1) The date, place (as defined in the permit) and time of sampling or measurement.
 - 2) The date(s) testing was performed.
 - 3) The company, entity, or person that performed the testing.
 - 4) The testing techniques or methods used.
 - 5) The results of such testing.
 - 6) The operating conditions that existed at the time of sampling or measurement.
 - 7) The records of quality assurance for emissions measuring systems including but not limited to quality control activities, audits and calibration drifts as required by the applicable test method.
 - 8) A copy of all field data sheets from the emissions testing.
 - 9) A record shall be kept of all major maintenance activities conducted on the emission units or air pollution control equipment.

10) Records shall be kept as to the type of fuel usage

Applicable Requirement: NDAC 33.1-15-14-06.5.a(3)(b)[1]

Monitoring Records

Emission Unit Description	EU	Pollutant/Parameter	Compliance Monitoring Record
Grain unloading	CEP1	PM/PM ₁₀ /Opacity	CAM Data
Steep tanks	MEP12	SO ₂	CAM Data
Millhouse tanks	MEP13	SO ₂	CAM Data
Feedhouse tanks	FEP18	SO ₂	CAM Data
Thermal oxidizer	FEP20	PM/PM ₁₀ /Opacity	Type of Fuel Usage
		SO ₂	Type of Fuel Usage
		NO _x	Emissions Test Data
		CO	Emissions Test Data
		Temperature	Temperature Reading Data
Gluten dryer	FEP21	PM/PM ₁₀ /Opacity	Type of Fuel Usage
		SO ₂	Type of Fuel Usage
		NO _x	Emissions Test Data
		CO	Emissions Test Data
		VOC	Scrubber flow, pressure drop & pH
		HAP	Scrubber flow, pressure drop & pH
Fiber pellet cooler	FEP26	PM/PM ₁₀ /Opacity	CAM Data
Carbon regeneration furnace	REP41	PM/PM ₁₀ /Opacity	O&M Data and Reagent Flow Observations
		SO ₂	O&M Data/pH Readings Data and Reagent Flow Observations
		NO _x	Emissions Test Data
		CO	Emissions Test Data
		VOC, HAP	Temperature Reading Data

Emission Unit Description	EU	Pollutant/Parameter	Compliance Monitoring Record
245 x 10 ⁶ Btu/hr main boiler	UEP53	PM/PM ₁₀	Type of Fuel Usage
		SO ₂	Type of Fuel Usage
		NO _x	Alternative Monitoring Plan Data and Emissions Test (RATA) Data
		CO	Emissions Test Data
		O ₂	PEMS Data
		Opacity	Type of Fuel Usage
		Fuel Flow	Fuel Flow Data
Wastewater flare	WEP56	PM/PM ₁₀ /Opacity	Type of Fuel Usage
		SO ₂	Type of Fuel Usage
		NO _x	Type of Fuel Usage
		CO	Type of Fuel Usage
Germ dryer cooler	FEP77	PM/PM ₁₀ /Opacity	O&M Data and Pressure Drop Data
Diesel engine-driven emergency generator	UEP78	Opacity	Type of Fuel Usage
		Hours of Operation	Hours of Operation Data
Diesel-fired emergency fire pump engine	UEP87	Opacity	Type of Fuel Usage
		Hours of Operation	Hours of Operation Data
Fiber bin and pellet bin	FEP80	PM/PM ₁₀ /Opacity	CAM Data
Fiber cooler	FEP81	PM/PM ₁₀ /Opacity	O&M Data and Visible Emissions Observations
191.4 x 10 ⁶ Btu/hr standby boiler fired on natural gas	UEP85	PM/PM ₁₀ /Opacity	Type of Fuel Usage
		SO ₂	Type of Fuel Usage
		NO _x	Emissions Test Data
		CO	Emissions Test Data
		Hours of Operation	Hours of Operation
		Fuel Flow	Flow Data

Germ

Emission Unit Description	EU	Pollutant/Parameter	Compliance Monitoring Record
3,000-gallon chemical storage tank	REP49	SO ₂	Scrubber Water Flow Observations

B. In addition to requirements outlined in Condition 6.A, recordkeeping for the 245 x 10⁶ Btu/hr main boiler (EU UEP53) shall be in accordance with the following applicable requirements of NDAC 33.1-15-12 of the North Dakota Air Pollution Control Rules.

- 1) NDAC 33.1-15-12-02, Subpart A, §60.7, Notification and Recordkeeping.
- 2) NDAC 33.1-15-12-02, Subpart Db, §60.496, Reporting and Recordkeeping Requirements.

Applicable Requirements: NDAC 33.1-15-12-02, Subparts A and Db

C. Recordkeeping for EU CEP1, FEP26, FEP80, MEP12, MEP13 and FEP18 shall be in accordance with NDAC 33.1-15-14-06.10, §64.9 - Reporting and Recordkeeping Requirements, Paragraph (b) General Recordkeeping Requirements.

Applicable Requirement: NDAC 33.1-15-14-06.10

D. The permittee shall retain records of all required compliance monitoring data and support information for a period of at least five years from the date of the compliance monitoring sampling, measurement, report, or application. Support information includes all calibration and maintenance records and all original strip-chart recordings/computer printouts of continuous compliance monitoring instrumentation, and copies of all reports required by the permit.

Applicable Requirement: NDAC 33.1-15-14-06-5.a(3)(b)[2]

7. **Reporting:**

A. Reporting for EU CEP1, FEP26, FEP80, MEP12, MEP13 and FEP18 shall be in accordance with NDAC 33.1-15-14-06.10, §64.9 - Reporting and Recordkeeping Requirements, Paragraph (b) General Recordkeeping Requirements.

Applicable Requirement: NDAC 33.1-15-14-06.10

B. For the 245 x 10⁶ Btu/hr main boiler (EU UEP53), reporting shall be in accordance with the following applicable requirements of Chapter 33.1-15-12 of the North Dakota Air Pollution Control Rules.

- 1) NDAC 33.1-15-12-02, Subpart A, §60.7, Notification and Recordkeeping.
- 2) NDAC 33.1-15-12-02, Subpart Db, §60.496, Reporting and Recordkeeping Requirements.

- 3) Quarterly excess emission reports for the 245 x 10⁶ Btu/hr main boiler (EU UEP53) shall be submitted by the 30th day following the end of each calendar quarter. Excess emissions are defined as emissions which exceed the emission limits for the 245 x 10⁶ Btu/hr boiler (EU UEP53) as outlined in Condition 3. Excess emissions shall be reported for the following:

<u>Parameter</u>	<u>Reporting Period</u>
NO _x lb/10 ⁶ Btu	30-day rolling average
NO _x lb/hr	1-hour average

Applicable Requirements: NDAC 33.1-15-12-02, Subparts A and D

- C. The permittee shall submit a semi-annual monitoring report for all monitoring records required under Condition 6 on forms supplied or approved by the Department. All instances of deviations from the permit must be identified in the report. A monitoring report shall be submitted within 45 days after June 30 and December 31 of each year.

Applicable Requirements: NDAC 33.1-15-14-06-5.a(3)(c)[1] and [2]

- D. The permittee shall submit an annual compliance certification report in accordance with NDAC 33.1-15-14-06.5.c(5) within 45 days after December 31 of each year on forms supplied or approved by the Department.

Applicable Requirement: NDAC 33.1-15-14-06-5.c(5)

- E. For emission units where the method of compliance monitoring is demonstrated by an EPA Test Method or a portable analyzer test, the test report shall be submitted to the Department within 60 days after completion of the test.

Applicable Requirement: NDAC 33.1-15-14-06-5.a(6)(e)

- F. The permittee shall submit an annual emission inventory report on forms supplied or approved by the Department. This report shall be submitted by March 15 of each year. Insignificant units/activities listed in this permit do not need to be included in the report.

Applicable Requirements: NDAC 33.1-15-14-06.5.a(7) and NDAC 33.1-15-23-04

8. Facility Wide Operating Conditions:

A. Ambient Air Quality Standards:

- 1) Particulate and gases. The permittee shall not emit air contaminants in such a manner or amount that would violate the standards of ambient air quality listed in Table 1 of NDAC 33.1-15-02, external to buildings, to which the general public has access.

- 2) Radioactive substances. The permittee shall not release into the ambient air any radioactive substances exceeding the concentrations specified in NDAC 33.1-10.
- 3) Other air contaminants. The permittee shall not emit any other air contaminants in concentrations that would be injurious to human health or well-being or unreasonably interfere with the enjoyment of property or that would injure plant or animal life.
- 4) Disclaimer. Nothing in any other part or section of this permit may in any manner be construed as authorizing or legalizing the emission of air contaminants in such manner that would violate the standards in Paragraphs 1), 2) and 3) of this condition.

Applicable Requirements: NDAC 33.1-15-02-04 and 40 CFR 50.1(e)

- B. **Fugitive Emissions:** The release of fugitive emissions shall comply with the applicable requirements in NDAC 33.1-15-17.

Applicable Requirement: NDAC 33.1-15-17

- C. **Open Burning:** The permittee may not cause, conduct, or permit open burning of refuse, trade waste, or other combustible material, except as provided for in Section 33.1-15-04-02 and may not conduct, cause, or permit the conduct of a salvage operation by open burning. Any permissible open burning under NDAC 33.1-15-04-02 must comply with the requirements of that section.

Applicable Requirement: NDAC 33.1-15-04

- D. **Asbestos Renovation or Demolition:** Any asbestos renovation or demolition at the facility shall comply with emission standard for asbestos in NDAC 33.1-15-13.

Applicable Requirement: NDAC 33.1-15-13-02

- E. **Requirements for Organic Compounds Gas Disposal:**

- 1) Any organic compounds, gases and vapors which are generated as wastes as the result of storage, refining or processing operations and which contain hydrogen sulfide shall be incinerated, flared or treated in an equally effective manner before being released into the ambient air.
- 2) Each flare must be equipped and operated with an automatic ignitor or a continuous burning pilot.

Applicable Requirement: NDAC 33.1-15-07-02

- F. **Rotating Pumps and Compressors:** All rotating pumps and compressors handling volatile organic compounds must be equipped and operated with properly maintained seals designed for their specific product service and operating conditions.

Applicable Requirement: NDAC 33.1-15-07-01.5

- G. **Shutdowns/Malfunction/Continuous Emission Monitoring System Failure:**

- 1) Maintenance Shutdowns. In the case of shutdown of air pollution control equipment for necessary scheduled maintenance, the intent to shut down such equipment shall be reported to the Department at least 24 hours prior to the planned shutdown provided that the air contaminating source will be operated while the control equipment is not in service. Such prior notice shall include the following:
 - a) Identification of the specific facility to be taken out of service as well as its location and permit number.
 - b) The expected length of time that the air pollution control equipment will be out of service.
 - c) The nature and estimated quantity of emissions of air pollutants likely to be emitted during the shutdown period.
 - d) Measures, such as the use of off-shift labor and equipment, that will be taken to minimize the length of the shutdown period.
 - e) The reasons that it would be impossible or impractical to shutdown the source operation during the maintenance period.
 - f) Nothing in this subsection shall in any manner be construed as authorizing or legalizing the emission of air contaminants in excess of the rate allowed by this article or a permit issued pursuant to this article.

Applicable Requirement: NDAC 33.1-15-01-13.1

- 2) Malfunctions.
 - a) When a malfunction in any installation occurs that can be expected to last longer than 24 hours and cause the emission of air contaminants in violation of this article or other applicable rules and regulations, the person responsible for such installation shall notify the Department of such malfunction as soon as possible during normal working hours. The notification must contain a statement giving all pertinent facts, including the estimated duration of the breakdown. The Department shall be notified when the condition causing the malfunction has been corrected.

- b) Immediate notification to the Department is required for any malfunction that would threaten health or welfare or pose an imminent danger. During normal working hours the Department can be contacted at 701-328-5188. After hours the Department can be contacted through the 24-hour state radio emergency number 1-800-472-2121. If calling from out of state, the 24-hour number is 701-328-9921.
- c) Unavoidable Malfunction. The owner or operator of a source who believes any excess emissions resulted from an unavoidable malfunction shall submit a written report to the Department which includes evidence that:
- [1] The excess emissions were caused by a sudden, unavoidable breakdown of technology that was beyond the reasonable control of the owner or operator.
 - [2] The excess emissions could not have been avoided by better operation and maintenance, did not stem from an activity or event that could have been foreseen and avoided, or planned for.
 - [3] To the extent practicable, the source maintained and operated the air pollution control equipment and process equipment in a manner consistent with good practice for minimizing emissions, including minimizing any bypass emissions.
 - [4] Any necessary repairs were made as quickly as practicable, using off-shift labor and overtime as needed and possible.
 - [5] All practicable steps were taken to minimize the potential impact of the excess emissions on ambient air quality.
 - [6] The excess emissions are not part of a recurring pattern that may have been caused by inadequate operation or maintenance, or inadequate design of the malfunctioning equipment.

The report shall be submitted within 30 days of the end of the calendar quarter in which the malfunction occurred or within 30 days of a written request by the Department, whichever is sooner.

The burden of proof is on the owner or operator of the source to provide sufficient information to demonstrate that an unavoidable equipment malfunction occurred. The Department may elect not to pursue enforcement action after considering whether excess emissions resulted from an unavoidable equipment malfunction. The Department will evaluate, on a case-by-case basis, the information submitted by the owner or operator to determine whether to pursue enforcement action.

Applicable Requirement: NDAC 33.1-15-01-13.2

- 3) Continuous Emission Monitoring System Failures. When a failure of a continuous emission monitoring system occurs, an alternative method for measuring or estimating emissions must be undertaken as soon as possible. The owner or operator of a source that uses an alternative method shall have the burden of demonstrating that the method is accurate. Timely repair of the emission monitoring system must be made. The provisions of this subsection do not apply to sources that are subject to monitoring requirements in Chapter 33.1-15-21 (40 CFR 75, Acid Rain Program).

Applicable Requirement: NDAC 33.1-15-01-13.3

H. **Noncompliance Due to an Emergency:** The permittee may seek to establish that noncompliance with a technology-based emission limitation under this permit was due to an emergency. To do so, the permittee shall demonstrate the affirmative defense of emergency through properly signed, contemporaneous operating logs, or other relevant evidence that:

- 1) An emergency occurred, and that the permittee can identify the cause(s) of the emergency;
- 2) The permitted facility was at the time being properly operated;
- 3) During the period of the emergency the permittee took all reasonable steps to minimize levels of emissions that exceeded the emissions standards, or other requirements in this permit; and
- 4) The permittee submitted notice of the emergency to the Department within one working day of the time when emission limitations were exceeded longer than 24-hours due to the emergency. This notice must contain a description of the emergency, any steps taken to mitigate emissions, and corrective actions taken. Those emergencies not reported within one working day, as well as those that were, will be included in the semi-annual report.

In any enforcement proceeding, the permittee seeking to establish the occurrence of an emergency has the burden of proof.

Technology-based emission limits are those established on the basis of emission reductions achievable with various control measures or process changes (e.g., a New Source Performance Standard) rather than those established to attain a health-based air quality standard.

An “emergency” means any situation arising from sudden and reasonably unforeseeable events beyond the control of this source, including acts of God, which requires immediate corrective action to restore normal operation, and that causes this source to exceed a technology-based emission limitation under this permit, due to unavoidable increases in emissions attributable to the emergency. An emergency shall not include noncompliance to the extent caused by improperly designed equipment, lack of preventative maintenance, careless or improper operation, or operator error.

Applicable Requirement: NDAC 33.1-15-14-06.5.g

- I. **Air Pollution from Internal Combustion Engines:** The permittee shall comply with all applicable requirements of NDAC 33.1-15-08-01 – Internal Combustion Engine Emissions Restricted.

Applicable Requirement: NDAC 33.1-15-08-01

- J. **Prohibition of Air Pollution:**

- 1) The permittee shall not permit or cause air pollution, as defined in NDAC 33.1-15-01-04.
- 2) Nothing in any other part of this permit or any other regulation relating to air pollution shall in any manner be construed as authorizing or legalizing the creation or maintenance of air pollution.

Applicable Requirement: NDAC 33.1-15-01-15

- K. **Performance Tests:**

- 1) The Department may reasonably require the permittee to make or have made tests, at a reasonable time or interval, to determine the emission of air contaminants from any source, for the purpose of determining whether the permittee is in violation of any standard or to satisfy other requirements of NDCC 23.1-06. All tests shall be made, and the results calculated in accordance with test procedures approved or specified by the Department including the North Dakota Department of Environmental Quality Emission Testing Guideline. All tests shall be conducted by reputable, qualified personnel. The Department shall be given a copy of the test results in writing and signed by the person responsible for the tests.
- 2) The Department may conduct tests of emissions of air contaminants from any source. Upon request of the Department, the permittee shall provide necessary and adequate access into stacks or ducts and such other safe and proper sampling and testing facilities, exclusive of instruments and sensing devices, as may be necessary for proper determination of the emission of air contaminants.

Applicable Requirement: NDAC 33.1-15-01-12

- 3) Except for sources subject to 40 CFR 63, the permittee shall notify the Department by submitting a Proposed Test Plan, or its equivalent, at least 30 calendar days in advance of any tests of emissions of air contaminants required by the Department. The permittee shall notify the Department at least 60 calendar days in advance of any performance testing required under 40 CFR 63, unless otherwise specified by the subpart. If the permittee is unable to conduct the performance test on the scheduled date, the permittee shall notify the Department as soon as practicable when conditions warrant and shall coordinate a new test date with the Department.

Failure to give the proper notification may prevent the Department from observing the test. If the Department is unable to observe the test because of improper notification, the test results may be rejected.

Applicable Requirements: NDAC 33.1-15-14-06.5.a(3)(a), NDAC 33.1-15-12-02 Subpart A (40 CFR 60.8), NDAC 33.1-15-13-01.2 Subpart A (40 CFR 61.13), NDAC 33.1-15-22-03 Subpart A (40 CFR 63.7)

- L. **Pesticide Use and Disposal:** Any use of a pesticide or disposal of surplus pesticides and empty pesticide containers shall comply with the requirements in NDAC 33.1-15-10.

Applicable Requirements: NDAC 33.1-15-10-01 and NDAC 33.1-15-10-02

- M. **Air Pollution Emergency Episodes:** When an air pollution emergency episode is declared by the Department, the permittee shall comply with the requirements in NDAC 33.1-15-11.

Applicable Requirements: NDAC 33.1-15-11-01 through NDAC 33.1-15-11-04

- N. **Stratospheric Ozone Protection:** The permittee shall comply with any applicable standards for recycling and emissions reduction pursuant to 40 CFR 82, Subpart F, except as provided for MVACs in Subpart B:

- 1) Persons opening appliances for maintenance, service, repair, or disposal must comply with the required practices pursuant to Section 82.156.
- 2) Equipment used during the maintenance, service, repair, or disposal of appliances must comply with the standards for recycling and recovery equipment pursuant to Section 82.158.
- 3) Persons performing maintenance, service, repair, or disposal of appliances must be certified by an approved technician certification program pursuant to Section 82.161.
- 4) Persons owning commercial or industrial process refrigeration equipment must comply with the leak repair requirements pursuant to Section 82.156.

Applicable Requirement: 40 CFR 82

- O. **Chemical Accident Prevention:** The permittee shall comply with all applicable requirements of Chemical Accident Prevention pursuant to 40 CFR 68. The permittee shall comply with the requirements of this part no later than the latest of the following dates:

- 1) Three years after the date on which a regulated substance is first listed under this part; or
- 2) The date on which a regulated substance is first present above a threshold quantity in a process.

Applicable Requirement: 40 CFR 68

- P. **Air Pollution Control Equipment:** The permittee shall maintain and operate air pollution control equipment in a manner consistent with good air pollution control practice for minimizing emissions. The manufacturer's recommended Operations and Maintenance (O&M) procedures, or a site-specific O&M procedure developed from the manufacturer's recommended O&M procedures, shall be followed to assure proper operation and maintenance of the equipment. The permittee shall have the O&M procedures available onsite and provide the Department with a copy when requested.

Applicable Requirement: NDAC 33.1-15-14-06.5.b(1)

- Q. **Prevention of Significant Deterioration of Air Quality** (40 CFR 52.21 as incorporated by NDAC Chapter 33.1-15-15): If this facility is classified as a major stationary source under the Prevention of Significant Deterioration of Air Quality (PSD) rules, a Permit to Construct must be obtained from the Department for any project which meets the definition of a "major modification" under 40 CFR 52.21(b)(2).

If this facility is classified as a major stationary source under the PSD rules and the permittee elects to use the method specified in 40 CFR 52.21(b)(41)(ii)(a) through (c) for calculating the projected actual emissions of a proposed project, then the permittee shall comply with all applicable requirements of 40 CFR 52.21(r)(6).

Applicable Requirement: NDAC 33.1-15-15-01.2

9. **General Conditions:**

- A. **Annual Fee Payment:** The permittee shall pay an annual fee, for administering and monitoring compliance, which is determined by the actual annual emissions of regulated contaminants from the previous calendar year. The Department will send a notice, identifying the amount of the annual permit fee, to the permittee of each affected installation. The fee is due within 60 days following the date of such notice. Any source that qualifies as a "small business" may petition the Department to reduce or exempt any fee required under this section. Failure to pay the fee in a timely manner or submit a certification for exemption may cause this Department to initiate action to revoke the permit.

Applicable Requirements: NDAC 33.1-15-14-06.5.a(7) and NDAC 33.1-15-23-04

- B. **Permit Renewal and Expiration:** This permit shall be effective from the date of its issuance for a fixed period of five years. The permittee's right to operate this source terminates with the expiration of this permit unless a timely and complete renewal application is submitted at least six

months, but no more than 18 months, prior to the date of permit expiration. The Department shall approve or disapprove the renewal application within 60 days of receipt. Unless the Department requests additional information or otherwise notifies the applicant of incompleteness, the application shall be deemed complete. For timely and complete renewal applications for which the Department has failed to issue or deny the renewal permit before the expiration date of the previous permit, all terms and conditions of the permit, including any permit shield previously granted shall remain in effect until the renewal permit has been issued or denied. The application for renewal shall include the current permit number, description of any permit revisions and off-permit changes that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term.

Applicable Requirements: NDAC 33.1-15-14-06.4 and NDAC 33.1-15-14-06.6

- C. **Transfer of Ownership or Operation:** This permit may not be transferred except by procedures allowed in Chapter 33.1-15-14 and is to be returned to the Department upon the destruction or change of ownership of the source unit(s), or upon expiration, suspension or revocation of this permit. A change in ownership or operational control of a source is treated as an administrative permit amendment if no other change in the permit is necessary and provided that a written agreement containing a specific date for transfer of permit responsibility, coverage, and liability between the current and new permittee has been submitted to the Department.

Applicable Requirement: NDAC 33.1-15-14-06.6.d

- D. **Property Rights:** This permit does not convey any property rights of any sort, or any exclusive privilege.

Applicable Requirement: NDAC 33.1-15-14-06.5.a(6)(d)

- E. **Submissions:**

- 1) Reports, test data, monitoring data, notifications, and requests for renewal shall be submitted to:

North Dakota Department of Environmental Quality
Division of Air Quality
918 E Divide Avenue, 2nd Floor
Bismarck, ND 58501-1947

- 2) Any document submitted shall be certified as being true, accurate, and complete by a responsible official.

Applicable Requirement: NDAC 33.1-15-14-06.4.d

- F. **Right of Entry:** Any duly authorized officer, employee or agent of the North Dakota Department of Environmental Quality may enter and inspect any property, premise or place listed on this permit or where records are kept concerning this permit at any reasonable time for the purpose of ascertaining the state of compliance with this permit and the North Dakota Air Pollution Control Rules. The Department may conduct tests and take samples of air contaminants, fuel, processing material, and other materials which affect or may affect emissions of air contaminants from any

source. The Department shall have the right to access and copy any records required by the Department's rules and to inspect monitoring equipment located on the premises.

Applicable Requirements: NDAC 33.1-15-14-06.5.c(2) and NDAC 33.1-15-01-06

- G. **Compliance:** The permittee must comply with all conditions of this permit. Any noncompliance with a federally-enforceable permit condition constitutes a violation of the Federal Clean Air Act. Any noncompliance with any State enforceable condition of this permit constitutes a violation of NDCC Chapter 23.1-06 and NDAC 33.1-15. Violation of any condition of this permit is grounds for enforcement action, for permit termination, revocation and reissuance or modification, or for denial of a permit renewal application. Noncompliance may also be grounds for assessment of penalties under the NDCC 23.1-06. It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

Applicable Requirements: NDAC 33.1-15-14-06.5.a(6)(a) and NDAC 33.1-15-14-06.5.a(6)(b)

- H. **Duty to Provide Information:** The permittee shall furnish to the Department, within a reasonable time, any information that the Department may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit, or to determine compliance with the permit. This includes instances where an alteration, repair, expansion, or change in method of operation of the source occurs. Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to keep by this permit, or for information claimed to be confidential, the permittee may furnish such recourse directly to the Department along with a claim of confidentiality. The permittee, upon becoming aware that any relevant facts were omitted, or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information. Items that warrant supplemental information submittal include, but are not limited to, changes in the ambient air boundary and changes in parameters associated with emission points (i.e., stack parameters). The permittee shall also provide additional information as necessary to address any requirements that become applicable to the source after the date a complete renewal application was submitted but prior to release of a draft permit.

Applicable Requirements: NDAC 33.1-15-14-06.5.a(6)(e), NDAC 33.1-15-14-06.6.b(3) and NDAC 33.1-15-14-06.4.b

- I. **Reopening for Cause:** The Department will reopen and revise this permit as necessary to remedy deficiencies in the following circumstances:
- 1) Additional applicable requirements under the Federal Clean Air Act become applicable to the permittee with a remaining permit term of three or more years. Such a reopening shall be completed no later than 18 months after promulgation of the applicable requirement. No such reopening is required if the effective date of the requirement is later than the expiration date of this permit.
 - 2) The Department or the United States Environmental Protection Agency determines that this permit contains a material mistake or inaccurate statements were made in establishing the emissions standards or other terms or conditions of this permit.

- 3) The Department or the United States Environmental Protection Agency determines that the permit must be revised or revoked to assure compliance with the applicable requirements.
- 4) Reopenings shall not be initiated before a notice of intent to reopen is provided to the permittee by the Department at least 30 days in advance of the date that this permit is to be reopened, except that the Department may provide a shorter time period in the case of an emergency. Proceedings to reopen and issue this permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of this permit for which cause to reopen exists. Such reopening shall be made as expeditiously as practicable.

Applicable Requirement: NDAC 33.1-15-14-06.6.f

- J. **Permit Changes:** The permit may be modified, revoked, reopened, and reissued or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any permit condition.

Applicable Requirement: NDAC 33.1-15-14-06.5.a(6)(c)

- K. **Off-Permit Changes:** A permit revision is not required for changes that are not addressed or prohibited by this permit, provided the following conditions are met:

- 1) No such change may violate any term or condition of this permit.
- 2) Each change must comply with all applicable requirements.
- 3) Changes under this provision may not include changes or activities subject to any requirement under Title IV or that are modifications under any provision of Title I of the Federal Clean Air Act.
- 4) A Permit to Construct under NDAC 33.1-15-14-02 has been issued, if required.
- 5) Before the permit change is made, the permittee must provide written notice to both the Department and Air Program (8P-AR), Office of Partnerships & Regulatory Assistance, US EPA Region 8, 1595 Wynkoop Street, Denver, CO 80202-1129, except for changes that qualify as insignificant activities in Section 33.1-15-14-06. This notice shall describe each change, the date of the change, any change in emissions, pollutants emitted, and any applicable requirement that would apply as a result.
- 6) The permittee shall record all changes that result in emissions of any regulated air pollutant subject to any applicable requirement not otherwise regulated under this permit, and the emissions resulting from those changes. The record shall reside at the permittee's facility.

Applicable Requirement: NDAC 33.1-15-14-06.6.b(3)

- L. **Administrative Permit Amendments:** This permit may be revised through an administrative permit amendment, if the revision to this permit accomplishes one of the following:

- 1) Corrects typographical errors.

- 2) Identifies a change in the name, address or phone number of any person identified in this permit or provides a similar minor administrative change at the source.
- 3) Requires more frequent monitoring or reporting by the permittee.
- 4) Allows for a change in ownership or operational control of the source where the Department determines that no other change in the permit is necessary, provided that a written agreement containing a specific date for transfer of permit responsibility, coverage and liability between the current and new permittee has been submitted to the Department.
- 5) Incorporates into the Title V permit the requirements from a Permit to Construct when the review was substantially equivalent to Title V requirements for permit issuance, renewal, reopenings, revisions and permit review by the United States Environmental Protection Agency and affected state review, that would be applicable to the change if it were subject to review as a permit modification and compliance requirements substantially equivalent to Title V requirements for permit content were contained in the Permit to Construct.
- 6) Incorporates any other type of change which the Administrator of the United States Environmental Protection Agency has approved as being an administrative permit amendment as part of the Department's approved Title V operating permit program.

Applicable Requirement: NDAC 33.1-15-14-06.6.d

M. **Minor Permit Modification:** This permit may be revised by a minor permit modification, if the proposed permit modification meets the following requirements:

- 1) Does not violate any applicable requirement.
- 2) Does not involve significant changes to existing monitoring, reporting, or recordkeeping requirements in this permit.
- 3) Does not require or change a case-by-case determination of an emission limitation or other standard, or a source-specific determination for temporary sources of ambient impacts, or a visibility or increment analysis.
- 4) Does not seek to establish or change a permit term or condition for which there is no corresponding underlying applicable requirement and that the source has assumed to avoid an applicable requirement to which the source would otherwise be subject. Such terms and conditions include a federally enforceable emissions cap assumed to avoid classification as a modification under any provision of Title I of the Federal Clean Air Act; and alternative emissions limit approved pursuant to regulations promulgated under Section 112(i)(5) of the Federal Clean Air Act.
- 5) Is not a modification under NDAC 33.1-15-12, 33.1-15-13, and 33.1-15-15 or any provision of Title I of the Federal Clean Air Act.

- 6) Is not required to be processed as a significant modification.

Applicable Requirement: NDAC 33.1-15-14-06.6.e(1)

N. **Significant Modifications:**

- 1) Significant modification procedures shall be used for applications requesting permit modifications that do not qualify as minor permit modifications or as administrative amendments. Every significant change in existing monitoring permit terms or conditions and every relaxation of reporting or recordkeeping permit terms or conditions shall be considered significant. Nothing therein shall be construed to preclude the permittee from making changes consistent with this subsection that would render existing permit compliance terms and conditions irrelevant.
- 2) Significant permit modifications shall meet all Title V requirements, including those for applications, public participation, review by affected states, and review by the United States Environmental Protection Agency, as they apply to permit issuance and permit renewal. The Department shall complete review of significant permit modifications within nine months after receipt of a complete application.

Applicable Requirement: NDAC 33.1-15-14-06.6.e(3)

- O. **Operational Flexibility:** The permittee is allowed to make a limited class of changes within the permitted facility that contravene the specific terms of this permit without applying for a permit revision, provided the changes do not exceed the emissions allowable under this permit, are not Title I modifications and a Permit to Construct is not required. This class of changes does not include changes that would violate applicable requirements; or changes to federally-enforceable permit terms or conditions that are monitoring, recordkeeping, reporting, or compliance certification requirements.

The permittee is required to send a notice to both the Department and Air Program (8P-AR), Office of Partnerships & Regulatory Assistance, US EPA Region 8, 1595 Wynkoop Street, Denver, CO 80202-1129, at least seven days in advance of any change made under this provision. The notice must describe the change, when it will occur and any change in emissions, and identify any permit terms or conditions made inapplicable as a result of the change. The permittee shall attach each notice to its copy of this permit. Any permit shield provided in this permit does not apply to changes made under this provision.

Applicable Requirement: NDAC 33.1-15-14-06.6.b(2)

- P. **Relationship to Other Requirements:** Nothing in this permit shall alter or affect the following:

- 1) The provisions of Section 303 of the Federal Clean Air Act (emergency orders), including the authority of the administrator of the United States Environmental Protection Agency under that section.
- 2) The liability of an owner or operator of a source for any violation of applicable requirements prior to or at the time of permit issuance.

- 3) The ability of the United States Environmental Protection Agency to obtain information from a source pursuant to Section 114 of the Federal Clean Air Act.
- 4) Nothing in this permit shall relieve the permittee of the requirement to obtain a Permit to Construct.

Applicable Requirements: NDAC 33.1-15-14-06.3 and NDAC 33.1-15-14-06.5.f(3)(a), (b) and (d)

- Q. **Severability Clause:** The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit, shall not be affected thereby.

Applicable Requirement: NDAC 33.1-15-14-06.5.a(5)

- R. **Circumvention:** The permittee shall not cause or permit the installation or use of any device of any means which conceals or dilutes an emission of air contaminants which would otherwise violate this permit.

Applicable Requirement: NDAC 33.1-15-01-08

10. **State Enforceable Only Conditions (not Federally enforceable):**

- A. **General Odor Restriction:** The permittee shall not discharge into the ambient air any objectionable odorous air contaminant which exceeds the limits established in NDAC 33.1-15-16.

Applicable Requirement: NDAC 33.1-15-16

- B. **Hydrogen Sulfide Restriction:** The permittee shall not discharge into the ambient air hydrogen sulfide (H₂S) in concentrations that would be objectionable on land owned or leased by the complainant or in areas normally accessed by the general public. For the purpose of complaint resolution, two samples with concentrations greater than 0.05 parts per million (50 parts per billion) sampled at least 15 minutes apart within a two-hour period and measured in accordance with Section 33.1-15-16-04 constitute a violation. An ambient air analyzer designed for monitoring hydrogen sulfide (H₂S) is the method used for determining the concentrations of emissions at the point of measurement, or other instrumental methods as approved by the Department.

Applicable Requirements: NDAC 33.1-15-16-02.1 and NDAC 33.1-15-16-04

Attachment A

**NO_x Alternative
Monitoring Plan**

NO_x Alternative Monitoring Plan
 Predictive Emission Monitoring System (PEMS)
 NO_x Emissions
 245 x 10⁶ Btu/hr Boiler (EU UEP53)

The permittee shall use the following models/equations to predict NO_x emissions for the 245 x 10⁶ Btu/hr boiler (EU UEP53) as noted in the *Operations Monitoring program to Predict NO_x Emissions for the Main Boiler (UEP53) at Cargill, Inc. Wahpeton, ND June 11-August 5, 1998 Mostardi Platt document pages 11 and 12.*

1. During startup/shutdown periods (steam flow < 50 kpph), a NO_x emission rate of **0.82 lb/10⁶ Btu** shall be recorded and the NO_x lb/hr shall be calculated as follows:

$$\text{NO}_x \text{ lb/hr} = (0.82 \text{ lb}/10^6 \text{ Btu}) (\text{Heat Input}, 10^6 \text{ Btu/hr})$$

2. During other periods, the following equations shall be used to calculate NO_x emissions:

If steam flow is > 50 kpph and steam flow is ≤ 95 kpph, then:

$$\begin{aligned} \text{NO}_x \text{ (ppmvd at 3\% O}_2\text{)} = & 42.9 \\ & +0.122379199*(\text{Stack Temperatures}, ^\circ\text{F}) \\ & -0.089137751*(\text{Steam Flow}, \text{kpph}) \\ & -4.04837^{-05}*(\text{Fuel Flow}, \text{scfh}) \end{aligned}$$

If steam flow is > 95 kpph, then:

$$\begin{aligned} \text{NO}_x \text{ (ppmvd at 3\% O}_2\text{)} = & \del{18.57466122} \\ & \del{+0.134988425*(\text{Stack Temperature}, ^\circ\text{F})} \\ & \del{+2611.841913/(\text{Steam Flow}, \text{kpph})} \\ & \del{+0.133257922*(\text{Steam Flow}, \text{kpph})} \\ & \del{-0.119399784*(\text{Exhaust Temperature}, ^\circ\text{F})} \\ & \del{+9.25708^{-05}*(\text{Fuel Flow}, \text{scfh})} \\ & \del{+1.622941621*(\text{In Situ Boiler O}_2\text{, \%})} \\ & \del{+1452092.629*(\text{Fuel Flow}, \text{scfh})} \end{aligned}$$

Please see attached Predictive Monitoring System (PEMS) document for revisions.

$$\text{NO}_x \text{ (lb}/10^6 \text{ Btu)} = \text{NO}_x, \text{ (ppmvd at 3\% O}_2\text{)}*(0.001214271)$$

$$\text{NO}_x \text{ (lb/hr)} = \text{NO}_x, \text{ lb}/10^6 \text{ Btu}*(\text{Gas Heat Input}, 10^6 \text{ Btu/hr})$$

Attachment B

**Compliance Assurance Monitoring (CAM) Plan
CEP1, FEP26, FEP80, MEP12, MEP13 and FEP18**

Cargill, Inc.

**Compliance Assurance Monitoring
(CAM) Plan**

**Wahpeton, North Dakota
Corn Wet Mill**

June 2019

Table of Contents

1.0	Background.....	1
2.0	Applicability	1
3.0	Baghouse.....	2
3.1	Monitoring Approach.....	2
3.2	Justification	4
4.0	Cyclone	4
4.1	Monitoring Approach.....	5
4.2	Justification	5
5.0	Caustic Scrubber	6
5.1	Monitoring Approach.....	6
5.2	Justification	8

**Compliance Assurance Monitoring (CAM) Plan
Wahpeton, North Dakota
Corn Wet Mill**

1.0 Background

Compliance Assurance Monitoring (CAM) is required for affected sources under 40 CFR 64. A CAM plan detailing the applicability and proposed monitoring approach of affected sources is required to be included as part of the 40 CFR 70 (Title V) operating permit renewal process. The Cargill, Inc. Corn Wet Mill facility located in Wahpeton, North Dakota, was issued a renewal Air Pollution Control Title V Permit to Operate No. T5-G98001.

The following bullet items identify the applicability requirements for CAM as applied to individual emission units at a facility.

- Emission unit is located at a major source that is required to obtain a Title V permit;
- Emission unit is subject to emission limitation or standard for an applicable pollutant;
- Emission unit uses a control device to achieve compliance with the emission limitation;
- Potential pre-control emissions of applicable pollutants (with limits) from the emission unit are at least 100 percent of major source amount (100 tons per year); and,
- Emission unit is not otherwise exempt and does not use a Continuous Emission Monitor (CEM) for the applicable pollutant.

2.0 Applicability

Permitted emission units at the Wahpeton Corn Wet Mill facility were evaluated to determine which emission units have specific emission limitations and are equipped with control devices to maintain compliance with the emission limitations. Pre-control potential emissions were estimated for those emission units that were determined to have both an emission limitation and associated control equipment in order to determine if the uncontrolled emissions were greater than 100 percent of the major source amount. The pre-control potential emissions were “back-calculated” using the specific pollutant emission limitation in conjunction with the control equipment efficiency stated in the original Title V permit application for the facility. A complete listing of the Wahpeton Corn Wet Mill emission sources and CAM applicability calculations has been included in Attachment 1.

Based on the CAM applicability calculations, it was determined that the following emission sources and associated control equipment types must be included in the CAM plan.

Table 1. Emission Units Subject to CAM Requirements.

Emission Unit I.D.	Emission Point Number	Emission Unit	Control Equipment	Applicable Pollutant	Pre-Control Emissions (tpy)
CEP1	CEP1	Grain Unloading	Baghouse	PM ₁₀	257
FEP26	FEP26	Fiber Pellet Cooler	Cyclone	PM ₁₀	152
FEP80	FEP80	Fiber Bin and Pellet Bin	Baghouse	PM ₁₀	415
MEP12	MEP12	Steep Tanks	Caustic Scrubber	SO ₂	402
MEP13	MEP13	Millhouse Tanks	Caustic Scrubber	SO ₂	601
FEP18	FEP18	Feedhouse Tanks	Caustic Scrubber	SO ₂	526

As indicated in Table 1, three different control equipment technologies were identified for inclusion in the CAM plan: baghouse, cyclone, and caustic scrubber. The following sections are organized by control technology type and detail the various monitoring approaches and justifications for each control technology type.

3.0 Baghouse

The Wahpeton Corn Wet Mill facility uses baghouses, or fabric filter technology, to collect particulate matter (PM₁₀) generated from material handling operations of grain unloading (CEP1) and fiber/pellet bins (FEP80). Dust laden air is drawn through the fabric filters to capture particles entrained in the air. The fabric filter provides direct filtration as well as acting as a support for the formation and accumulation of a filter cake of particulate matter that provides for very high efficiency filtration.

As the particulate matter accumulates on the filter media and the filter cake is formed, the pressure drop across the fabric filter increases. Although the filter cake increases collection efficiency, it also restricts the airflow and increases energy requirements. For proper continuous operation of the fabric filter, the filter media must be periodically cleaned or replaced. Because these emission units operate at or near ambient temperatures, monitoring airflow temperature is not necessary.

3.1 Monitoring Approach

Table 2 summarizes the monitoring approach for the baghouse control devices associated with emission units CEP1 and FEP80.

Table 2. CEP1 and FEP80 Baghouse Monitoring Approach.

I. Indicators	Indicator No. 1 Differential Pressure	Indicator No. 2 Inspection/Maintenance
A. Measurement Approach	<p>CEP1 is equipped with a Magna Helix pressure drop gauge to continuously monitor operations.</p> <p>FEP80 is equipped with a pressure differential transmitter to continuously monitor operations.</p>	Equipment performance is monitored by observing opacity and differential pressure.
II. Indicator Range	<p>CEP1: 0.075 to 3.0 in. H₂O</p> <p>FEP80: 0.0 to 10.0 in. H₂O</p>	Routine inspections are performed by qualified personnel.
III. Performance Criteria	If the differential pressure is out of the specified operating range corrective action shall be taken according to the manufacturer's specifications and the equipment Operation and Maintenance Manual.	If inspections reveal repair work is needed, maintenance activities are initiated.
A. Representativeness	Differential pressure gauges were installed at representative locations.	NA
B. Monitoring Frequency	Differential pressure is observed once per week. Also, differential pressure drop data is recorded once per 24-hour period as noted in the Title V permit.	Routine observations and maintenance.
C. QA/QC Practices	Annual calibration of differential pressure gauges.	Qualified personnel perform inspections/maintenance.
D. Data Collection	Differential pressure readings will be manually recorded in units of inches of water column. Maintain records.	Maintain records of all maintenance activities performed.
E. Averaging Period	NA	NA

3.2 Justification

The first indicator used to monitor baghouse operation is differential pressure (DP). A DP gauge is used for measurement at each baghouse. Routine weekly observations of DP are performed and recorded by plant personnel to monitor bag performance. As particulate matter accumulates on the filter media and the filter cake is formed, DP across the fabric filter increases. An increase in DP that exceeds the specified indicator range may signal plugging. Maintenance activities may also cause brief excursions from the DP indicator range. Excursions from the DP range will be documented and reported, and corrective action will be initiated if necessary.

The second indicator used to monitor baghouse operation is a visible emissions check. Weekly visible emission checks will be performed by plant personnel. Additional visible emission checks will be performed in the event of an excursion from the DP indicator range. If visible emissions are present, this indicates an excursion and corrective action will be initiated. All excursions will be documented and reported.

Compliance testing is not required to establish the pressure drop range required to avoid potential emissions exceedances. DP monitoring as specified by the manufacturer is adequate to have a reasonable assurance of compliance and to ensure that the baghouse continues to operate properly and achieve the desired control efficiency.

4.0 Cyclone

The Wahpeton Corn Wet Mill facility uses a cyclone, or centrifugal collector, to recover product from fiber pellet cooler operations (FEP26) for reprocessing. Air used to cool the fiber pellets is circulated through the cyclone to capture and separate fiber fragments prior to venting the air to the atmosphere.

The process air stream enters near the top of the cyclone and is forced into a downward spiral because of the cyclone's shape and turning vanes. Centrifugal forces and inertia cause the particles to move outward, collide with the outer wall, and then slide downward to the bottom of the cyclone. Near the bottom of the cyclone, the air reverses its downward spiral and moves upward in a smaller inner spiral. Cleaned air exits from the top and recovered product exits from the bottom of the cyclone.

4.1 Monitoring Approach

Table 3 summarizes the monitoring approach for the cyclone control device associated with emission unit FEP26.

I. Indicators	Indicator No. 1 Inspection/Maintenance
A. Measurement Approach	Equipment performance is monitored by observing opacity and equipment condition.
II. Indicator Range	Routine inspections are performed by qualified personnel.
III. Performance Criteria	If inspections reveal repair work is needed, maintenance activities are initiated.
A. Representativeness	NA
B. Monitoring Frequency	Routine observations will be conducted weekly.
C. QA/QC Practices	Qualified personnel perform inspections/maintenance.
D. Data Collection	Maintain records of all maintenance activities performed.
E. Averaging Period	NA

4.2 Justification

The indicator used to monitor cyclone operation is inspection and maintenance. Cyclone performance is monitored by routine weekly inspections of equipment and visible emission checks performed by plant personnel. If visible emissions are present, this indicates an excursion and corrective action will be initiated. All excursions and maintenance activities will be documented and reported in a maintenance log.

The cyclone has no moving parts. As described previously the shape of the device promotes a spiral airflow, which causes fiber fragments in the air stream to collide with the sides of the device through centrifugal force and inertia. Proper maintenance of the cyclone as specified by the manufacturer to maintain the physical integrity of the device ensures proper operation and maximum product recovery.

5.0 Caustic Scrubber

The Wahpeton Corn Wet Mill facility uses caustic scrubbers to control emissions of sulfur dioxide (SO₂) generated from steep tank (MEP12), millhouse tank (MEP13) and feedhouse tank (FEP18) operations. Liquid Sodium Bisulfite (40%) or Ammonium Bisulfite (68%) is introduced into the steep tanks as a conditioner (corn softening agent) in preparation for milling. As the product is held in storage tanks at various stages of the milling process, some SO₂ gas is released. Emissions from the storage tanks pass through caustic scrubbers to control SO₂.

The SO₂-laden air steam enters the caustic scrubber, or spray tower, where a slurry mixture of water and a caustic substance absorb and neutralize the SO₂ as the air stream passes through the liquid droplet mixture. The control of SO₂ is dependent primarily on an adequate supply of caustic slurry to oxidize the SO₂.

5.1 Monitoring Approach

Table 4 summarizes the monitoring approach for the caustic scrubber control devices associated with emission units MEP12, MEP13 and FEP18.

Table 4. MEP12, MEP13 and FEP18 Caustic Scrubber Monitoring Approach.

I. Indicators	Indicator No. 1 pH Control	Indicator No. 2 Differential Pressure
A. Measurement Approach	Caustic scrubbers are equipped with pH control to continuously monitor operations and automatic valves for caustic addition.	MEP12, MEP13, and FEP18 are equipped with pressure differential transmitters to continuously monitor operations and sound alarms when acceptable pressure ranges are exceeded.
II. Indicator Range	Level of pH maintained > 5.5	MEP12: 1.5 to 15.0 in. H ₂ O MEP13: 1.5 to 15.0 in H ₂ O FEP18: 1.0 to 10.0 in H ₂ O
III. Performance Criteria	If the pH level is less than the specified value corrective action shall be taken according to the manufacturer's specifications.	If the differential pressure is out of the specified operating range corrective action shall be taken according to the manufacturer's specifications and the equipment Operation and Maintenance Manual.
A. Representativeness	Monitors to record pH levels of the scrubber water were installed at representative locations.	Differential pressure gauges were installed at representative locations.
B. Monitoring Frequency	pH levels of scrubber water are monitored continuously and control automatic valves for caustic addition.	Differential pressure is observed once per week. Alarms are monitored continuously.
C. QA/QC Practices	Annual calibration of pH monitors.	Annual calibration of differential pressure gauges.
D. Data Collection	Continuous pH levels are recorded by the process control system. Excursions below the required pH level are recorded by plant personnel.	Differential pressure readings will be manually recorded in units of inches of water column. Alarm events will be documented. Maintain records.
E. Averaging Period	1-hour	NA

5.2 *Justification*

The first indicator used to monitor caustic scrubber operation is the pH level of the scrubber water. The pH level of the scrubber water is monitored continuously but averaged in one-hour increments for compliance purposes and used to control automatic valves for caustic addition. As caustic is added to the scrubber water, the pH level increases. If the pH level decreases below a specified indicator value, caustic is automatically added to ensure proper operation and sufficient control of SO₂. Excursions of pH level below the specified indicator value will be documented and reported, and corrective action will be initiated if necessary.

The pH level of the scrubber water for each unit shall be maintained at or above 5.5. This indicator value provides assurance that caustic is being added to the scrubber water – otherwise the scrubber water would quickly become acidified due to absorption of SO₂. Caustic addition to the scrubber water is needed to maintain pH above this level and to ensure adequate control of SO₂.

The second indicator used to monitor caustic scrubber operation is differential pressure (DP). Routine weekly observations of DP are performed and recorded by plant personnel to monitor caustic scrubber performance. As particulate matter accumulates in the scrubber, DP across the scrubber system may increase. An increase in DP that exceeds the specified indicator range may signal plugging or fouling. Excursions from the DP range will be documented and reported, and corrective action will be initiated if necessary.

Compliance testing is not required to establish the pressure drop range required to avoid potential emissions exceedances. DP monitoring as specified by the manufacturer is adequate to have a reasonable assurance of compliance and to ensure that the scrubber continues to operate properly and achieve the desired control efficiency.

August 2008 Changes – Changed MEP 13 to same DP readings as MEP 12 due to identical scrubbers.

March 2009 Changes – Changed MEP 12 & 13 DP to 15.0 per engineer due to adding additional filtrate during last shutdown. Removed FEP 21 because it was included in Permit to Construct (PTC09009)

December 2014 Changes – removed old Title V renewal language on page 1.

June 2019 Changes – Added to Table 2 CEP1 and FEP80 Baghouse Monitoring Approach on p. 3 the verbiage under Section III.B. Performance Criteria Monitoring Frequency that the differential pressure drop data is recorded once per 24-hour period as noted in the Title V permit.

Added an averaging period of 1-hour for pH measurement of MEP12, MEP13 and FEP18 for Table 4, p. 7. Added information to p. 8 under 5.2 Justification section that the three scrubber pH's be averaged in on averaged in 1-hour increments for compliance purposes.

August 2019 Changes – added Ammonium Bisulfite (68%) on p. 6.

NO_x Alternative Monitoring Plan
 Predictive Emission Monitoring System (PEMS)
 NO_x Emissions
 245 x 10⁶ Btu/hr Boiler (EU UEP53)

The permittee shall use the following models/equations to predict NO_x emissions for the 245 x 10⁶ Btu/hr boiler (EU UEP53) as noted in the *Operations Monitoring program to Predict NO_x emissions for the Main Boiler (UEP53) at Cargill, Inc. Wahpeton, ND June 11-August 5, 1998 Mostardi Platt document pages 11 and 12.*

1. During startup/shutdown periods (steam flow < 50 kpph), a NO_x emission rate of **0.82 lb/10⁶ Btu** shall be recorded and the NO_x lb/hr shall be calculated as follows:

$$\text{NO}_x \text{ lb/hr} = (0.82 \text{ lb}/10^6 \text{ Btu}) (\text{Heat Input}, 10^6 \text{ Btu/hr})$$

2. During other periods, the following equations shall be used to calculate NO_x emissions:

If steam flow is > 50 kpph and steam flow is ≤ 95 kpph, then:

$$\begin{aligned} \text{NO}_x (\text{ppmvd at 3\% O}_2) &= 42.9 \\ &+ 0.122379199 * (\text{Stack Temperatures}, ^\circ\text{F}) \\ &- 0.089137751 * (\text{Steam Flow}, \text{kpph}) \\ &- 4.04837^{-5} * (\text{Fuel Flow}, \text{scfh}) \end{aligned}$$


If steam flow is > 95 kpph, then:

$$\begin{aligned} \text{NO}_x (\text{ppmvd}) &= 384.9 \\ &- 1.882 * (\text{Stack Temperature}, ^\circ\text{F}) \\ &- 20426 / (\text{Steam Flow}, \text{kpph}) \\ &- 1.294 * (\text{Steam Flow}, \text{kpph}) \\ &+ 0.826 * (\text{Exhaust Temperature}, ^\circ\text{F}) \\ &+ 0.00316^{-5} * (\text{Fuel Flow}, \text{scfh}) \\ &+ 12.64 * (\text{In Situ Boiler O}_2, \%) \\ &+ 6412258 / (\text{Fuel Flow}, \text{scfh}) \end{aligned}$$

$$\text{NO}_x (\text{ppmvd at 3\% O}_2) = \text{NO}_x (\text{ppmvd}) * ((20.9 - 3) / (20.9 - (\text{In Situ Boiler O}_2, \%)))$$

$$\text{NO}_x (\text{lb}/10^6 \text{ Btu}) = \text{NO}_x (\text{ppmvd at 3\% O}_2) * (0.001214271)$$

$$\text{NO}_x (\text{lb/hr}) = \text{NO}_x (\text{lb}/10^6 \text{ Btu}) * (\text{Gas Heat Input}, 10^6 \text{ Btu/hr})$$

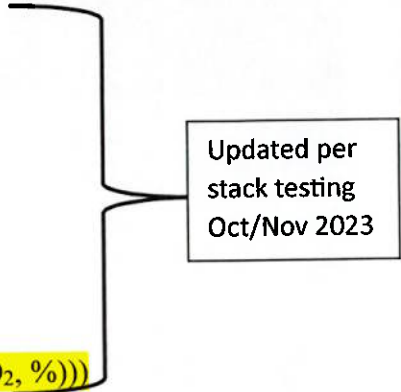

Updated per
stack testing
Oct/Nov 2023

March 24, 2021

Ms. Madison McShea
Cargill, Inc.
18049 County Road 8 E
Wahpeton, ND 58075

FILE

Re: Air Pollution Control
Permit to Construct

Dear Ms. McShea:

Pursuant to the Air Pollution Control Rules of the State of North Dakota, the Department of Environmental Quality has completed final review of your request for a thermal oxidizer temperature change for EUs FEP20 and FEP21 at your existing facility in Wahpeton, ND.

Based on the results of the documents reviewed, the Department hereby approves a minimum thermal oxidizer temperature of 1,350°F under the current operating scenario (no production of Fiber Pellet products). Should the facility return to the production of Fiber Pellet products, a minimum thermal oxidizer temperature of 1,425°F must be maintained unless compliance testing demonstrates that the applicable emission limits can be achieved at a lower minimum operating temperature.

The revised minimum temperature will be incorporated into the Title V Permit to Operate for your facility when the permit is modified/reissued in the future. Questions regarding the Title V permit may be addressed to Kyla Schneider at (701)328-5218 or kkschneider@nd.gov.

If you have any questions, please contact Jaden Voth at (701)328-5274 or at jvoth@nd.gov.

Sincerely,



Craig D. Thorstenson
Manager, Permitting Program
Division of Air Quality

CDT:saj
Enc: