


Tobacco Garden Aquifer

McKenzie County


Aquifer At-a-Glance				
Area	55.5 square miles			
Aquifer Type	Unconfined and Confined Surficial			
Major Land Uses over Aquifer	Crops (45%)			
(percentage of aquifer area covered in 2017) ¹	Grassland/Pasture (38%)			
Depth to Water (2014-2021)* 2	5-40+ feet			
Total Unique Wells Sampled	2			
Wells Sampled in 2021	2			
Years Sampled	2014, 2016, 2019, 2021			

^{*}Depths to water may vary seasonally, year to year, and across the aquifer

- Aquifer materials consist of sands and gravels that were deposited by streams in an ancient valley carved in the region's bedrock. Most of the aquifer is overlain by lake bed deposits, clay of glacial origin, or slope-base deposits.²
- Aquifer deposits average around 70 feet thick. The aquifer averages around a mile wide.²
- Domestic and stock wells are common in the aquifer.
 Several irrigation and industrial wells are also installed in the aquifer.
- In North Dakota, permits are required to withdraw large quantities of groundwater. In 2020, 292 million gallons of permitted water were drawn from the aquifer; industrial use consumed the largest quantity of water. For more information on water use and permits, contact the North Dakota Department of Water Resources (dwr.nd.gov).

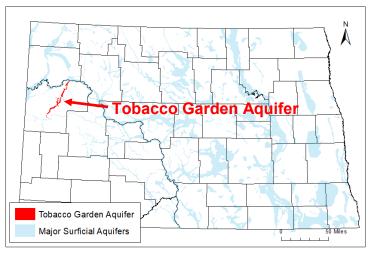

2020 Tobacco Garden aquifer permitted water use (from North Dakota Department of Water Resources (dwr.nd.gov))↓

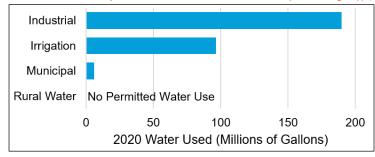

About the Western Groundwater Monitoring Program

- The North Dakota Department of Environmental Quality (NDDEQ) monitors a network of wells in approximately 20 surficial aquifers that are at elevated risk of oilfield contamination.
- Aquifers are sampled on a 1.5-year rotation.
- Monitoring began in 2013.
- The monitored aquifers are all within the oilproducing counties of northwestern North Dakota.
- Water is tested for general chemistry parameters, trace metals, diesel and gasoline range organics, benzene, toluene, ethylbenzene, and xylenes.

References

⁽¹⁾ US Department of Agriculture, 2017, National Agricultural Statistics Service Cropland Data Layer.

⁽²⁾ Croft, M.G., 1985, Ground-Water Resources of McKenzie County, North Dakota. North Dakota State Water Commission County Ground-Water Studies 37-Part 3, North Dakota Geological Survey Bulletin on

Water Chemistry

Is Aquifer
Water
High in?

	Analyte	Result	2021 Median Concentration	Potential Effects
	Arsenic	Locally	0.009 mg/L	Skin or circulatory system damage, increased cancer risk
r	Iron	YES	6.62 mg/L	Metallic taste/odor, discoloration of surfaces
	Manganese	YES	0.24 mg/L	
?	Sodium	YES	397 mg/L	Taste, people with certain health conditions may need to limit intake
	Sulfate	YES	459 mg/L	Taste/odor, laxative effect for people not used to the water


For more information about Maximum Contaminant Levels (MCLs), health effects, and treatment options for these contaminants and more, see the NDDEQ's fact sheets (deq.nd.gov/wq/1_Groundwater) or visit the US EPA website (epa.gov/ground-water-and-drinking-water).

Dominant Water Type	Water Hardness
Sodium-Bicarbonate	Very Hard

Nitrate

Percentage of Wells Exceeding the Nitrate Maximum Contaminant Level (MCL)* (10 mg/L as N).

No Nitrate MCL Exceedances

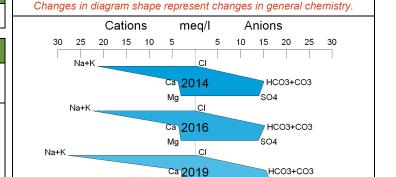

SO4

HCO3+CO3

Stiff diagram of aquifer median general water chemistry.

Oilfield Compounds

Gasoline and Diesel Range Organics

Gasoline and diesel range organics (GRO and DRO) are groups of chemical compounds containing carbon that are common in either gasoline or diesel fuel. Neither group has a regulatory limit, but the NDDEQ uses a screening level of 500 μg/L. Detections below this may be from other natural carbon sources such as decaying plant matter rather than oil byproducts.

GRO Screening Level Exceedances	None
DRO Screening Level Exceedances	None

Chloride

Chloride is both a natural component of groundwater and a component of brine (salt water), a byproduct of oil production.

Percentage of Wells Exceeding the Non-regulatory Chloride Secondary Water Quality Standard (250 mg/L).

No Chloride Standard Exceedances

BTEX

Ca 2021 Mg

Benzene, toluene, ethylbenzene, and xylenes (BTEX) are a group of compounds that are naturally occurring in petroleum. All four have Maximum Contaminant Levels (MCLs)* that can be used as screening levels to determine the severity of any detection.

Benzene Detections	None
Toluene Detections	None
Ethylbenzene Detections	None
Xylenes Detections	None

Bromide

Bromide is a natural component of groundwater and can also be introduced through oil and gas extraction

Wells Exceeding NDDEQ's 3-5 mg/L Screening Level:	

*Note that MCLs are for public drinking water systems; private wells are not regulated in North Dakota. MCLs still provide guidelines for drinking groundwater.

Feel free to use this information, but please credit the North Dakota Department of Environmental Quality.