

# **E. coli Bacteria TMDL for the Sheyenne River in Benson, Eddy, and Wells Counties, North Dakota**

**Final:** September 2012

**Prepared for:**

US EPA Region 8  
1595 Wynkoop Street  
Denver, CO 80202-1129

**Prepared by:**

Heather Husband Duchscherer  
Environmental Scientist  
North Dakota Department of Health  
Division of Water Quality  
Gold Seal Center, 4th Floor  
918 East Divide Avenue  
Bismarck, ND 58501-1947



**North Dakota Department of Health  
Division of Water Quality**

E. coli Bacteria TMDL  
for the Sheyenne River in  
Benson, Eddy, and Wells Counties, North Dakota

Jack Dalrymple, Governor  
Terry Dwelle, M.D., State Health Officer



North Dakota Department of Health  
Division of Water Quality  
Gold Seal Center, 4th Floor  
918 East Divide Avenue  
Bismarck, ND 58501-1947

701.328.5210

---

1.0 INTRODUCTION AND DESCRIPTION OF THE WATERSHED	1
1.1 Clean Water Act Section 303 (d) Listing Information	2
1.2 Ecoregions	3
1.3 Land Use	4
1.4 Climate and Precipitation	5
1.5 Available Data	5
1.5.1 E. coli Bacteria Data	5
1.5.2 Hydraulic Discharge	7
2.0 WATER QUALITY STANDARDS	7
2.1 Narrative North Dakota Water Quality Standards	7
2.2 Numeric North Dakota Water Quality Standards	8
3.0 TMDL TARGETS	8
4.0 SIGNIFICANT SOURCES	9
4.1 Point Source Pollution Sources	9
4.2 Nonpoint Source Pollution Sources	9
5.0 TECHNICAL ANALYSIS	10
5.1 Mean Daily Stream Flow	10
5.2 Flow Duration Curve Analysis	11
5.3 Load Duration Analysis	12
5.4 Loading Sources	14
6.0 MARGIN OF SAFETY AND SEASONALITY	14
6.1 Margin of Safety	14
6.2 Seasonality	15
7.0 TMDL	15
8.0 ALLOCATION	16
8.1 Livestock Management Recommendations	17
8.2 Other Recommendations	19
9.0 PUBLIC PARTICIPATION	20
10.0 MONITORING	20
11.0 TMDL IMPLEMENTATION STRATEGY	20
12.0 REFERENCES	22

---

### List of Figures

1. Upper Sheyenne River Sub-basin in North Dakota	1
2. Sheyenne River TMDL Listed Segment ND-09020202-004-S_00	2
3. Level IV Ecoregions in the Sheyenne River Watershed	3
4. Land Use in the Watershed of the TMDL Listed Segment ND-09020202-004-S_00	4
5. Monthly Precipitation for NDAWN Weather Station Located Near Harvey, ND	5
6. NDDoH E. coli Bacteria Sample Sites 385505 and 385502, Collocated with USGS Gauging Stations 05055300 and 05055400, Respectively, on the Sheyenne River	6
7. Mean Annual Discharge at the USGS Gauging Station on the Sheyenne River near Flora, ND (05055300)	10
8. Flow Duration Curve for the Sheyenne River Monitoring Station 385505 (USGS Station 05055300)	12
9. E. coli Bacteria Load Duration Curve for the Sheyenne River Monitoring Station 385505	13

### List of Tables


1. General Characteristics of the Sheyenne River TMDL Listed Segment's Watershed	1
2. Sheyenne River Section 303(d) Listing Information for Assessment Unit ID ND-09020202-004-S_00	2
3. Summary of E. coli Bacteria Data for Sites 385505 and 385502	6
4. North Dakota Bacteria Water Quality Standards for Class IA Streams	8
5. Nonpoint Sources of Pollution and Their Potential to Pollute at a Given Flow Regime	14
6. TMDL Summary for the Sheyenne River	15
7. E. coli Bacteria TMDL ( $10^7$ CFU/day) for the Sheyenne River Assessment Unit ID ND-09020202-004-S_00 as Represented by Site 385505	16
8. Management Practices and Flow Regimes Affected by Implementation of BMPs	17
9. Bacterial Water Quality Response to Four Grazing Strategies	18
10. Relative Gross Effectiveness of Confined Livestock Control Measures	19

### Appendices

- A. E. coli Bacteria Data Collected for Sites 385505 and 385502
- B. Flow Duration Curve for Site 385505
- C. Load Duration Curve, Estimated Load, TMDL Target, and Percent Load Reduction Required for Site 385505
- D. US EPA Region 8 TMDL Review Form and Decision Document

## 1.0 INTRODUCTION AND DESCRIPTION OF THE WATERSHED

The Upper Sheyenne River sub-basin (09020202) encompasses approximately 1,907 square miles (1,220,722 million acres) in Benson, Eddy, McHenry, Pierce, Sheridan, and Wells Counties (Figure 1). For the purposes of this TMDL, the impaired stream segment is located in Benson, Eddy, and Wells Counties and the associated watershed is comprised of approximately 342,826 acres (Table 1). The Sheyenne River impaired stream segment lies within the level III Northern Glaciated Plains (46) ecoregion.

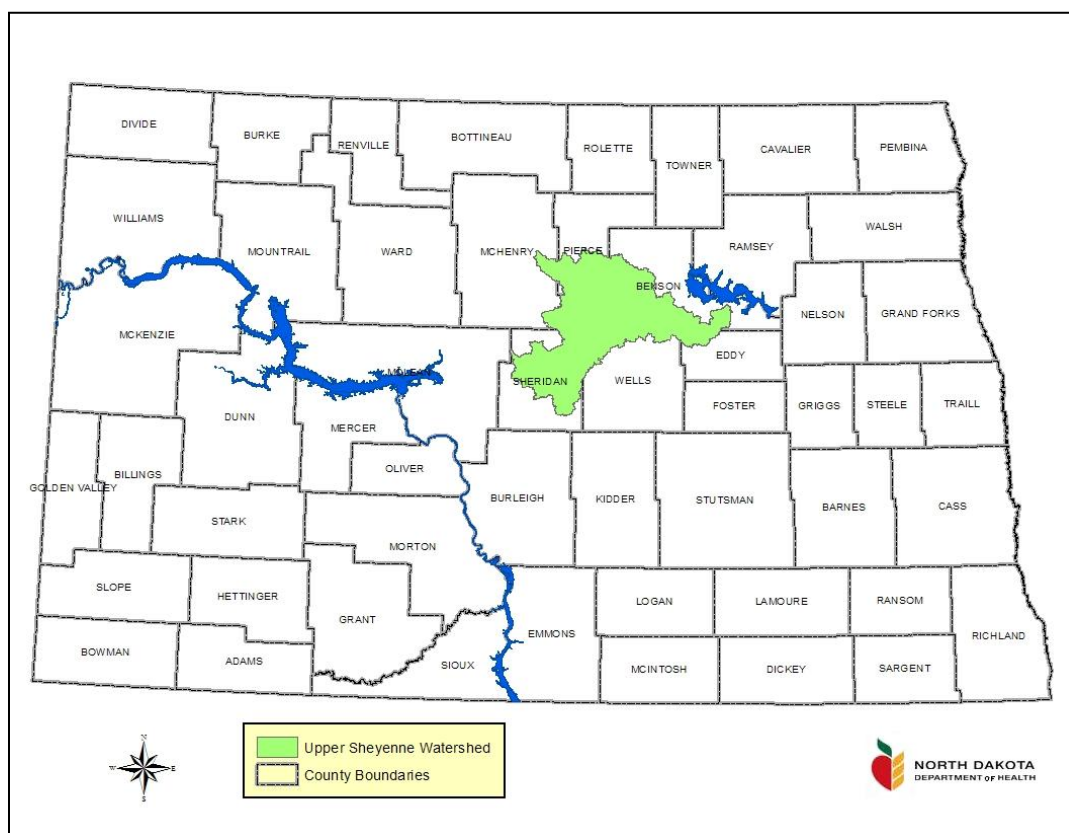

**Figure 1. Upper Sheyenne River Sub-basin in North Dakota.**

**Table 1. General Characteristics of the Sheyenne River TMDL Listed Segment’s Watershed.**


<b>Legal Name</b>	Sheyenne River
<b>Stream Classification</b>	Class IA
<b>Major Drainage Basin</b>	Sheyenne River
<b>8-Digit Hydrologic Unit</b>	09020202
<b>Counties</b>	Benson, Eddy, and Wells Counties
<b>Level III Ecoregion</b>	Northern Glaciated Plains (46)
<b>Watershed Area (acres)</b>	342,826

**1.1 Clean Water Act Section 303(d) Listing Information**

Based on the 2010 Section 303 (d) List of Impaired Waters Needing TMDLs (NDDoH, 2010), the North Dakota Department of Health (NDDoH) has identified a 40.37 mile segment of the Sheyenne River from its confluence with Big Coulee downstream to its confluence with the Warsing Dam Watershed, located in Benson, Eddy, and Wells Counties, as not supporting for recreational uses. The impairments are due to Escherichia coli (E. coli) bacteria (Table 2 and Figure 2).

**Table 2. Sheyenne River Section 303(d) Listing Information for Assessment Unit ID ND-09020202-004-S\_00 (NDDoH, 2010).**

<b>Assessment Unit ID</b>	ND-09020202-004-S_00
<b>Waterbody Description</b>	Sheyenne River from its confluence with Big Coulee downstream to its confluence with the Warsing Dam Watershed
<b>Size</b>	40.37 miles
<b>Designated Use</b>	Recreation
<b>Use Support</b>	Not Supporting
<b>Impairment</b>	E. coli Bacteria
<b>TMDL Priority</b>	Low

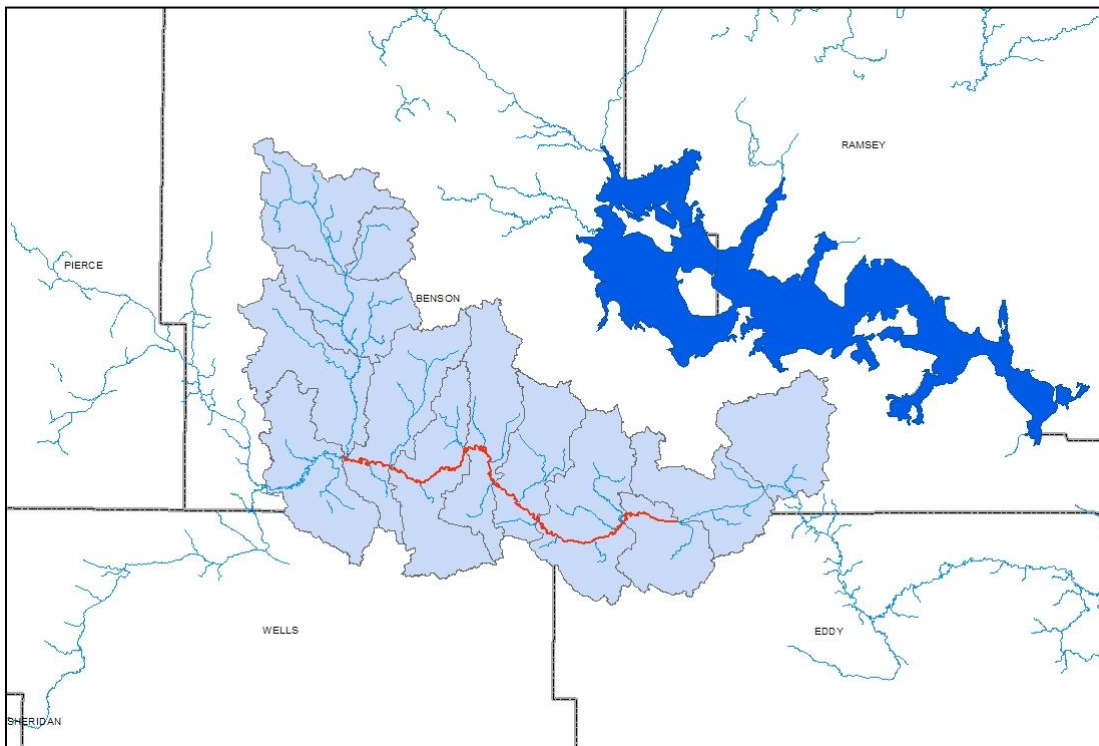

**Figure 2. Sheyenne River TMDL Listed Segment ND-09020202-004-S\_00.**


## 1.2 Ecoregions

The watershed for this TMDL listed segment lies within three level IV ecoregions. These are the End Moraine Complex Ecoregion (46f), the Drift Plains Ecoregion (46i), and the Glacial Outwash Ecoregion (46j) (Figure 3).

The End Moraine Complex ecoregion (46f) is composed of blocks of material scraped off and thrust up by the continental glacier at the south end of the Devils Lake basin. The western part of the ecoregion exhibits similar stagnate moraines similar to the Missouri Coteau while the southern moraines contain slightly higher elevations resulting in wooded lake boundaries and morainal ridges. Land use within the End Moraine Complex ecoregion consists of mixed range and cropland depending on slope and presence of rocky soil (USGS, 2006).

The Drift Plains ecoregion (46i) was created from the retreating Wisconsin glaciers which left a subtle rolling topography, thick glacial till and a large number of temporary and seasonal wetlands. The Drift Plains contain productive soils and level topography which largely favors cultivation practices. Historic grasslands of transitional and mixed grass prairie have been replaced with fields of spring wheat, barley, sunflowers and alfalfa (USGS, 2006).

The Glacial Outwash ecoregion (46j) is characterized by smoother topography and soils with high permeability and low water holding capacity. Cropland production is poor to fair with most areas being used for irrigated agriculture. Wind caused soil erosion is present in droughty areas and is reduced by retaining native range grasses like little bluestem, needle-and-thread and green needlegrass (USGS, 2006).

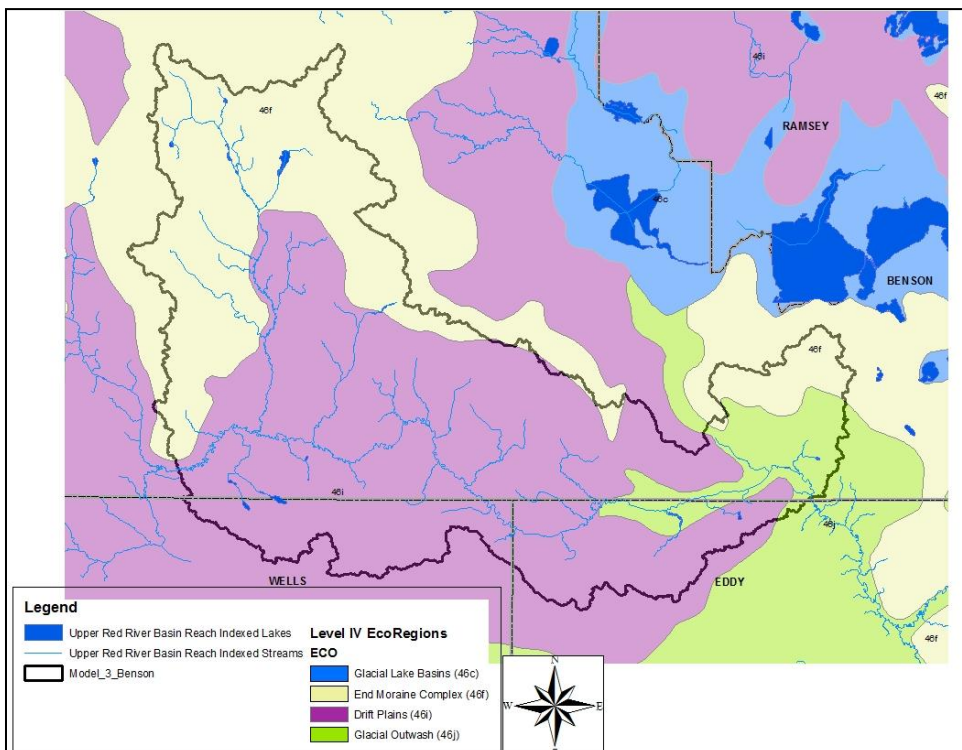

**Figure 3. Level IV Ecoregions in the Sheyenne River Watershed.**

### 1.3 Land Use

According to National Agricultural Statistics Service (NASS) 2007 land cover data, the dominant land use in the watershed is agriculture with 59 percent cropland, 38 percent used for grassland/pasture, and the remaining 3 percent a combination of water, wetlands, fallow/idle cropland, or developed/open space (Figure 4). The dominant crops grown in the watershed are spring wheat, soybeans, dry beans, corn, and sunflowers.


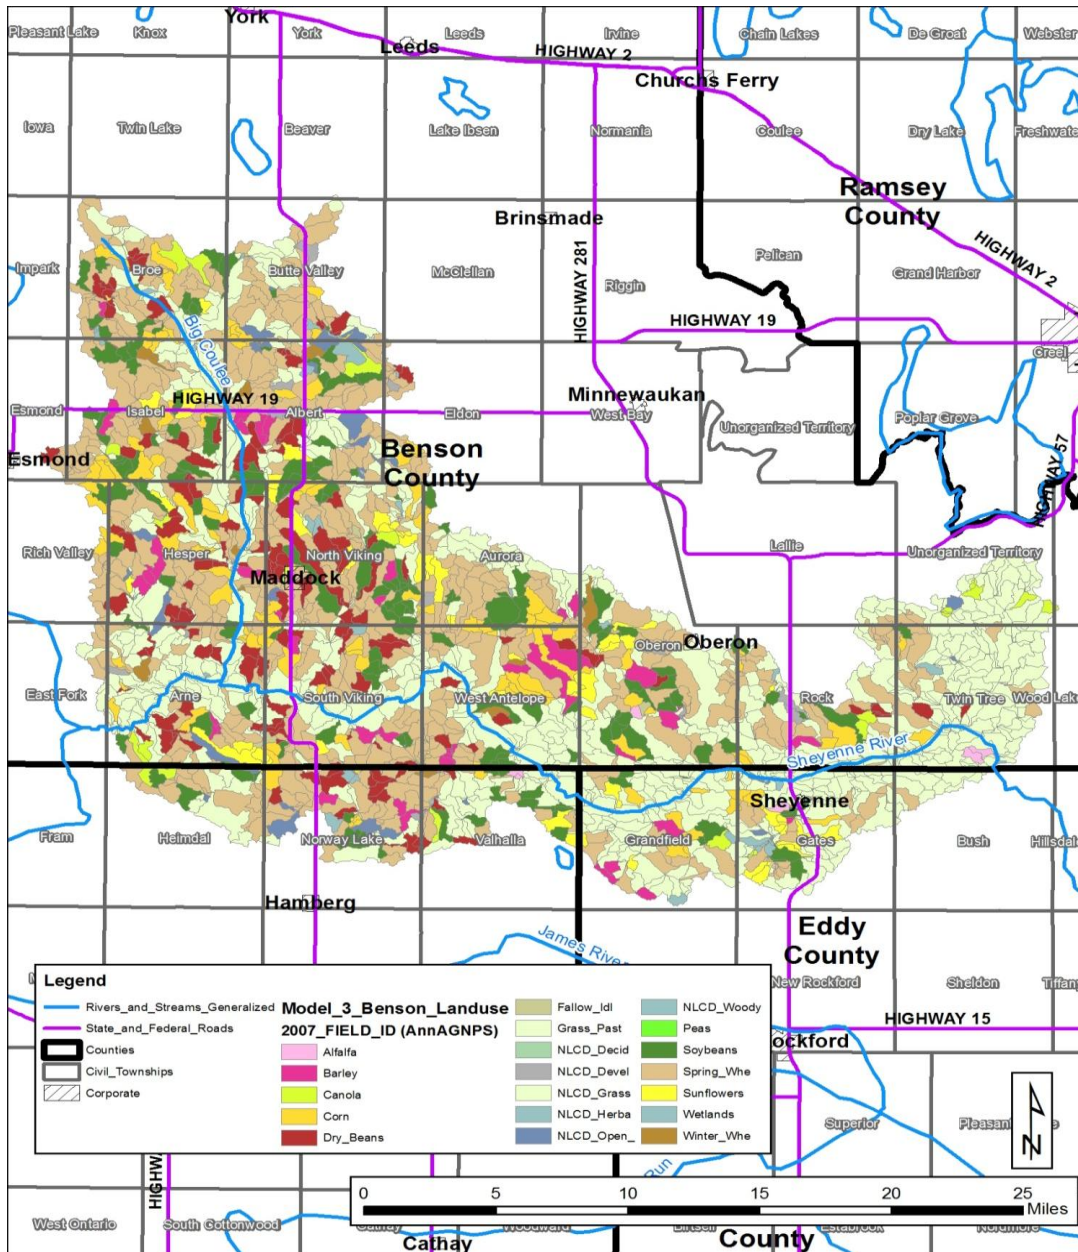


Figure 4. Land Use in the Contributing Watershed of TMDL Listed Segment ND-09020202-004-S\_00 (NASS, 2007).



## 1.4 Climate and Precipitation

Precipitation data for the Upper Sheyenne River was obtained from the North Dakota Agricultural Weather Network station located near Harvey, ND, approximately 13 miles southwest of the TMDL listed segment (NDAWN, 2012). Figure 5 shows monthly precipitation data averaged for the years of 1995 to 2008 compared to the precipitation totals for each month during 2009 and 2010. Snowfall data had not been converted into precipitation for the months of January through March and November through December for the years 1995 to 2010, and so those months do not appear in Figure 5.

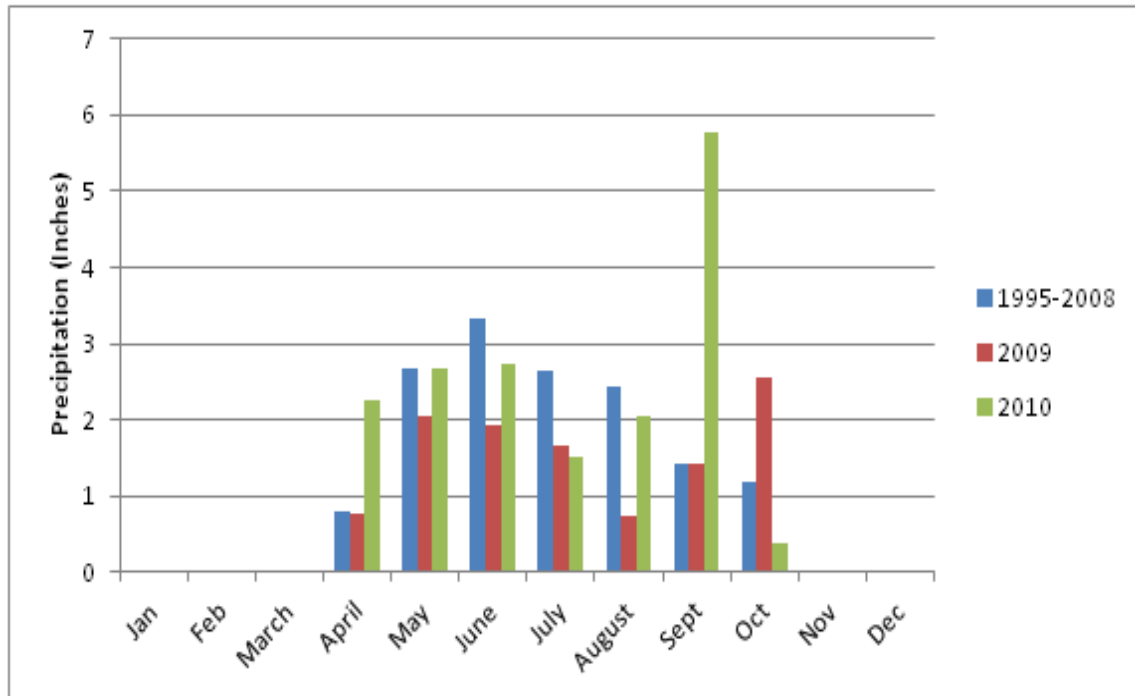

**Figure 5. Monthly Precipitation for the NDAWN Weather Station Located Near Harvey, ND.**


## 1.5 Available Data

### 1.5.1 E. coli Bacteria Data

Excessive amounts of fecal bacteria in surface waters used for recreation have been known to indicate an increased risk of pathogen-induced illness to humans. Infections due to pathogen contaminated waters include gastrointestinal, respiratory, eye, ear, nose, throat, and skin disease (EPA, 1986). The fecal bacteria known to cause the most harm to humans is E. coli bacteria, and is the parameter now used in NDDoH water quality standards.

E. coli data were collected at two sites 385505 and 385502 along the Sheyenne River (Figure 6). The sites were monitored weekly when flow conditions were present during the recreation season of May 1 through September 30 in 2009 and 2010. Each monitoring station was sampled by the Wells County Soil Conservation District. The complete set of data is available in Appendix A.

Table 3 provides a summary of E. coli geometric mean concentrations, the percentage of samples exceeding 409 CFU/100mL for each month and the recreational use assessment by month. The geometric mean E. coli bacteria concentration and the percent of samples over 409 CFU/100ml was calculated for each month (May-September) using those samples collected during each month in 2009 and 2010.

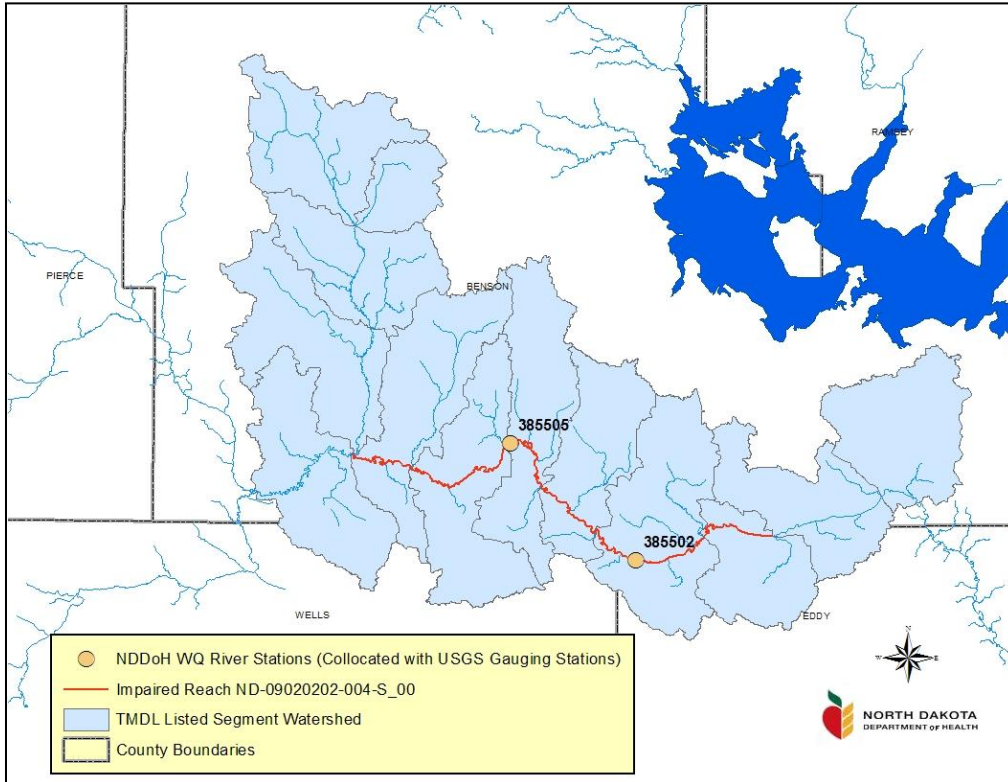

**Figure 6. NDDoH E. coli Bacteria Sample Sites 385505 and 385502, Collocated with USGS Gauging Stations 05055300 and 05055400, Respectively, on the Sheyenne River.**

**Table 3. Summary of E. coli Bacteria Data for Sites 385505 and 385502 (Data Collected in 2009 and 2010).**

385505					
Recreational Season	May	June	July	August	September
Number of Samples	4	10	8	9	9
Geometric Mean	52	61	37	124	165
% Exceeded 409 CFU/100 mL	0%	10%	0%	11%	22%
Recreational Use Assessment	INSFD	FSBT	FS	FSBT	NS
385502					
Recreational Season	May	June	July	August	September
Number of Samples	4	10	8	9	9
Geometric Mean	60	49	52	48	105
% Exceeded 409 CFU/100 mL	0%	0%	25%	0%	11%
Recreational Use Assessment	INSFD	FS	FSBT	FS	FSBT

FS – Fully Supporting; FSBT- Fully Supporting, but Threatened; NS – Not Supporting; INSFD – Insufficient Data

Analysis of E. coli bacteria data collected at sites 385505 in 2009 and 2010, demonstrated that the site was fully supporting, but threatened in June and August, fully supporting in July, and not supporting in September. There was insufficient data to make a determination for May.

Analysis of E. coli bacteria data collected at sites 385502 in 2009 and 2010, demonstrated that the site was fully supporting in June and August, and fully supporting, but threatened in July and September. There was insufficient data to make a determination for May for this site as well.

### 1.5.2 Hydraulic Discharge

Daily stream discharge values were collected at United States Geological Survey (USGS) gauging stations 05055300 and 05055400. The USGS station 05055300 has operated during open water (April through November) since 2004 and is collocated with NDDoH monitoring station 385505. The USGS station 05055400 has operated during open water (April through November) since 2005 and is collocated with the NDDoH monitoring location 385502. For the purposes of this TMDL, all discharge records through 2011 will be used in the analysis for the TMDL.

## 2.0 WATER QUALITY STANDARDS

The Clean Water Act requires that Total Maximum Daily Loads (TMDLs) be developed for waters on a state's Section 303(d) list. A TMDL is defined as “the sum of the individual wasteload allocations for point sources and load allocations for non point sources and natural background” such that the capacity of the waterbody to assimilate pollutant loadings is not exceeded. The purpose of a TMDL is to identify the pollutant load reductions or other actions that should be taken so that impaired waters will be able to attain water quality standards. TMDLs are required to be developed with seasonal variations and must include a margin of safety that addresses the uncertainty in the analysis. Separate TMDLs are required to address each pollutant or cause of impairment, which in this case is E. coli bacteria.

### 2.1 Narrative North Dakota Water Quality Standards

The North Dakota Department of Health has set narrative water quality standards that apply to all surface waters in the State. The narrative general water quality standards are listed below (NDDoH, 2011).

- All waters of the State shall be free from substances attributable to municipal, industrial, or other discharges or agricultural practices in concentrations or combinations that are toxic or harmful to humans, animals, plants, or resident aquatic biota.
- No discharge of pollutants, which alone or in combination with other substances shall:
  - a. Cause a public health hazard or injury to environmental resources;
  - b. Impair existing or reasonable beneficial uses of the receiving water; or

- c. Directly or indirectly cause concentrations of pollutants to exceed applicable standards of the receiving waters.

In addition to the narrative standards, the NDDoH has set biological goal for all surface waters in the state. The goal states “the biological condition of surface waters shall be similar to that of sites or waterbodies determined by the department to be regional reference sites” (NDDoH, 2011).

## 2.2 Numeric North Dakota Water Quality Standards

The Sheyenne River is a Class IA stream as defined below (NDDoH, 2011).

**Class IA-** The quality of the waters in this class shall be the same as the quality of class I streams, except that where natural conditions exceed class I criteria for municipal and domestic use, the availability of softening or other treatment methods may be considered in determining whether ambient water quality meets the drinking water requirements of the department.

Table 4 provides a summary of the numeric E. coli criteria which applies to Class IA streams. The E. coli bacteria standard applies only during the recreation season from May 1 to September 30.

**Table 4. North Dakota Bacteria Water Quality Standards for Class IA Streams.**

Parameter	Standard	
	Geometric Mean <sup>1</sup>	Maximum <sup>2</sup>
E. coli Bacteria	126 CFU/100 mL	409 CFU/100 mL

<sup>1</sup> Expressed as a geometric mean of representative samples collected during any consecutive 30-day period

<sup>2</sup> No more than 10 percent of samples collected during any consecutive 30-day period shall individually exceed the standard.

## 3.0 TMDL TARGETS

A TMDL target is the value that is measured to judge the success of the TMDL effort. TMDL targets must be based on state water quality standards, but can also include site specific values when no numeric criteria are specified in the standard. The following TMDL target for the Sheyenne River is based on the NDDoH water quality standard for E. coli bacteria.

This segment of the Sheyenne River is impaired because of E. coli bacteria. The Sheyenne River is classified not supporting recreational beneficial uses because of E. coli bacteria counts exceeding the North Dakota water quality standard. The North Dakota water quality standard for E. coli bacteria is a geometric mean concentration of 126 CFU/100 mL during the recreation season from May 1 to September 30. Thus, the TMDL target for this report is 126 CFU/100 mL. In addition, no more than ten percent of samples collected for E. coli bacteria should exceed 409 CFU/100 mL.

While the standard is intended to be expressed as a 30-day geometric mean, for purposes of this TMDL, the target is based on an E. coli concentration of 126 CFU/100 mL expressed as a daily average based on individual grab samples. Expressing the target in this way will ensure the

TMDL will result in both components of the standard being met and that recreational uses are restored.

## **4.0 SIGNIFICANT SOURCES**

### **4.1 Point Source Pollution Sources**

There are no known point sources in this TMDL listed segment of the Sheyenne River. E. coli bacteria polluting the river are from nonpoint sources.

There are five known animal feeding operations (AFOs) in the contributing watershed of this TMDL listed segment of the Sheyenne River. The five AFOs in the Sheyenne River watershed include four small (0-300 animal units (AUs)) AFOs and one large (1,000 AUs and greater) AFO which have permits to operate. All five AFOs are zero discharge facilities and are not deemed a significant point source of E. coli bacteria loadings to the Sheyenne River.

### **4.2 Nonpoint Source Pollution Sources**

This TMDL listed segment of the Sheyenne River is experiencing E. coli bacteria pollution from nonpoint sources in the watershed. Livestock grazing and watering in proximity to the Sheyenne River is common along the TMDL listed segment.

The southeast section of North Dakota typically experiences long duration or intense precipitation during the early summer months. These storms can cause overland flooding and rising river levels. Due to the close proximity of livestock grazing and watering to the river, it is likely that this contributes E. coli bacteria to the Sheyenne River.

These assessments are supported by the load duration curve analysis (Section 5.3) which shows exceedences of the E. coli bacteria standard occurring during wet and moist condition flow regimes.

Wildlife may also contribute to the E. coli bacteria found in the water quality samples, but most likely in a lower concentration. Wildlife are nomadic with fewer numbers concentrating in a specific area, thus decreasing the probability of their contribution of fecal matter in significant quantities.

Septic system failure might also contribute to the E. coli bacteria in the water quality samples. Failures can occur for several reasons, although the most common reason is improper maintenance (e.g. age, inadequate pumping). Other reasons for failure include improper installation, location, and choice of the system. Harmful household chemicals can also cause failure by killing the bacteria that digest the waste. While the number of systems that are not functioning properly is unknown, it is estimated that 28 percent of the systems in North Dakota are failing (EPA, 2002).

## 5.0 TECHNICAL ANALYSIS


In TMDL development, the goal is to define the linkage between the water quality target and the identified source or sources of the pollutant (i.e. E. coli bacteria) to determine the load reduction needed to meet the TMDL target. To determine the cause and effect relationship between the water quality target and the identified source, the “load duration curve” methodology was used. The loading capacity or total maximum daily load (TMDL) is the amount of a pollutant (e.g., E. coli bacteria) a waterbody can receive and still meet and maintain water quality standards and beneficial uses. The following technical analysis addresses the E. coli bacteria reductions necessary to achieve the water quality standards target for E. coli bacteria of 126 CFU/100 mL with an explicit margin of safety of ten percent.

### 5.1 Mean Daily Stream Flow

For this TMDL, the daily stream discharge values from USGS gauging station 05055300, collocated with NDDoH stream station 385505, will be used to derive the TMDL load and reduction needed. Of the two NDDoH monitoring sites located along the impaired reach, this site showed the greatest impairment. Deriving the TMDL from data collected at this site will ensure the most protective measures for the entire segment.

USGS station 05055300 has operated during open water (April through November) since 2004. For the purposes of this TMDL, all discharge records through 2011 will be used to describe the hydrology. This block of time should account for wet and dry cycles through the hydrological history of the USGS gauging station.

From 2005 to 2008, the annual mean discharge of the Sheyenne River at the USGS gauging station was very low, most likely due to a dry cycle. Then in 2009 and 2010 the mean annual discharge was high, displaying above average flows (Figure 7). In 2009, the discharge was close to six times higher than the average annual discharge of 2005-2008 (35.35cfs). This can be attributed to record snowfalls and above average spring rains that were present all across North Dakota, as well as the cumulative effects of higher discharges in the upstream sub-watersheds.

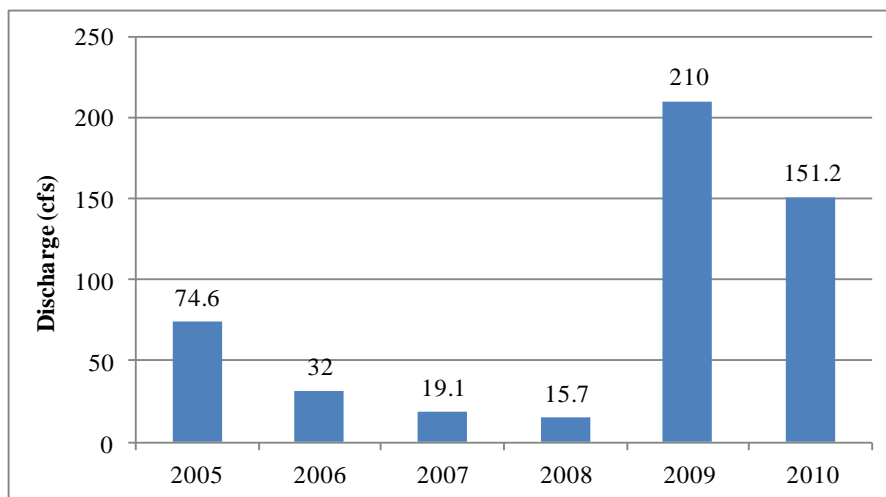

**Figure 7. Mean Annual Discharge at the USGS Gauging Station on the Sheyenne River near Flora, ND (05055300).**

In eastern North Dakota, rain events are variable generally occurring during the months of April through August. Rain events can be sporadic and heavy or light, occurring over a short duration. Precipitation events of large magnitude, occurring at a faster rate than absorption, contribute to high runoff events. These events are represented by runoff in the high flow regime. The medium flow regime is represented by runoff that contributes to the stream over a longer duration. The low flow regime is characteristic of drought or precipitation events of small magnitude and do not contribute to runoff.


## 5.2 Flow Duration Curve Analysis

The flow duration curve serves as the foundation for the load duration curve used in the TMDL. Flow duration curve analysis looks at the cumulative frequency of historic flow data over a specified time period. A flow duration curve relates flow (expressed as mean daily discharge) to the percent of time those mean daily flow values have been met or exceeded. The use of “*percent of time exceeded*” (i.e., duration) provides a uniform scale ranging from 0 to 100 percent, thus accounting for the full range of stream flows for the period of record. Low flows are exceeded most of the time, while flood flows are exceeded infrequently (EPA, 2007).

A basic flow duration curve runs from high to low (0 to 100 percent) along the x-axis with the corresponding flow value on the y-axis (Figure 8). Using this approach, flow duration intervals are expressed as a percentage, with zero corresponding to the highest flows in the record (i.e., flood conditions) and 100 to the lowest flows in the record (i.e., drought). Therefore, as depicted in Figure 8, a flow duration interval of twenty five (25) percent, associated with a stream flow of 69 cfs, implies that 25 percent of all observed mean daily discharge values equal or exceed 69 cfs.

Once the flow duration curve is developed for the stream site, flow duration intervals can be defined which can be used as a general indicator of hydrologic condition (i.e. wet vs dry conditions and to what degree). These intervals (or zones) provide additional insight about conditions and patterns associated with the impairment (E. coli bacteria in this case) (EPA, 2007). As depicted in Figure 8, the flow duration curve for site 385505 representing TMDL segment ND-09020202-004-S was divided into four zones, one representing high flows (0-7 percent), another for wet conditions (7-39 percent), one for moist conditions (39-64 percent) and one for low flows (64-86 percent). Based on the flow duration curve analysis, no flow occurred 14 percent of the time (86 to 100 percent).

These flows intervals were defined by examining the range of flows for the site for the period of record and then by looking for natural breaks in the flow record based on the flow duration curve plot. A secondary factor in determining the flow intervals used in the analysis is the number of E. coli bacteria observations available for each flow interval.

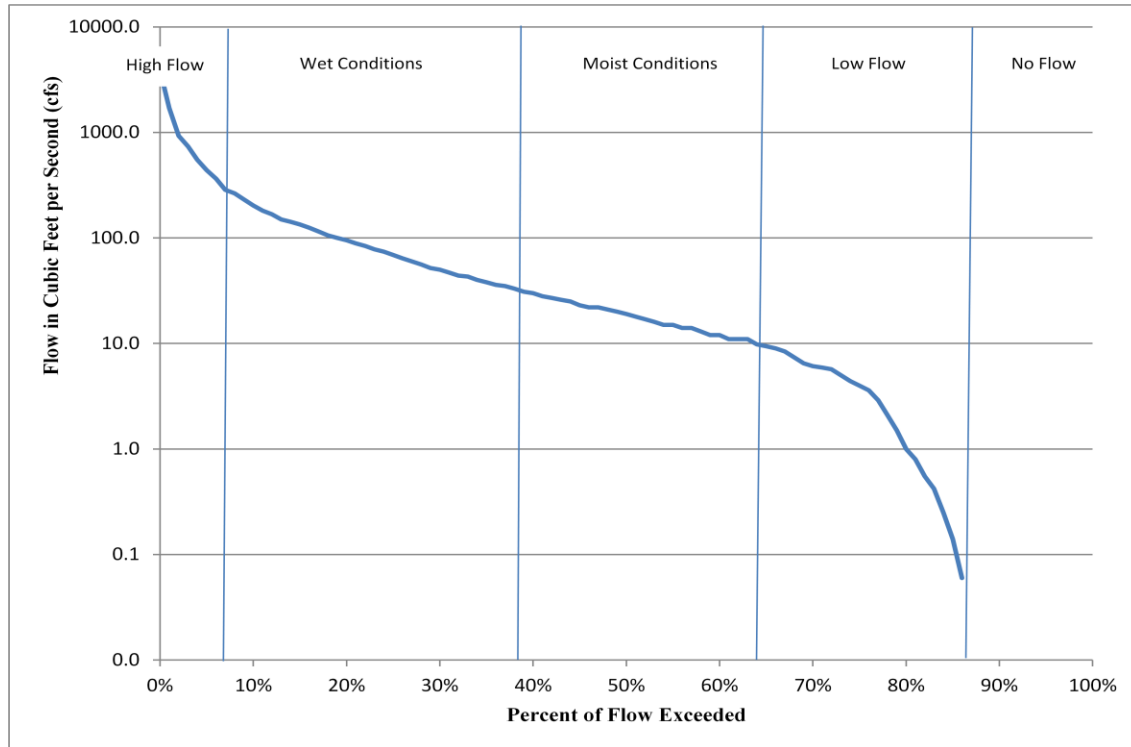

**Figure 8. Flow Duration Curve for the Sheyenne River Monitoring Station 385505 (USGS Station 05055300).**

### 5.3 Load Duration Analysis

An important factor in determining NPS pollution loads is variability in stream flows and loads associated with high and low flow. To better correlate the relationship between the pollutant of concern and the hydrology of the Section 303(d) TMDL listed segments, a load duration curve was developed for this impaired reach of the Sheyenne River. The load duration curve for the impaired reach was derived using the E. coli bacteria TMDL target of 126 CFU/100 mL and the flows generated as described in Sections 5.1 and 5.2.

Observed in-stream E. coli bacteria data obtained from monitoring site 385505 in 2009 and 2010 (Appendix A) were converted to a pollutant load by multiplying E. coli bacteria concentrations by the mean daily flow and a conversion factor. These loads are plotted against the percent exceeded of the flow on the day of sample collection (Figure 9). Points plotted above the 126 CFU/100 mL target curve exceed the State water quality target. Points plotted below the curve are meeting the State water quality target of 126 CFU/100 mL.

For each flow interval or zone, a regression relationship was developed between the samples which occur above the TMDL target (126 CFU/100 mL) curve and the corresponding percent exceeded flow. The load duration curve for site 385505 depicting a regression relationship for each flow interval is provided in Figure 9.

The regression lines for the wet condition and moist condition flow regimes for site 385505 were then used with the midpoint of the percent exceeded flow for that interval to



calculate the existing E. coli bacteria load for that flow interval. For example, the regression relationship between observed E. coli bacteria loading and percent exceeded flow for the wet and moist condition flow intervals of Figure 9 are:

$$\text{E. coli bacteria load (expressed as } 10^7 \text{ CFUs/day)} = \text{antilog} (\text{Intercept} + (\text{Slope} * \text{Percent Exceeded Flow}))$$


Where the midpoint of the wet condition interval from 7 to 39 percent is 23 percent, the existing E. coli bacteria load is:

$$\begin{aligned} \text{E. coli bacteria load (} 10^7 \text{ CFUs/day)} &= \text{antilog} (5.61 + (-3.66 * 0.23)) \\ &= 59,006 \text{ } 10^7 \text{ CFUs/day} \end{aligned}$$

Where the midpoint of the moist condition interval from 39 to 64 percent is 51 percent, the existing E. coli bacteria load is:

$$\begin{aligned} \text{E. coli bacteria load (} 10^7 \text{ CFUs/day)} &= \text{antilog} (5.45 + (-2.32 * 0.51)) \\ &= 17,823 \times 10^7 \text{ CFUs/day} \end{aligned}$$

The midpoint for the flow intervals is also used to estimate the TMDL target load. In the case of the previous examples, the TMDL target load for the midpoints, or 23 and 51 percent exceeded flow, derived from the 126 CFU/100 mL TMDL target curves are  $24,048 \times 10^7$  CFUs/day, and  $5,241 \times 10^7$  CFUs/day, respectively.

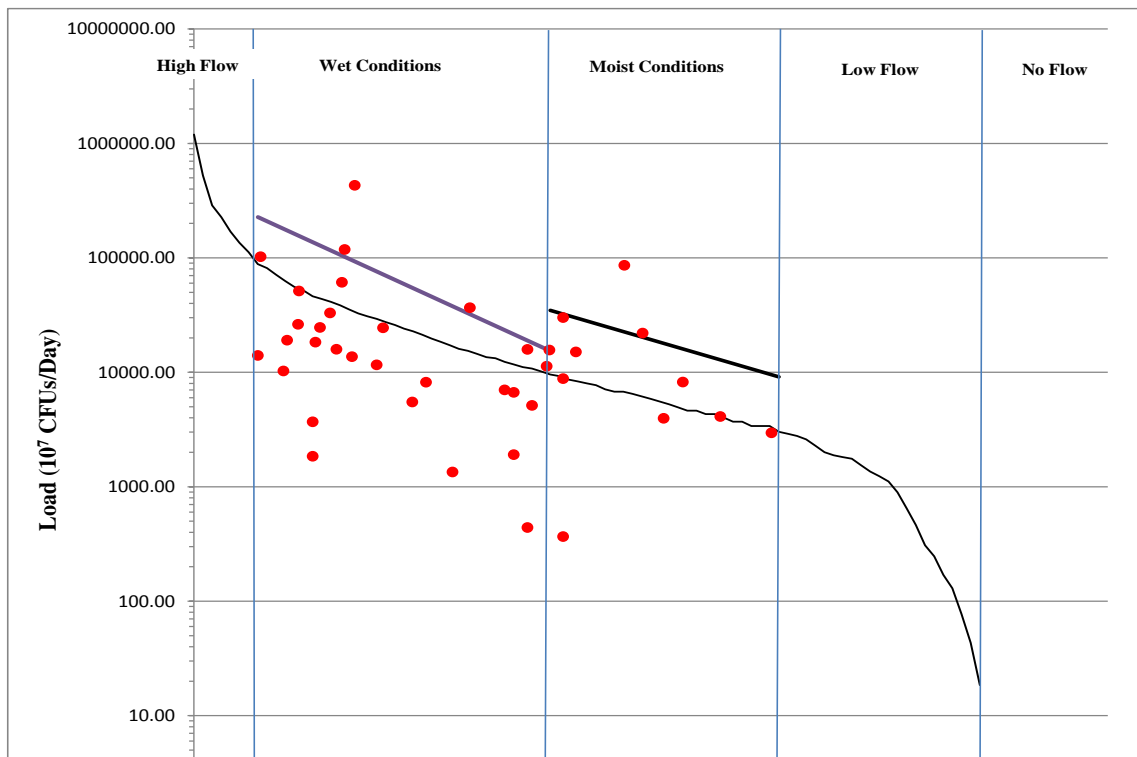

**Figure 9. E. coli Bacteria Load Duration Curve for the Sheyenne River Monitoring Station 385505.**

### 5.4 Loading Sources

The load reductions needed for the E. coli bacteria TMDL for this impaired reach of the Sheyenne River can generally be allotted to nonpoint sources. Based on the data available, the general focus of BMPs and load reductions for the listed waterbody should be on riparian grazing adjacent to or in close proximity to the Sheyenne River. Significant sources of E. coli bacteria loading were defined as nonpoint source pollution originating from livestock. One of the more important concerns regarding nonpoint sources is variability in stream flows. Variable stream flows often cause different source areas and loading mechanisms to dominate (Cleland, 2003). Two flow regimes, wet and moist conditions, were used in the development of the load duration curve for the listed segment on the Sheyenne River (Figure 9). The two flow regimes were used because samples indicated exceedences of the water quality standard during these periods of moderate flows.

By relating runoff characteristics to each flow regime one can infer which sources are most likely to contribute to E. coli bacteria loading. Animals grazing in the riparian area contribute E. coli bacteria by depositing manure where it has an immediate impact on water quality. Due to the close proximity of manure to the stream or by direct deposition in the stream, riparian grazing impacts water quality at high, moderate, and low flows (Table 5). In contrast, intensive grazing of livestock in the upland and not in the riparian area has a high potential to impact water quality at high flows and under moist conditions impact at moderate flows (Table 5). Exclusion of livestock from the riparian area eliminates the potential of direct manure deposit and therefore is considered to be of high importance at all flows. However, intensive grazing in the upland creates the potential for manure accumulation and availability for runoff at high flows and a high potential for E. coli bacteria contamination.

**Table 5. Nonpoint Sources of Pollution and Their Potential to Pollute at a Given Flow Regime.**

Nonpoint Sources	Flow Regime		
	High Flow	Moderate Flows	Low Flows/ Dry Conditions
Riparian Area Grazing (Livestock)	H	H	H
Animal Feeding Operations	H	M	L
Manure Application to Crop and Range Land	H	M	L
Intensive Upland Grazing (Livestock)	H	M	L

Note: Potential importance of nonpoint source area to contribute E. coli bacteria loads under a given flow regime. (H: High; M: Medium; L: Low)

## 6.0 MARGIN OF SAFETY AND SEASONALITY

### 6.1 Margin of Safety

Section 303(d) of the Clean Water Act and the U.S. Environmental Protection Agency (EPA) regulations require that “TMDLs shall be established at levels necessary to attain and maintain the applicable narrative and numerical water quality standards with seasonal variations and a margin of safety which takes into account any lack of knowledge

concerning the relationship between effluent limitations and water quality.” The margin of safety (MOS) can be either incorporated into conservative assumptions used to develop the TMDL (implicit) or added to a separate component of the TMDL (explicit).

To account for the uncertainty associated with known sources and the load reductions necessary to reach the TMDL target of 126 CFU/100 mL, a ten percent explicit margin of safety was used for this TMDL. The MOS was calculated as ten percent of the TMDL. In other words ten percent of the TMDL is set aside from the load allocation as a MOS. The ten percent MOS was derived by taking the difference between the points on the load duration curve using the 126 CFU/100 mL standard and the curve using the 113 CFU/100 mL.

## 6.2 Seasonality

Section 303(d)(1)(C) of the Clean Water Act and associated regulations require that a TMDL be established with seasonal variations. The Sheyenne River TMDL addresses seasonality because the flow duration curve was developed using seven years of USGS gauge data encompassing all twelve months of the year. Additionally, the water quality standard is seasonally based on the recreation season from May 1 to September 30 and controls will be designed to reduce E. coli bacteria loads during the seasons covered by the standard.

## 7.0 TMDL

Table 6 provides an outline of the critical elements of the bacteria TMDL for the impaired segment. TMDL for the Sheyenne River (ND-090200202-004-S\_00) is summarized in Table 7. The TMDL provides a summary of average daily loads by flow regime necessary to meet the water quality target (i.e., TMDL). The TMDL for each segment and flow regime provide an estimate of the existing daily load, an estimate of the average daily loads necessary to meet the water quality target (i.e., TMDL load). The TMDL load includes a load allocation from known nonpoint sources and a ten percent margin of safety.

**Table 6. TMDL Summary for the Sheyenne River.**

Category	Description	Explanation
Beneficial Use Impaired	Recreation	Contact Recreation (e.g., swimming, fishing)
Pollutants	E. coli Bacteria	See Section 2.1
E. coli TMDL Target	126 CFU/100 mL	Based on the current State water quality standard for E. coli bacteria.
Significant Sources	Nonpoint Sources	No contributing point sources in Subwatershed
Margin of Safety (MOS)	Explicit	10%

It should be noted that the TMDL loads, load allocations, and the MOS are estimated based on available data and reasonable assumptions and are to be used as a guide for implementation. The actual reduction needed to meet the applicable water quality standards may be higher or lower depending on the results of future monitoring.

$$\text{TMDL} = \text{LC} = \text{WLA} + \text{LA} + \text{MOS}$$

Where:

LC = loading capacity, or the greatest loading a waterbody can receive without violating water quality standards;

WLA = wasteload allocation, or the portion of the TMDL allocated to existing or future point sources;

LA = load allocation, or the portion of the TMDL allocated to existing or future non-point sources;

MOS = margin of safety, or an accounting of the uncertainty about the relationship between pollutant loads and receiving water quality. The margin of safety can be provided implicitly through analytical assumptions or explicitly by reserving a portion of the loading capacity.

**Table 7. E. coli Bacteria TMDL (10<sup>7</sup> CFU/day) for the Sheyenne River Assessment Unit ID ND-09020202-004-S\_00 as Represented by Site 385505.**

	Flow Regime			
	High Flow	Wet Conditions	Moist Conditions	Low Flow
<b>Existing Load</b>		59,031	17,828	
<b>TMDL</b>	256,822 <sup>1</sup>	24,048	5,241	1,233 <sup>1</sup>
<b>WLA</b>	No Reduction Necessary	0	0	No Reduction Necessary
<b>LA</b>		21,643	4,717	
<b>MOS</b>		2,405	524	

<sup>1</sup>TMDL load is provided as a guideline for watershed management and BMP implementation.

## 8.0 ALLOCATION

There are no known point sources impacting the watershed of this impaired reach. Therefore the entire E. coli bacteria load for this TMDL was allocated to nonpoint sources in the watershed. The entire nonpoint source load is allocated as a single load because there is not enough detailed source data to allocate the load to individual uses (e.g., animal feeding, septic systems, riparian grazing, waste management).

To achieve the TMDL targets identified in the report, it will require the wide spread support and voluntary participation of landowners and residents in the watershed. The TMDL plan described

in this report is a designed to improve water quality by implementing best management practices through non-regulatory approaches. “Best management practices” (BMPs) are methods, measures, or practices that are determined to be a reasonable and cost effective means for a land owner to meet nonpoint source pollution control needs,” (EPA, 2001). This TMDL plan is put forth as a recommendation for what needs to be accomplished for this impaired reach of the Sheyenne River, and its associated watershed, to restore and maintain its recreational uses. Water quality monitoring should continue in order to measure BMP effectiveness and determine through adaptive management if loading allocation recommendations need to be adjusted.

Nonpoint source pollution is the sole contributor to elevated E. coli bacteria levels in the Sheyenne River. Different BMPs can be effective at one or more flow regimes (Table 8). The E. coli bacteria samples and load duration curve analysis of the impaired reach (ND-09020202-004-S) identified wet and moist condition flow regimes as the flows where E. coli bacteria exceeded the 126 CFU/100 mL target. To reduce NPS pollution for different flow regimes, specific BMPs are described in Section 8.1 that will mitigate the effects of E. coli bacteria loading to the impaired reach.

**Table 8. Management Practices and Flow Regimes Affected by Implementation of BMPs.**

Management Practice	Flow Regime and Expected Reduction		
	High Flow 70% Reduction	Moderate Flow 80% Reduction	Low Flow 74% Reduction
Livestock Exclusion From Riparian Area	X	X	X
Water Well and Tank Development	X	X	X
Prescribed Grazing	X	X	X
Waste Management System	X	X	
Vegetative Filter Strip		X	
Septic System Repair		X	X

Controlling nonpoint sources is an immense undertaking requiring extensive financial and technical support. Provided that technical/financial assistance is available to stakeholders, these BMPs have the potential to significantly reduce E.coli bacteria loading to the river. The following sections describe in detail those BMPs that will reduce E. coli bacteria levels in Sheyenne River.

### 8.1 Livestock Management Recommendations

Livestock management BMPs are designed to promote healthy water quality and riparian areas through management of livestock and associated grazing land. Fecal matter from livestock, erosion from poorly managed grazing land and riparian areas can be a significant source of E. coli bacteria loading to surface water. Precipitation, plant cover, number of animals, and soils are factors that affect the amount of bacteria delivered to a waterbody because of livestock. Several specific BMPs are known to reduce nonpoint source pollution from livestock. These BMPs include:

Livestock exclusion from riparian areas- This practice is established to remove livestock from grazing riparian areas and watering in the stream. Livestock exclusion is accomplished through fencing. A reduction in stream bank erosion can be expected by minimizing or eliminating hoof trampling. A stable stream bank will support vegetation

that will hold banks in place and serve a secondary function as a filter from nonpoint source runoff. Added vegetation will create aquatic habitat and shading for macroinvertebrates and fish. Direct deposit of fecal matter into the stream and stream banks will be eliminated as a result of livestock exclusion by fencing.

Water well and tank development- Fencing animals from stream access requires an alternative water source. Installing water wells and tanks satisfies this need. Installing water tanks provides a quality water source and keeps animals from wading and defecating in streams. This will reduce the probability of pathogenic infections to livestock and the public.

Prescribed grazing- This practice is used to increase ground cover and ground stability by rotating livestock throughout multiple fields. Grazing with a specified rotation minimizes overgrazing and resulting erosion. The Natural Resource Conservation Service (NRCS) recommends grazing systems to improve and maintain water quality and quantity. Duration, intensity, frequency, and season of grazing can be managed to enhance vegetation cover and litter, resulting in reduced runoff, improved infiltration, increased quantity of soil water for plant growth, and better manure distribution and increased rate of decomposition, (NRCS, 1998). In a study by Tiedemann et al. (1988), as presented by EPA (1993), the effects of four grazing strategies on bacteria levels in thirteen watersheds in Oregon were studied during the summer of 1984. Results of the study (Table 9) showed that when livestock are managed at a stocking rate of 19 acres per animal unit month, with water developments and fencing, bacteria levels were reduced significantly.

**Table 9. Bacterial Water Quality Response to Four Grazing Strategies (Tiedemann et al., 1988).**

Grazing Strategy		Geometric Mean Bacteria Count
Strategy A:	Ungrazed	40/L
Strategy B:	Grazing without management for livestock distribution; 20.3 ac/AUM.	150/L
Strategy C:	Grazing with management for livestock distribution: fencing and water developments; 19.0 ac/AUM	90/L
Strategy D:	Intensive grazing management, including practices to attain uniform livestock distribution and improve forage production with cultural practices such as seeding, fertilizing, and forest thinning; 6.9 ac/AUM	950/L

Waste management system- Waste management systems can be effective in controlling up to 90 percent of bacteria loading originating from confined animal feeding areas. Results from a study by Pennsylvania State University (1992) as presented by EPA (1993) (Table 10), suggest that waste management systems are capable of removing up to 85 percent of bacteria loading to rivers and streams. A waste management system is made up of various components designed to control nonpoint source pollution from

concentrated animal feeding operations (CAFOs) and animal feeding operations (AFOs). Diverting clean water from the feeding area and containing dirty water from the feeding area in a pond are typical practices of a waste management system. Manure handling and application of manure is designed to be adaptive to environmental, soil, and plant conditions to minimize the probability of contamination of surface water.

**Table 10. Relative Gross Effectiveness<sup>a</sup> of Confined Livestock Control Measures (Pennsylvania State University, 1992).**

Practice <sup>b</sup> Category	Runoff <sup>c</sup> Volume	Total <sup>d</sup> Phosphorus (%)	Total <sup>d</sup> Nitrogen (%)	Sediment (%)	Fecal Bacteria (%)
Animal Waste System <sup>e</sup>	-	90	80	60	85
Diversion System <sup>f</sup>	-	70	45	NA	NA
Filter Strips <sup>g</sup>	-	85	NA	60	55
Terrace System	-	85	55	80	NA
Containment Structures <sup>h</sup>	-	60	65	70	90

NA = Not Available.

<sup>a</sup> Actual effectiveness depends on site-specific conditions. Values are not cumulative between practice categories.

<sup>b</sup> Each category includes several specific types of practices.

<sup>c</sup> - = reduction; + = increase; 0 = no change in surface runoff.

<sup>d</sup> Total phosphorus includes total and dissolved phosphorus; total nitrogen includes organic-N, ammonia-N, and nitrate-N.

<sup>e</sup> Includes methods for collecting, storing, and disposing of runoff and process-generated wastewater.

<sup>f</sup> Specific practices include diversion of uncontaminated water from confinement facilities.

<sup>g</sup> Includes all practices that reduce contaminant losses using vegetative control measures.

<sup>h</sup> Includes such practices as waste storage ponds, waste storage structures, waste treatment lagoons.

## 8.2 Other Recommendations

Vegetative filter strip- Vegetated filter strips are used to reduce the amount of sediment, particulate organics, dissolved contaminants, nutrients, and in the case of this TMDL, E. coli bacteria to streams. The effectiveness of filter strips and other BMPs in removing E. coli bacteria is quite successful. Study results (Table 10) suggest that vegetative filter strips are capable of removing up to 55 percent of bacteria loading to rivers and streams. The ability of the filter strip to remove contaminants is dependent on field slope, filter strip slope, erosion rate, amount and particulate size distribution of sediment delivered to the filter strip, density and height of vegetation, and runoff volume associated with erosion producing events (NRCS, 2001).

Septic System – Septic systems provide an economically feasible way of disposing of household wastes where other means of waste treatment are unavailable (e.g., public or private treatment facilities). The basis for most septic systems involves the treatment and distribution of household wastes through a series of steps involving the following:

1. A sewer line connecting the house to a septic tank
2. A septic tank that allows solids to settle out of the effluent
3. A distribution system that dispenses the effluent to a leach field
4. A leaching system that allows the effluent to enter the soil

Septic system failure occurs when one or more components of the septic system do not work properly and untreated waste or wastewater leaves the system. Wastes may pond in the leach field and ultimately run off directly into nearby streams or percolate into

groundwater. Untreated septic system waste is a potential source of nutrients (nitrogen and phosphorus), organic matter, suspended solids, and fecal bacteria. Land application of septic system sludge, although unlikely, may also be a source of contamination.

Septic system failure can occur for several reasons, although the most common reason is improper maintenance (e.g., age, inadequate pumping). Other reasons for failure include improper installation, location, and choice of system. Harmful household chemicals can also cause failure by killing the bacteria that digest the waste. While the number of systems that are not functioning properly is unknown, it is estimated that 28 percent of the systems in North Dakota are failing (EPA, 2002).

## **9.0 PUBLIC PARTICIPATION**

To satisfy the public participation requirements of this TMDL, a letter was sent to the following agencies and/or organizations notifying them that the draft report was available for review and public comment. Those included in the mailing are as follows:

- Benson, Eddy, and Wells County Soil Conservation Districts;
- Benson, Eddy, and Wells County Water Resource Boards;
- Natural Resource Conservation Service (State Office); and
- U.S. Environmental Protection Agency, Region VIII

In addition to mailing copies of this TMDL for the Sheyenne River interested parties, the TMDL was posted on the North Dakota Department of Health, Division of Water Quality web site at [http://www.ndhealth.gov/WQ/SW/Z2\\_TMDL/TMDLs Under PublicComment/B Under Public Comment.html](http://www.ndhealth.gov/WQ/SW/Z2_TMDL/TMDLs_Under_PublicComment/B_Under_PublicComment.html). A 30 day public notice soliciting comment and participation was also published in the Benson County Farmers Press (serving Benson County), the New Rockford Transcript (serving Eddy County), and the Herald Press (serving Wells County).

As part of its normal review, a public notice review was received from the US EPA Region 8 (Appendix D). No comments were received from any other agency, organization or individual.

## **10.0 MONITORING**

As stated previously, it should be noted that the TMDL loads, load allocations, and the MOS are estimated based on available data and reasonable assumptions and are to be used as a guide for implementation. The actual reduction needed to meet the applicable water quality standards may be higher or lower depending on the results of future monitoring.

Specifically, monitoring will be conducted for the variables that are currently causing impairments to the beneficial uses of the waterbody. Once a watershed restoration plan (e.g. 319 PIP) is implemented, monitoring will be conducted in the stream beginning two years after implementation and extending five years after the implementation project is complete.

## **11.0 TMDL IMPLEMENTATION STRATEGY**

Implementation of TMDLs is dependent upon the availability of Section 319 NPS funds or other watershed restoration programs (e.g. USDA EQIP), as well as securing a local project sponsor



and the required matching funds. Provided these three requirements are in place, a project implementation plan (PIP) is developed in accordance with the TMDL and submitted to the North Dakota Nonpoint Source Pollution Task Force and EPA for approval. The implementation of the best management practices contained in the NPS PIP is voluntary. Therefore, success of any TMDL implementation project is ultimately dependent on the ability of the local project sponsor to find cooperating producers.

Monitoring is an important and required component of any PIP. As a part of the PIP, data are collected to monitor and track the effects of BMP implementation as well as to judge overall project success. Quality Assurance Project Plans (QAPPs) detail the strategy of how, when and where monitoring will be conducted to gather the data needed to document the TMDL implementation goal(s). As data are gathered and analyzed, watershed restoration tasks are adapted to place BMPs where they will have the greatest benefit to water quality.

---

## 12.0 REFERENCES

- Cleland. 2003. *TMDL Development from the “Bottom Up” – Part III: Duration Curves and Wet Weather Assessment*. America’s Clean Water Foundation, Washington, D.C.
- NDAWN. 2012. Harvey, North Dakota Weather Station. North Dakota Agriculture Weather Network. North Dakota State University, Fargo, North Dakota. Available at <http://ndawn.ndsu.nodak.edu/index.html>
- NDDoH. 2010. *North Dakota 2010 Integrated Section 305(b) Water Quality Assessment Report and Section 303(d) List of Waters Needing Total Maximum Daily Loads*. North Dakota Department of Health, Division of Water Quality. Bismarck, North Dakota.
- NDDoH. 2011. *Standards of Quality for Waters of the State*. Chapter 33-16-02 of the North Dakota Century Code. North Dakota Department of Health, Division of Water Quality. Bismarck, North Dakota.
- NRCS. 1998. *Natural Resources Conservation Service Practice Specification 528*. USDA-Natural Resources Conservation Service, North Dakota. Available at <http://efotg.nrcs.usda.gov>
- NRCS. 2001. *Natural Resources Conservation Service Practice Specification 393 – Filter Strip (Acres)* [Online]. USDA – Natural Resources Conservation Service, North Dakota. Available at <http://www.nd.nrcs.usda.gov/resources/section4/standards/Section4.html>.
- Pennsylvania State University. 1992. Nonpoint Source Database. Pennsylvania State University, Department of Agricultural and Biological Engineering, University Park, PA.
- Ries, K. G., III and P.J. Friesz. 2000. *Methods for Estimating Low-Flow Statistics for Massachusetts Streams*. U.S. Geological Survey Water Resources Investigations Report 00-4135. U.S. Geological Survey, Reston, VA.
- Tiedemann, A.R., D.A. Higgins, T.M. Quigley, H.R. Sanderson, and C. C. Bohn.1988. *Bacterial Water Quality Responses to Four Grazing Strategies – Comparison with Oregon Standards*.
- USEPA. 1986. *Ambient Water Quality Criteria for Bacteria-1986*. EPA-A440-5-84-002. U.S. Environmental Protection Agency, Washington, D.C.
- USEPA. 1993. *Guidance Specifying Management Measures for Sources of Nonpoint Pollution in Coastal Waters*. EPA 840-B-92-002. U.S. Environmental Protection Agency, Office of Water, Washington, D.C.
- USEPA. 2001. *Protocol for Developing Pathogen TMDLs*. EPA 841-R-00-002. U.S. Environmental Protection Agency, Office of Water, Washington, D.C.
- USEPA. 2002. *Onsite Wastewater Treatment Systems Manual*. EPA/625/R-00/008. U. S. Environmental Protection Agency. Office of Water, Office of Research and Development.

USEPA. 2007. An Approach for Using Load Duration Curves in the Development of TMDLs. EPA-841-B-07-006. U.S. Environmental Protection Agency, Office of Water, Washington, DC. Available at <http://www.epa.gov/owow/tmdl/techsupp.html>

USGS. 2006. *Ecoregions of North Dakota and South Dakota*. United States Geological Survey. Available at <http://www.npwrc.usgs.gov/resource/habitat/ndsdeco/nodak.html>.


**Appendix A**  
**E. coli Bacteria Data Collected for Sites 385505 and 385502**

385505										
	May		June		July		August		September	
	5/13/2009	20	6/3/2009	40	7/8/2009	110	8/3/2009	60	9/1/2009	450
	5/20/2009	20	6/10/2009	10	7/13/2009	30	8/13/2009	200	9/9/2009	210
	5/27/2009	150	6/17/2009	70	7/22/2009	10	8/18/2009	70	9/15/2009	90
	5/25/2010	120	6/23/2009	1600	7/28/2009	70	8/25/2009	120	9/23/2009	120
			6/30/2009	50	7/6/2010	50	8/3/2010	180	9/30/2009	110
			6/2/2010	10	7/14/2010	300	8/10/2010	10	9/7/2010	410
			6/8/2010	50	7/20/2010	20	8/17/2010	140	9/14/2010	400
			6/15/2010	50	7/27/2010	5	8/24/2010	220	9/21/2010	50
			6/22/2010	200			8/31/2010	1200	9/28/2010	100
			6/30/2010	60						
N		4		10		8		9		9
Geometric Mean		52		61		37		124		165
% Exceed 409 CFU/100 mL		0%		10%		0%		11%		22%
Recreational Use Assessment	Insufficient Data		Fully Supporting But Threatened		Fully Supporting		Fully Supporting But Threatened		Not Supporting	

385502										
	May		June		July		August		September	
	5/13/2009	10	6/3/2009	50	7/8/2009	10	8/3/2009	10	9/1/2009	1400
	5/20/2009	120	6/10/2009	30	7/13/2009	30	8/13/2009	90	9/9/2009	220
	5/27/2009	30	6/17/2009	90	7/22/2009	20	8/18/2009	50	9/15/2009	160
	5/25/2010	370	6/23/2009	60	7/28/2009	20	8/25/2009	110	9/23/2009	170
			6/30/2009	10	7/6/2010	10	8/3/2010	30	9/30/2009	30
			6/2/2010	10	7/14/2010	480	8/10/2010	40	9/7/2010	400
			6/8/2010	30	7/20/2010	120	8/17/2010	10	9/14/2010	40
			6/15/2010	100	7/27/2010	800	8/24/2010	80	9/21/2010	10
			6/22/2010	200			8/31/2010	270	9/28/2010	40
			6/30/2010	170						
N		4		10		8		9		9
Geometric Mean		60		49		52		48		105
% Exceed 409 CFU/100 mL		0%		0%		25%		0%		11%
Recreational Use Assessment	Insufficient Data		Fully Supporting		Fully Supporting But Threatened		Fully Supporting		Fully Supporting But Threatened	

**Appendix B**  
**Flow Duration Curve for Site 385505**

Site 385505

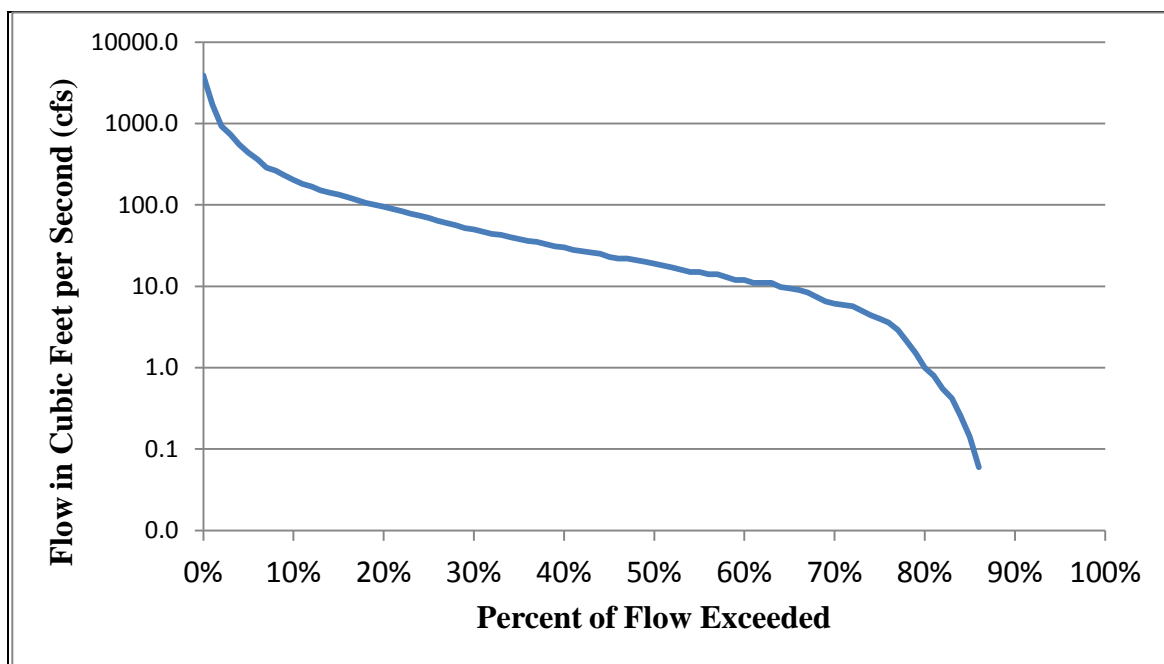


**Appendix C**  
**Load Duration Curve, Estimated Load, TMDL Target,**  
**and Percent Load Reduction Required for**  
**Site 385505**





# Site 385505 Sheyenne River

	Load ( $10^7$ CFUs/Day)				Load ( $10^7$ CFUs/Period)		
	Median Percentile	Existing	TMDL	Days	Existing	TMDL	Percent Reduction
<b>Wet</b>	23.00%	59031.34	24048.12	116.80			
<b>Moist</b>	51.50%	17827.83	5241.26	91.25	1626789.40	478264.72	70.60%
			<b>Total</b>	208	1626789	478265	70.60%

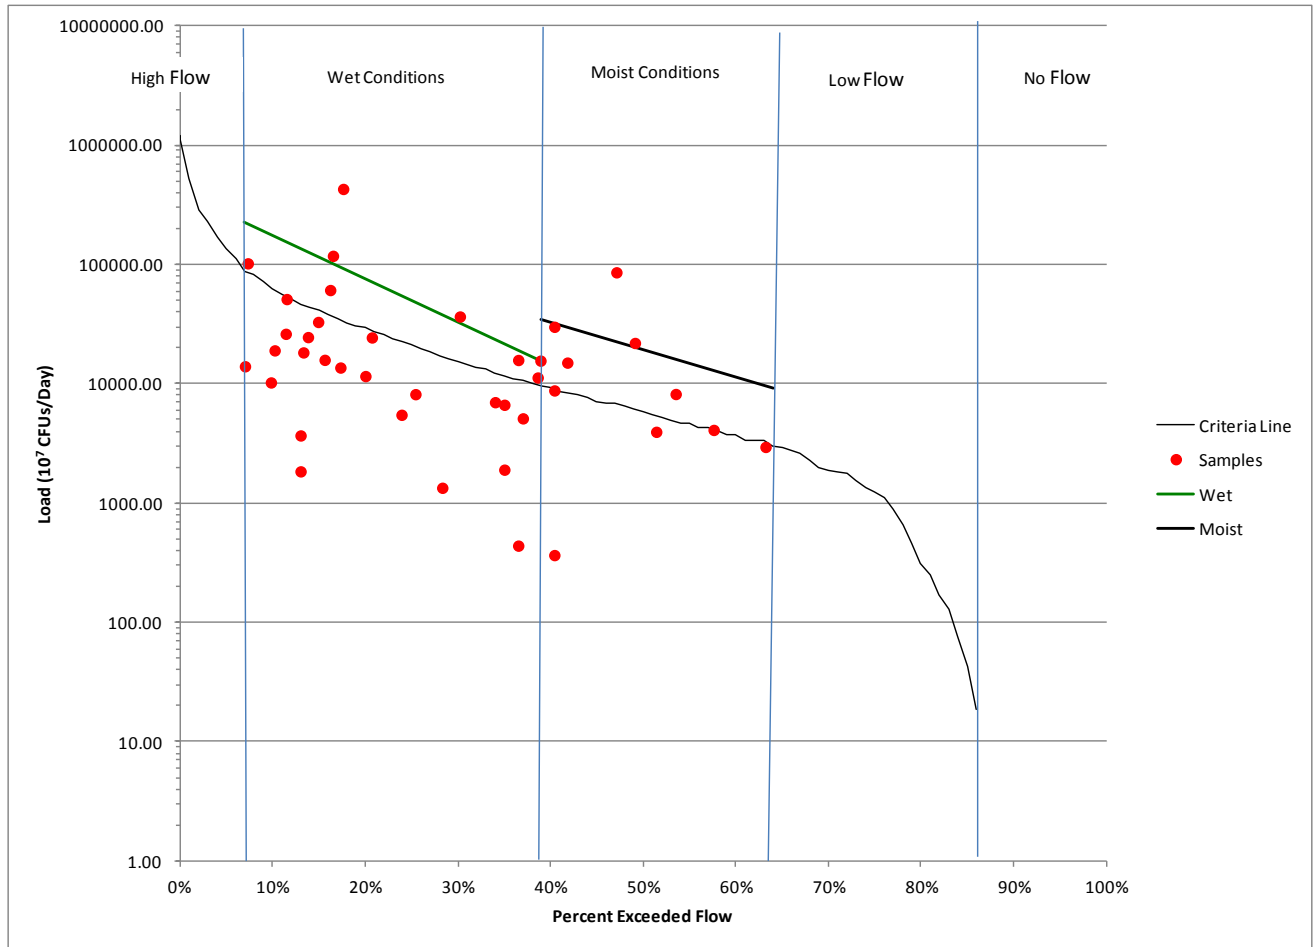

**Appendix D**  
**US EPA Region 8 TMDL Public Review**  
**Form and Decision Document**

## EPA REGION 8 TMDL REVIEW FORM AND DECISION DOCUMENT

TMDL Document Info:

<b>Document Name:</b>	<b>E. coli Bacteria TMDL for the Sheyenne River in Benson, Eddy and Wells Counties, North Dakota</b>
<b>Submitted by:</b>	<b>Mike Ell, North Dakota Department of Health</b>
<b>Date Received:</b>	<b>August 10, 2012</b>
<b>Review Date:</b>	<b>September 19, 2012</b>
<b>Reviewer:</b>	<b>Vern Berry, US Environmental Protection Agency</b>
<b>Rough Draft / Public Notice / Final Draft?</b>	<b>Public Notice</b>
<b>Notes:</b>	

Reviewers Final Recommendation(s) to EPA Administrator (used for final draft review only):

- Approve
- Partial Approval
- Disapprove
- Insufficient Information

### Approval Notes to the Administrator:

This document provides a standard format for EPA Region 8 to provide comments to state TMDL programs on TMDL documents submitted to EPA for either formal or informal review. All TMDL documents are evaluated against the TMDL review elements identified in the following 8 sections:

1. Problem Description
  - a. ...TMDL Document Submittal
  - b. Identification of the Waterbody, Impairments, and Study Boundaries
  - c. Water Quality Standards
2. Water Quality Target
3. Pollutant Source Analysis
4. TMDL Technical Analysis
  - a. Data Set Description
  - b. Waste Load Allocations (WLA)
  - c. Load Allocations (LA)
  - d. Margin of Safety (MOS)
  - e. Seasonality and variations in assimilative capacity
5. Public Participation
6. Monitoring Strategy
7. Restoration Strategy
8. Daily Loading Expression

Under Section 303(d) of the Clean Water Act, waterbodies that are not attaining one or more water quality standard (WQS) are considered "impaired." When the cause of the impairment is determined to be a pollutant, a TMDL analysis is required to assess the appropriate maximum allowable pollutant loading rate. A TMDL document consists of a technical analysis conducted to: (1) assess the maximum pollutant loading rate that a waterbody is able to assimilate while maintaining water quality standards; and (2) allocate that assimilative capacity among the known sources of that

pollutant. A well written TMDL document will describe a path forward that may be used by those who implement the TMDL recommendations to attain and maintain WQS.

Each of the following eight sections describes the factors that EPA Region 8 staff considers when reviewing TMDL documents. Also included in each section is a list of EPA's review elements relative to that section, a brief summary of the EPA reviewer's findings, and the reviewer's comments and/or suggestions. Use of the verb "must" in this review form denotes information that is required to be submitted because it relates to elements of the TMDL required by the CWA and by regulation. Use of the term "should" below denotes information that is generally necessary for EPA to determine if a submitted TMDL is approvable.

This review form is intended to ensure compliance with the Clean Water Act and that the reviewed documents are technically sound and the conclusions are technically defensible.

# 1. Problem Description

A TMDL document needs to provide a clear explanation of the problem it is intended to address. Included in that description should be a definitive portrayal of the physical boundaries to which the TMDL applies, as well as a clear description of the impairments that the TMDL intends to address and the associated pollutant(s) causing those impairments. While the existence of one or more impairment and stressor may be known, it is important that a comprehensive evaluation of the water quality be conducted prior to development of the TMDL to ensure that all water quality problems and associated stressors are identified. Typically, this step is conducted prior to the 303(d) listing of a waterbody through the monitoring and assessment program. The designated uses and water quality criteria for the waterbody should be examined against available data to provide an evaluation of the water quality relative to all applicable water quality standards. If, as part of this exercise, additional WQS problems are discovered and additional stressor pollutants are identified, consideration should be given to concurrently evaluating TMDLs for those additional pollutants. If it is determined that insufficient data is available to make such an evaluation, this should be noted in the TMDL document.

## 1.1 TMDL Document Submittal

When a TMDL document is submitted to EPA requesting review or approval, the submittal package should include a notification identifying the document being submitted and the purpose of the submission.

Review Elements:

- Each TMDL document submitted to EPA should include a notification of the document status (e.g., pre-public notice, public notice, final), and a request for EPA review.
- Each TMDL document submitted to EPA for final review and approval should be accompanied by a submittal letter that explicitly states that the submittal is a final TMDL submitted under Section 303(d) of the Clean Water Act for EPA review and approval. This clearly establishes the State's/Tribe's intent to submit, and EPA's duty to review, the TMDL under the statute. The submittal letter should contain such identifying information as the name and location of the waterbody and the pollutant(s) of concern, which matches similar identifying information in the TMDL document for which a review is being requested.

Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information    N/A

***Summary:*** *The notification of the availability of the public notice draft TMDL document was submitted to EPA via a letter received on August 10, 2012. The letter includes the details of the public notice, explains how to obtain a copy of the TMDL, and requests the submittal of comments to NDDoH by September 13, 2012.*

***Comments:*** *No comments.*

## 1.2 Identification of the Waterbody, Impairments, and Study Boundaries

The TMDL document should provide an unambiguous description of the waterbody to which the TMDL is intended to apply and the impairments the TMDL is intended to address. The document should also clearly delineate the physical boundaries of the waterbody and the geographical extent of the watershed area studied. Any additional information needed to tie the TMDL document back to a current 303(d) listing should also be included.

### Review Elements:

- The TMDL document should clearly identify the pollutant and waterbody segment(s) for which the TMDL is being established. If the TMDL document is submitted to fulfill a TMDL development requirement for a waterbody on the state's current EPA approved 303(d) list, the TMDL document submittal should clearly identify the waterbody and associated impairment(s) as they appear on the State's/Tribe's current EPA approved 303(d) list, including a full waterbody description, assessment unit/waterbody ID, and the priority ranking of the waterbody. This information is necessary to ensure that the administrative record and the national TMDL tracking database properly link the TMDL document to the 303(d) listed waterbody and impairment(s).
- One or more maps should be included in the TMDL document showing the general location of the waterbody and, to the maximum extent practical, any other features necessary and/or relevant to the understanding of the TMDL analysis, including but not limited to: watershed boundaries, locations of major pollutant sources, major tributaries included in the analysis, location of sampling points, location of discharge gauges, land use patterns, and the location of nearby waterbodies used to provide surrogate information or reference conditions. Clear and concise descriptions of all key features and their relationship to the waterbody and water quality data should be provided for all key and/or relevant features not represented on the map
- If information is available, the waterbody segment to which the TMDL applies should be identified/geo-referenced using the National Hydrography Dataset (NHD). If the boundaries of the TMDL do not correspond to the Waterbody ID(s) (WBID), Entity ID information or reach code (RCH\_Code) information should be provided. If NHD data is not available for the waterbody, an alternative geographical referencing system that unambiguously identifies the physical boundaries to which the TMDL applies may be substituted.

### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

### **Summary:**

#### ***Physical Setting and Listing History:***

*The impaired stream segment included in this TMDL document is the Sheyenne River from its confluence with Big Coulee downstream to its confluence with the Warsing Dam watershed (40.37 miles; ND-09020202-004-S\_00). This impaired stream segment lies within the Upper Sheyenne River sub-basin (HUC 09020202) in east-central North Dakota and is part of the larger Red River of the North drainage basin. The impaired segment is located in Benson, Eddy and Wells Counties which cover a watershed drainage area of approximately 342,826 acres. This segment of the Sheyenne River is listed as impaired for E. coli bacteria and is a high priority for TMDL development.*

CHAPTER 33-16-02.1, Appendix 1 of the North Dakota Century Code assigns the following classifications for the stream segment of the Sheyenne River included in this TMDL document. All tributaries not specifically mentioned in Appendix 1 are classified as Class III streams.

**Segment ND-09020202-004-S\_00 of the Sheyenne River is a Class IA stream.**

**Impairment status:**

The 2012 North Dakota Integrated Report identifies this segment of the Sheyenne River as not supporting the following beneficial uses:

<b>Stream Segment</b>	<b>Designated Use / Support Status</b>	<b>Impairment Cause</b>	<b>TMDL Priority</b>
<i>Sheyenne River ND-09020202-004-S_00</i>	<i>Recreation / Not Supporting</i>	<i>Escherichia coli</i>	<i>High</i>

**Comments:** *No comments.*



### 1.3 Water Quality Standards

TMDL documents should provide a complete description of the water quality standards for the waterbodies addressed, including a listing of the designated uses and an indication of whether the uses are being met, not being met, or not assessed. If a designated use was not assessed as part of the TMDL analysis (or not otherwise recently assessed), the documents should provide a reason for the lack of assessment (e.g., sufficient data was not available at this time to assess whether or not this designated use was being met).

Water quality criteria (WQC) are established as a component of water quality standard at levels considered necessary to protect the designated uses assigned to that waterbody. WQC identify quantifiable targets and/or qualitative water quality goals which, if attained and maintained, are intended to ensure that the designated uses for the waterbody are protected. TMDLs result in maintaining and attaining water quality standards by determining the appropriate maximum pollutant loading rate to meet water quality criteria, either directly, or through a surrogate measurable target. The TMDL document should include a description of all applicable water quality criteria for the impaired designated uses and address whether or not the criteria are being attained, not attained, or not evaluated as part of the analysis. If the criteria were not evaluated as part of the analysis, a reason should be cited (e.g. insufficient data were available to determine if this water quality criterion is being attained).

#### Review Elements:

- The TMDL must include a description of the applicable State/Tribal water quality standard, including the designated use(s) of the waterbody, the applicable numeric or narrative water quality criterion, and the anti-degradation policy. (40 C.F.R. §130.7(c)(1)).
- The purpose of a TMDL analysis is to determine the assimilative capacity of the waterbody that corresponds to the existing water quality standards for that waterbody, and to allocate that assimilative capacity between the identified sources. Therefore, all TMDL documents must be written to meet the existing water quality standards for that waterbody (CWA §303(d)(1)(C)).  
*Note: In some circumstances, the load reductions determined to be necessary by the TMDL analysis may prove to be infeasible and may possibly indicate that the existing water quality standards and/or assessment methodologies may be erroneous. However, the TMDL must still be determined based on existing water quality standards. Adjustments to water quality standards and/or assessment methodologies may be evaluated separately, from the TMDL.*
- The TMDL document should describe the relationship between the pollutant of concern and the water quality standard the pollutant load is intended to meet. This information is necessary for EPA to evaluate whether or not attainment of the prescribed pollutant loadings will result in attainment of the water quality standard in question.
- If a standard includes multiple criteria for the pollutant of concern, the document should demonstrate that the TMDL value will result in attainment of all related criteria for the pollutant. For example, both acute and chronic values (if present in the WQS) should be addressed in the document, including consideration of magnitude, frequency and duration requirements.

#### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

**Summary:** *The Sheyenne River stream segment addressed by this TMDL document is impaired based on E. coli concentrations impacting the recreational uses. This stream segment is given a classification of Class IA as defined by the NDDoH.*

***Class IA*** - *The quality of the waters in this class shall be the same as the quality of class I streams, except that where natural conditions exceed Class I criteria for municipal and domestic use, the availability of softening or other treatment methods may be considered in determining whether ambient water quality meets the drinking water requirements of the department.*

*Numeric criteria for E. coli in North Dakota, Class IA streams have been established and are presented in the excerpted Table 4 shown below. The E. coli bacteria standard applies only during the recreation season from May 1 to September 30. Discussion of additional applicable water quality standards for this stream segment can be found on pages 7 – 8 of the TMDL document.*

**Table 4. North Dakota Bacteria Water Quality Standards for Class IA Streams.**

Parameter	Standard	
	Geometric Mean <sup>1</sup>	Maximum <sup>2</sup>
E. coli Bacteria	126 CFU/100 mL	409 CFU/100 mL

<sup>1</sup>Expressed as a geometric mean of representative samples collected during any consecutive 30-day period

<sup>2</sup>No more than 10 percent of samples collected during any consecutive 30-day period shall individually exceed the standard.

**Comments:** *No comments.*

## 2. Water Quality Targets

TMDL analyses establish numeric targets that are used to determine whether water quality standards are being achieved. Quantified water quality targets or endpoints should be provided to evaluate each listed pollutant/water body combination addressed by the TMDL, and should represent achievement of applicable water quality standards and support of associated beneficial uses. For pollutants with numeric water quality standards, the numeric criteria are generally used as the water quality target. For pollutants with narrative standards, the narrative standard should be translated into a measurable value. At a minimum, one target is required for each pollutant/water body combination. It is generally desirable, however, to include several targets that represent achievement of the standard and support of beneficial uses (e.g., for a sediment impairment issue it may be appropriate to include a variety of targets representing water column sediment such as TSS, embeddedness, stream morphology, up-slope conditions and a measure of biota).

### Review Elements:

- The TMDL should identify a numeric water quality target(s) for each waterbody pollutant combination. The TMDL target is a quantitative value used to measure whether or not the applicable water quality standard is attained. *Generally, the pollutant of concern and the numeric water quality target are, respectively, the chemical causing the impairment and the numeric criteria for that chemical (e.g., chromium) contained in the water quality standard. Occasionally, the pollutant of concern is different from the parameter that is the subject of the numeric water quality target (e.g., when the pollutant of concern is phosphorus and the numeric water quality target is expressed as a numerical dissolved oxygen criterion). In such cases, the TMDL should explain the linkage between the pollutant(s) of concern, and express the quantitative relationship between the TMDL target and pollutant of concern. In all cases, TMDL targets must represent the attainment of current water quality standards.*
- When a numeric TMDL target is established to ensure the attainment of a narrative water quality criterion, the numeric target, the methodology used to determine the numeric target, and the link between the pollutant of concern and the narrative water quality criterion should all be described in the TMDL document. Any additional information supporting the numeric target and linkage should also be included in the document.

### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

**Summary:** *The water quality target for this TMDL is based on the numeric water quality standards for E. coli bacteria established to protect the recreational beneficial uses for the 40.37 mile stream segment of the Sheyenne River above its confluence with the Warsing Dam watershed. The E. coli standards are expressed in coliform forming units (cfu) per 100 milliliters (mL) of the water sample. The E. coli target for the impaired segment is: 126 cfu/100 mL during the recreation season from May 1 to September 30. While the standard is intended to be expressed as the 30-day geometric mean, the target for the stream segment was used to compare to values from single grab samples. This ensures that the reductions necessary to achieve the target will be protective of both the acute (single sample value) and chronic (geometric mean of 5 samples) standard.*

**Comments:** *No comments.*



### 3. Pollutant Source Analysis

A TMDL analysis is conducted when a pollutant load is known or suspected to be exceeding the loading capacity of the waterbody. Logically then, a TMDL analysis should consider all sources of the pollutant of concern in some manner. The detail provided in the source assessment step drives the rigor of the pollutant load allocation. In other words, it is only possible to specifically allocate quantifiable loads or load reductions to each identified source (or source category) when the relative load contribution from each source has been estimated. Therefore, the pollutant load from each identified source (or source category) should be specified and quantified. This may be accomplished using site-specific monitoring data, modeling, or application of other assessment techniques. If insufficient time or resources are available to accomplish this step, a phased/adaptive management approach may be appropriate. The approach should be clearly defined in the document.

#### Review Elements:

- The TMDL should include an identification of the point and nonpoint sources of the pollutant of concern, including the geographical location of the source(s) and the quantity of the loading, e.g., lbs/per day. This information is necessary for EPA to evaluate the WLA, LA and MOS components of the TMDL.
- The level of detail provided in the source assessment should be commensurate with the nature of the watershed and the nature of the pollutant being studied. Where it is possible to separate natural background from nonpoint sources, the TMDL should include a description of both the natural background loads and the nonpoint source loads.
- Natural background loads should not be assumed to be the difference between the sum of known and quantified anthropogenic sources and the existing *in situ* loads (e.g. measured in stream) unless it can be demonstrated that the anthropogenic sources of the pollutant of concern have been identified, characterized, and quantified.
- The sampling data relied upon to discover, characterize, and quantify the pollutant sources should be included in the document (e.g. a data appendix) along with a description of how the data were analyzed to characterize and quantify the pollutant sources. A discussion of the known deficiencies and/or gaps in the data set and their potential implications should also be included.

#### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

***Summary:*** *The TMDL document includes the landuse breakdown for the watershed based on the 2007 National Agricultural Statistics Service (NASS) data. In 2007, the dominant land use for the sub-watershed that drains to the listed segment of the Sheyenne River was agriculture, primarily crop production. Approximately 59 percent of the landuse in the watershed was cropland, 38 percent was grassland/pastureland, and the remaining 3 percent was wetlands, developed space, barren or woods. The majority of the crops grown consisted of soybeans, dry beans, corn and sunflowers.*

*Section 4.0, Significant Sources beginning on page 9, provides the pollutant source analysis for the listed segment of the Sheyenne River. There are no known point source discharges to the listed segment of the Sheyenne River.*

*There are five known animal feeding operations (AFOs) in the contributing watershed of the Sheyenne River. The five include four small (0-300 animal units (AUs)) and one large (1,000 AUs and greater) AFOs. All five AFOs have permits to operate, are zero discharge facilities and are not deemed significant point sources of E. coli bacteria loading to the impaired segment of the Sheyenne River.*

*The E. coli bacteria pollution to this segment originates from nonpoint sources in the watershed. Livestock grazing and watering in proximity to the stream and the contributing tributary watershed is common. Intense early summer storms can cause overland flooding and rising river levels. Due to the close proximity of livestock grazing and watering along tributaries in the watershed, it is likely that runoff from these activities contribute to the E. coli bacteria pollution in the Sheyenne River watershed.*

*Wildlife may also contribute to the E. coli bacteria found in the water quality samples, but most likely in a lower concentration. Wildlife is nomadic with fewer numbers concentrating in a specific area, thus decreasing the probability of their contribution of fecal matter in significant quantities.*

*Septic system failure might also contribute to the E. coli bacteria in the water quality samples. Failures can occur for several reasons, although the most common reason is improper maintenance (e.g. age, inadequate pumping). Other reasons for failure include improper installation, location, and system design. Harmful household chemicals can also cause failure by killing the bacteria that digest the waste. While the number of systems that are not functioning properly is unknown, it is estimated that 28 percent of the systems in North Dakota are failing.*

**Comments: No comments.**

## 4. TMDL Technical Analysis

TMDL determinations should be supported by an analysis of the available data, discussion of the known deficiencies and/or gaps in the data set, and an appropriate level of technical analysis. This applies to **all** of the components of a TMDL document. It is vitally important that the technical basis for **all** conclusions be articulated in a manner that is easily understandable and readily apparent to the reader.

A TMDL analysis determines the maximum pollutant loading rate that may be allowed to a waterbody without violating water quality standards. The TMDL analysis should demonstrate an understanding of the relationship between the rate of pollutant loading into the waterbody and the resultant water quality impacts. This stressor → response relationship between the pollutant and impairment and between the selected targets, sources, TMDLs, and load allocations needs to be clearly articulated and supported by an appropriate level of technical analysis. Every effort should be made to be as detailed as possible, and to base all conclusions on the best available scientific principles.

The pollutant loading allocation is at the heart of the TMDL analysis. TMDLs apportion responsibility for taking actions by allocating the available assimilative capacity among the various point, nonpoint, and natural pollutant sources. Allocations may be expressed in a variety of ways, such as by individual discharger, by tributary watershed, by source or land use category, by land parcel, or other appropriate scale or division of responsibility.

The pollutant loading allocation that will result in achievement of the water quality target is expressed in the form of the standard TMDL equation:

$$TMDL = \sum WLA_s + \sum LA_s + MOS$$

Where:

TMDL = Total Maximum Daily Load (also called the Loading Capacity)

LA<sub>s</sub> = Load Allocations

WLA<sub>s</sub> = Wasteload Allocations

MOS = Margin Of Safety

Review Elements:

- A TMDL must identify the loading capacity of a waterbody for the applicable pollutant, taking into consideration temporal variations in that capacity. EPA regulations define loading capacity as the greatest amount of a pollutant that a water can receive without violating water quality standards (40 C.F.R. §130.2(f)).
- The total loading capacity of the waterbody should be clearly demonstrated to equate back to the pollutant load allocations through a balanced TMDL equation. In instances where numerous LA, WLA and seasonal TMDL capacities make expression in the form of an equation cumbersome, a table may be substituted as long as it is clear that the total TMDL capacity equates to the sum of the allocations.

- The TMDL document should describe the methodology and technical analysis used to establish and quantify the cause-and-effect relationship between the numeric target and the identified pollutant sources. In many instances, this method will be a water quality model.
- It is necessary for EPA staff to be aware of any assumptions used in the technical analysis to understand and evaluate the methodology used to derive the TMDL value and associated loading allocations. Therefore, the TMDL document should contain a description of any important assumptions (including the basis for those assumptions) made in developing the TMDL, including but not limited to:

- the spatial extent of the watershed in which the impaired waterbody is located and the spatial extent of the TMDL technical analysis;
- the distribution of land use in the watershed (e.g., urban, forested, agriculture);
- a presentation of relevant information affecting the characterization of the pollutant of concern and its allocation to sources such as population characteristics, wildlife resources, industrial activities etc...;
- present and future growth trends, if taken into consideration in determining the TMDL and preparing the TMDL document (e.g., the TMDL could include the design capacity of an existing or planned wastewater treatment facility);
- an explanation and analytical basis for expressing the TMDL through surrogate measures, if applicable. Surrogate measures are parameters such as percent fines and turbidity for sediment impairments; chlorophyll *a* and phosphorus loadings for excess algae; length of riparian buffer; or number of acres of best management practices.

- The TMDL document should contain documentation supporting the TMDL analysis, including an inventory of the data set used, a description of the methodology used to analyze the data, a discussion of strengths and weaknesses in the analytical process, and the results from any water quality modeling used. This information is necessary for EPA to review the loading capacity determination, and the associated load, wasteload, and margin of safety allocations.
- TMDLs must take critical conditions (e.g., stream flow, loading, and water quality parameters, seasonality, etc...) into account as part of the analysis of loading capacity (40 C.F.R. §130.7(c)(1)). TMDLs should define applicable critical conditions and describe the approach used to determine both point and nonpoint source loadings under such critical conditions. In particular, the document should discuss the approach used to compute and allocate nonpoint source loadings, e.g., meteorological conditions and land use distribution.
- Where both nonpoint sources and NPDES permitted point sources are included in the TMDL loading allocation, and attainment of the TMDL target depends on reductions in the nonpoint source loads, the TMDL document must include a demonstration that nonpoint source loading reductions needed to implement the load allocations are actually practicable [40 CFR 130.2(i) and 122.44(d)].

Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

***Summary:*** *The technical analysis should describe the cause and effect relationship between the identified pollutant sources, the numeric targets, and achievement of water quality standards. It should also include a description of the analytical processes used, results from water quality modeling, assumptions and other pertinent information. The technical analysis for the Sheyenne River describes how the E. coli loads were derived in order to meet the applicable water quality standards for the 303(d) impaired stream segment.*



*The TMDL loads and loading capacities were derived using the load duration curve (LDC) approach as described in Section 5.0 of the TMDL. To better correlate the relationship between the pollutant of concern and the hydrology of the Section 303(d) listed waterbody, a LDC was developed for the Sheyenne River stream segment. Daily stream flow values were collected at USGS gage station 05055300 located on the Sheyenne River approximately 6.5 miles southeast of Maddock, ND. This gage station is collocated with the NDDoH monitoring station 385505 where the E. coli water quality samples were collected. Of the two NDDoH monitoring sites located along the impaired reach, this site showed the greatest impairment. Deriving the TMDL from data collected at this site will ensure the most protective measures for the entire segment.*

*A LDC was derived for the segment using the daily flow record, the 126 cfu/100 mL TMDL target (i.e., state water quality standard) and the observed E. coli data collected from the monitoring station (see Figure 6 of the TMDL document for a map of the monitoring locations).*

*Observed in-stream E. coli bacteria data, obtained from the monitoring station, was converted to pollutant loads by multiplying E. coli bacteria concentrations by the mean daily flow and a conversion factor. These loads were plotted against the percent exceeded flow on the day of sample collection (see Figure 9 in the TMDL document). Points plotted above the 126 cfu/100 mL target curve exceeded the State water quality standard or TMDL target. Points plotted below the curve are meeting the State water quality standard of 126 cfu/100 mL.*

*To estimate the required percent reduction in loading needed to achieve the TMDL for the stream segment, a linear regression line through the E. coli load data above the TMDL curve in each flow regime was plotted. The required percent reduction needed for the four regimes was determined using the linear regression line (see Appendix C in the TMDL document).*

*The LDC represents a flow-variable TMDL target across the flow regimes shown in the TMDL document. For the Sheyenne River segment covered by the TMDL, the LDC is a dynamic expression of the allowable daily load for any given daily flow. Loading capacities were derived from this approach for the listed stream segment at each flow regime. Table 7 shows the loading capacity load (i.e., TMDL load) for the listed segment of the Sheyenne River.*

**Comments: No Comments.**

## 4.1 Data Set Description

TMDL documents should include a thorough description and summary of all available water quality data that are relevant to the water quality assessment and TMDL analysis. An inventory of the data used for the TMDL analysis should be provided to document, for the record, the data used in decision making. This also provides the reader with the opportunity to independently review the data. The TMDL analysis should make use of all readily available data for the waterbody under analysis unless the TMDL writer determines that the data are not relevant or appropriate. For relevant data that were known but rejected, an explanation of why the data were not utilized should be provided (e.g., samples exceeded holding times, data collected prior to a specific date were not considered timely, etc...).

### Review Elements:

- TMDL documents should include a thorough description and summary of all available water quality data that are relevant to the water quality assessment and TMDL analysis such that the water quality impairments are clearly defined and linked to the impaired beneficial uses and appropriate water quality criteria.
- The TMDL document submitted should be accompanied by the data set utilized during the TMDL analysis. If possible, it is preferred that the data set be provided in an electronic format and referenced in the document. If electronic submission of the data is not possible, the data set may be included as an appendix to the document.

### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

***Summary:*** *The Sheyenne River TMDL data description and summary are included in the Available Data section (Section 1.5) and in the data table in Appendix A. Recent water quality monitoring was conducted from May – September 2009-2010 and included 40 E. coli samples. The data set also includes approximately 8 years of flow record from USGS gauging station 05055300 (co-located with sampling station 385505). The flow data, the E. coli data and the TMDL targets, were used to develop the E. coli load duration curve for the listed segment of the Sheyenne River.*

***Comments:*** *No Comments.*

## 4.2 Waste Load Allocations (WLA):

Waste Load Allocations represent point source pollutant loads to the waterbody. Point source loads are typically better understood and more easily monitored and quantified than nonpoint source loads. Whenever practical, each point source should be given a separate waste load allocation. All NPDES permitted dischargers that discharge the pollutant under analysis directly to the waterbody should be identified and given separate waste load allocations. The finalized WLAs are required to be incorporated into future NPDES permit renewals.

### Review Elements:

- EPA regulations require that a TMDL include WLAs, which identify the portion of the loading capacity allocated to individual existing and future point source(s) (40 C.F.R. §130.2(h), 40 C.F.R. §130.2(i)). In some cases, WLAs may cover more than one discharger, e.g., if the source is contained within a general permit. If no allocations are to be made to point sources, then the TMDL should include a value of zero for the WLA.
- All NPDES permitted dischargers given WLA as part of the TMDL should be identified in the TMDL, including the specific NPDES permit numbers, their geographical locations, and their associated waste load allocations.

### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

***Summary:*** *Within the drainage area of the listed segment of the Sheyenne River there are no known point source discharges. Therefore, the E. coli WLA for this segment is zero.*

*There are five known animal feeding operations (AFOs) in the contributing watershed of the Sheyenne River. The five include four small (0-300 animal units (AUs)) and one large (1,000 AUs or greater) AFOs. All five AFOs have permits to operate, are zero discharge facilities and are not deemed significant point sources of E. coli bacteria loading to the impaired segment of the Sheyenne River.*

***Comments:*** *No comments.*

### 4.3 Load Allocations (LA):

Load allocations include the nonpoint source, natural, and background loads. These types of loads are typically more difficult to quantify than point source loads, and may include a significant degree of uncertainty. Often it is necessary to group these loads into larger categories and estimate the loading rates based on limited monitoring data and/or modeling results. The background load represents a composite of all upstream pollutant loads into the waterbody. In addition to the upstream nonpoint and upstream natural load, the background load often includes upstream point source loads that are not given specific waste load allocations in this particular TMDL analysis. In instances where nonpoint source loading rates are particularly difficult to quantify, a performance-based allocation approach, in which a detailed monitoring plan and adaptive management strategy are employed for the application of BMPs, may be appropriate.

#### Review Elements:

- EPA regulations require that TMDL expressions include LAs which identify the portion of the loading capacity attributed to nonpoint sources and to natural background. Load allocations may range from reasonably accurate estimates to gross allotments (40 C.F.R. §130.2(g)). Load allocations may be included for both existing and future nonpoint source loads. Where possible, load allocations should be described separately for natural background and nonpoint sources.
- Load allocations assigned to natural background loads should not be assumed to be the difference between the sum of known and quantified anthropogenic sources and the existing *in situ* loads (e.g., measured in stream) unless it can be demonstrated that the anthropogenic sources of the pollutant of concern have been identified and given proper load or waste load allocations.

#### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

***Summary:*** *The TMDL document includes the landuse breakdown for the watershed based on the 2007 National Agricultural Statistics Service (NASS) data. In 2007, the dominant land use in the drainage area of the listed segment of the Sheyenne River was agriculture. Approximately 59 percent of the landuse in the watershed was cropland, 38 percent was grassland, pastureland or conservation reserve program lands and the remaining 3 percent was water, wetlands, developed space, barren or woods. The majority of the crops grown consist of soybeans, dry beans, corn and sunflowers.*

*The E. coli bacteria loading to this segment originate from nonpoint sources in the watershed. Intense early summer storms can cause overland flooding and rising river levels. Due to the close proximity of livestock grazing and watering to the river, it is likely that they contribute to the E. coli bacteria pollution in the listed segments of the Sheyenne River.*

*Wildlife and failing septic systems may also contribute to the E. coli bacteria found in the water quality samples, but most likely in a lower concentration.*

*By relating runoff characteristics to each flow regime one can infer which sources are most likely to contribute to E. coli bacteria loading. Animals grazing in the riparian area contribute E. coli bacteria by depositing manure where it has an immediate impact on water quality. Due to the close proximity of manure to the stream or by direct deposition in the stream, riparian grazing impacts water quality at high, moist and dry condition, and low flows. In contrast, intensive grazing of livestock in the upland and not in the riparian area has a high potential to impact water quality at high flows and medium impact at moist condition flows. Exclusion of livestock from the riparian area*

*eliminates the potential of direct manure deposit and, therefore, is considered to be of high importance at all flows. However, intensive grazing in the upland creates the potential for manure accumulation and availability for runoff at high flows and a high potential for E. coli bacteria contamination.*

*Source specific data are limited so an aggregate LA is assigned to nonpoint sources with a ranking of important contributors under various flow regimes provided as seen in the following excerpted table. An aggregate LA for the impaired segment of the Sheyenne River is included in Table 7 of the TMDL document.*

**Table 5. Nonpoint Sources of Pollution and Their Potential to Pollute at a Given Flow Regime.**

Nonpoint Sources	Flow Regime		
	High Flow	Moist Conditions	Dry Conditions
Riparian Area Grazing (Livestock)	H	H	H
Animal Feeding Operations	H	M	L
Manure Application to Crop and Range Land	H	M	L
Intensive Upland Grazing (Livestock)	H	M	L

Note: Potential importance of nonpoint source area to contribute E. coli bacteria loads under a given flow regime. (H: High; M: Medium; L: Low)

**Comments:** *No comments.*

#### 4.4 Margin of Safety (MOS):

Natural systems are inherently complex. Any mathematical relationship used to quantify the stressor → response relationship between pollutant loading rates and the resultant water quality impacts, no matter how rigorous, will include some level of uncertainty and error. To compensate for this uncertainty and ensure water quality standards will be attained, a margin of safety is required as a component of each TMDL. The MOS may take the form of an explicit load allocation (e.g., 10 lbs/day), or may be implicitly built into the TMDL analysis through the use of conservative assumptions and values for the various factors that determine the TMDL pollutant load → water quality effect relationship. Whether explicit or implicit, the MOS should be supported by an appropriate level of discussion that addresses the level of uncertainty in the various components of the TMDL technical analysis, the assumptions used in that analysis, and the relative effect of those assumptions on the final TMDL. The discussion should demonstrate that the MOS used is sufficient to ensure that the water quality standards would be attained if the TMDL pollutant loading rates are met. In cases where there is substantial uncertainty regarding the linkage between the proposed allocations and achievement of water quality standards, it may be necessary to employ a phased or adaptive management approach (e.g., establish a monitoring plan to determine if the proposed allocations are, in fact, leading to the desired water quality improvements).

##### Review Elements:

- TMDLs must include a margin of safety (MOS) to account for any lack of knowledge concerning the relationship between load and wasteload allocations and water quality (CWA §303(d) (1) (C), 40 C.F.R. §130.7(c)(1) ). EPA's 1991 TMDL Guidance explains that the MOS may be implicit (i.e., incorporated into the TMDL through conservative assumptions in the analysis) or explicit (i.e., expressed in the TMDL as loadings set aside for the MOS).
- If the MOS is implicit, the conservative assumptions in the analysis that account for the MOS should be identified and described. The document should discuss why the assumptions are considered conservative and the effect of the assumption on the final TMDL value determined.
- If the MOS is explicit, the loading set aside for the MOS should be identified. The document should discuss how the explicit MOS chosen is related to the uncertainty and/or potential error in the linkage analysis between the WQS, the TMDL target, and the TMDL loading rate.
- If, rather than an explicit or implicit MOS, the TMDL relies upon a phased approach to deal with large and/or unquantifiable uncertainties in the linkage analysis, the document should include a description of the planned phases for the TMDL as well as a monitoring plan and adaptive management strategy.

##### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

***Summary:*** *The Sheyenne River TMDL document includes an explicit MOS for the listed segment of the stream. The MOS was derived by calculating 10 percent of the loading capacity. The explicit MOS for the Sheyenne River is included in Table 7 of the TMDL document.*

***Comments:*** *No comments.*

#### 4.5 Seasonality and variations in assimilative capacity:

The TMDL relationship is a factor of both the loading rate of the pollutant to the waterbody and the amount of pollutant the waterbody can assimilate and still attain water quality standards. Water quality standards often vary based on seasonal considerations. Therefore, it is appropriate that the TMDL analysis consider seasonal variations, such as critical flow periods (high flow, low flow), when establishing TMDLs, targets, and allocations.

Review Elements:

- The statute and regulations require that a TMDL be established with consideration of seasonal variations. The TMDL must describe the method chosen for including seasonal variability as a factor. (CWA §303(d)(1)(C), 40 C.F.R. §130.7(c)(1) ).

Recommendation:

- Approve  Partial Approval  Disapprove  Insufficient Information

***Summary:*** *By using the load duration curve approach to develop the TMDL allocations seasonal variability in fecal coliform loads are taken into account. The highest stream flows typically occur during late spring, and the lowest stream flows typically occur during the winter months. The TMDL also considers seasonality because the fecal coliform criteria are in effect from May 1 to September 30, as defined by the recreation season in North Dakota.*

***Comments:*** *No comments.*

## 5. Public Participation

EPA regulations require that the establishment of TMDLs be conducted in a process open to the public, and that the public be afforded an opportunity to participate. To meaningfully participate in the TMDL process it is necessary that stakeholders, including members of the general public, be able to understand the problem and the proposed solution. TMDL documents should include language that explains the issues to the general public in understandable terms, as well as provides additional detailed technical information for the scientific community. Notifications or solicitations for comments regarding the TMDL should be made available to the general public, widely circulated, and clearly identify the product as a TMDL and the fact that it will be submitted to EPA for review. When the final TMDL is submitted to EPA for approval, a copy of the comments received by the state and the state responses to those comments should be included with the document.

### Review Elements:

- The TMDL must include a description of the public participation process used during the development of the TMDL (40 C.F.R. §130.7(c)(1)(ii) ).
- TMDLs submitted to EPA for review and approval should include a summary of significant comments and the State's/Tribe's responses to those comments.

### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

***Summary:*** *The TMDL document includes a summary of the public participation process that has occurred. It describes the opportunities the public had to be involved in the TMDL development process. Letters notifying stakeholders of the availability of the draft TMDL document were mailed to stakeholders in the watershed during public comment. Also, the draft TMDL document was posted on NDoDH's Water Quality Division website, and a public notice for comment was published in local newspapers.*

***Comments:*** *No comments.*



## 6. Monitoring Strategy

TMDLs may have significant uncertainty associated with the selection of appropriate numeric targets and estimates of source loadings and assimilative capacity. In these cases, a phased TMDL approach may be necessary. For Phased TMDLs, it is EPA's expectation that a monitoring plan will be included as a component of the TMDL document to articulate the means by which the TMDL will be evaluated in the field, and to provide for future supplemental data that will address any uncertainties that may exist when the document is prepared.

### Review Elements:

- When a TMDL involves both NPDES permitted point source(s) and nonpoint source(s) allocations, and attainment of the TMDL target depends on reductions in the nonpoint source loads, the TMDL document should include a monitoring plan that describes the additional data to be collected to determine if the load reductions provided for in the TMDL are occurring.
- Under certain circumstances, a phased TMDL approach may be utilized when limited existing data are relied upon to develop a TMDL, and the State believes that the use of additional data or data based on better analytical techniques would likely increase the accuracy of the TMDL load calculation and merit development of a second phase TMDL. EPA recommends that a phased TMDL document or its implementation plan include a monitoring plan and a scheduled timeframe for revision of the TMDL. These elements would not be an intrinsic part of the TMDL and would not be approved by EPA, but may be necessary to support a rationale for approving the TMDL. [http://www.epa.gov/owow/tmdl/tmdl\\_clarification\\_letter.pdf](http://www.epa.gov/owow/tmdl/tmdl_clarification_letter.pdf)

### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

***Summary:*** *Once a watershed restoration plan (e.g., Section 319 PIP) is developed and implemented, monitoring will be conducted in the stream beginning two years after implementation and extending five years after the implementation project is complete.*

***Comments:*** *No comments.*

## 7. Restoration Strategy

The overall purpose of the TMDL analysis is to determine what actions are necessary to ensure that the pollutant load in a waterbody does not result in water quality impairment. Adding additional detail regarding the proposed approach for the restoration of water quality is not currently a regulatory requirement, but is considered a value added component of a TMDL document. During the TMDL analytical process, information is often gained that may serve to point restoration efforts in the right direction and help ensure that resources are spent in the most efficient manner possible. For example, watershed models used to analyze the linkage between the pollutant loading rates and resultant water quality impacts might also be used to conduct “what if” scenarios to help direct BMP installations to locations that provide the greatest pollutant reductions. Once a TMDL has been written and approved, it is often the responsibility of other water quality programs to see that it is implemented. The level of quality and detail provided in the restoration strategy will greatly influence the future success in achieving the needed pollutant load reductions.

### Review Elements:

- EPA is not required to and does not approve TMDL implementation plans. However, in cases where a WLA is dependent upon the achievement of a LA, “reasonable assurance” is required to demonstrate the necessary LA called for in the document is practicable. A discussion of the BMPs (or other load reduction measures) that are to be relied upon to achieve the LA(s), and programs and funding sources that will be relied upon to implement the load reductions called for in the document, may be included in the implementation/restoration section of the TMDL document to support a demonstration of “reasonable assurance”.

### Recommendation:

- Approve  Partial Approval  Disapprove  Insufficient Information

***Summary:*** Implementation of this TMDL is dependent upon the availability of Section 319 NPS funds or other watershed restoration programs (e.g. USDA EQIP), as well as securing a local project sponsor and the required matching funds. Provided these three requirements are in place, a project implementation plan (PIP) will be developed in accordance with the TMDL and submitted to the North Dakota Nonpoint Source Pollution Task Force and US EPA for approval. The implementation of the BMPs contained in the NPS PIP is voluntary. Therefore, success of any TMDL implementation project is ultimately dependent on the ability of the local project sponsor to find cooperating producers.

***Comments:*** No comments.

## 8. Daily Loading Expression

The goal of a TMDL analysis is to determine what actions are necessary to attain and maintain WQS. The appropriate averaging period that corresponds to this goal will vary depending on the pollutant and the nature of the waterbody under analysis. When selecting an appropriate averaging period for a TMDL analysis, primary concern should be given to the nature of the pollutant in question and the achievement of the underlying WQS. However, recent federal appeals court decisions have pointed out that the title TMDL implies a “daily” loading rate. While the most appropriate averaging period to be used for developing a TMDL analysis may vary according to the pollutant, a daily loading rate can provide a more practical indication of whether or not the overall needed load reductions are being achieved. When limited monitoring resources are available, a daily loading target that takes into account the natural variability of the system can serve as a useful indicator for whether or not the overall load reductions are likely to be met. Therefore, a daily expression of the required pollutant loading rate is a required element in all TMDLs, in addition to any other load averaging periods that may have been used to conduct the TMDL analysis. The level of effort spent to develop the daily load indicator should be based on the overall utility it can provide as an indicator for the total load reductions needed.

### Review Elements:

- The document should include an expression of the TMDL in terms of a daily load. However, the TMDL may also be expressed in temporal terms other than daily (e.g., an annual or monthly load). If the document expresses the TMDL in additional “non-daily” terms the document should explain why it is appropriate or advantageous to express the TMDL in the additional unit of measurement chosen.

### Recommendation:

- Approve    Partial Approval    Disapprove    Insufficient Information

***Summary:*** *The TMDL document for the listed segment of the Sheyenne River includes daily loads expressed as colony forming units per day. The daily TMDL loads are included in the TMDL section (i.e., Section 7.0), of the document.*

***Comments:*** *No comments.*